SERIES: SDI160G-UD | DESCRIPTION: AC-DC POWER SUPPLY

FEATURES

- up to 160 W continuous power
- gallium nitride (GaN) technology
- universal input (90~264 Vac)
- over voltage, over current, over temperature and short circuit protections
- IEC 62368-1 compliant
- power factor correction
- compact design
- custom design available

MODEL	output voltage (Vac)	output current max (A)	output power max (W)	ripple and noise[1] max (mVp-p)	efficiency[2] typ (%)
SDI160G-12-UD-P51	12	12.5	150	120	90
SDI160G-19-UD-P51	19	8.4	160	190	90
SDI160G-24-UD-P51	24	6.6	160	240	90
SDI160G-48-UD-P51	48	3.3	160	480	90
SDI160G-56-UD-P51	56	2.86	160	560	90

Notes: 1. Ripple & noise measurement, use a 20 MHz bandwidth frequency oscilloscope and add 0.1 µF ceramic and 10 µF electrolytic capacitor at output terminals.
2. Average efficiency measured at 25, 50, 75 & 100% load.

PART NUMBER KEY

SDI160G - XX - UDX - P51 - CXX

Base Number

Output Voltage

AC Inlet Type:
IEC320/C8

Input Cable:
"Blank" = No Cable
C = North America input cable
2 = Europe input cable
3 = United Kingdom input cable
4 = Australia input cable
5 = China input cable
6 = South Korea input cable
7 = Brazil input cable
8 = South Africa input cable
9 = Japan input cable

DC Plug Type:
XXX = See output plug options on page 5 for more details

Reserved for Custom Configurations

Please read our datasheet & drawing disclaimer here.

Downloaded from Arrow.com.

INPUT

parameter	conditions/description	min	typ	max	units
voltage		90	100~240	264	Vac
frequency		47	50~60	63	Hz
current	at full load			2.2	A
inrush current	at 230 Vac, full load, 25°C, cold start			100	A
leakage current		0.25			mA
power factor correction	at 115 Vac & 230 Vac, at full load	0.9			
no load power consumption	at 115 Vac, 230 Vac & no load			0.15	W

OUTPUT

parameter	conditions/description	min	typ	max	units
regulation				5	%

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	shut down, latch			180	%
over current protection	shut down, auto recover			180	%
short circuit protection	shut down, auto recover				%

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output	3000			Vac
isolation resistance	primary to secondary, 500 Vdc			10	MΩ
safety approvals	UL & CUL, UKCA				
EMI/EMC	CE / FCC Class B				
MTBF	as per Telcordia SR-332, 25°C	300,000			hours

Downloaded from Arrow.com.

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature		0		40	°C
storage temperature		-20		80	°C
operating humidity	non-condensing	20		80	%
storage humidity	non-condensing	10		90	%

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	150 x 54 x 33				mm
weight			495		g
cooling	by natural air				

MECHANICAL DRAWING

units: mm
tolerance: ±0.1 mm

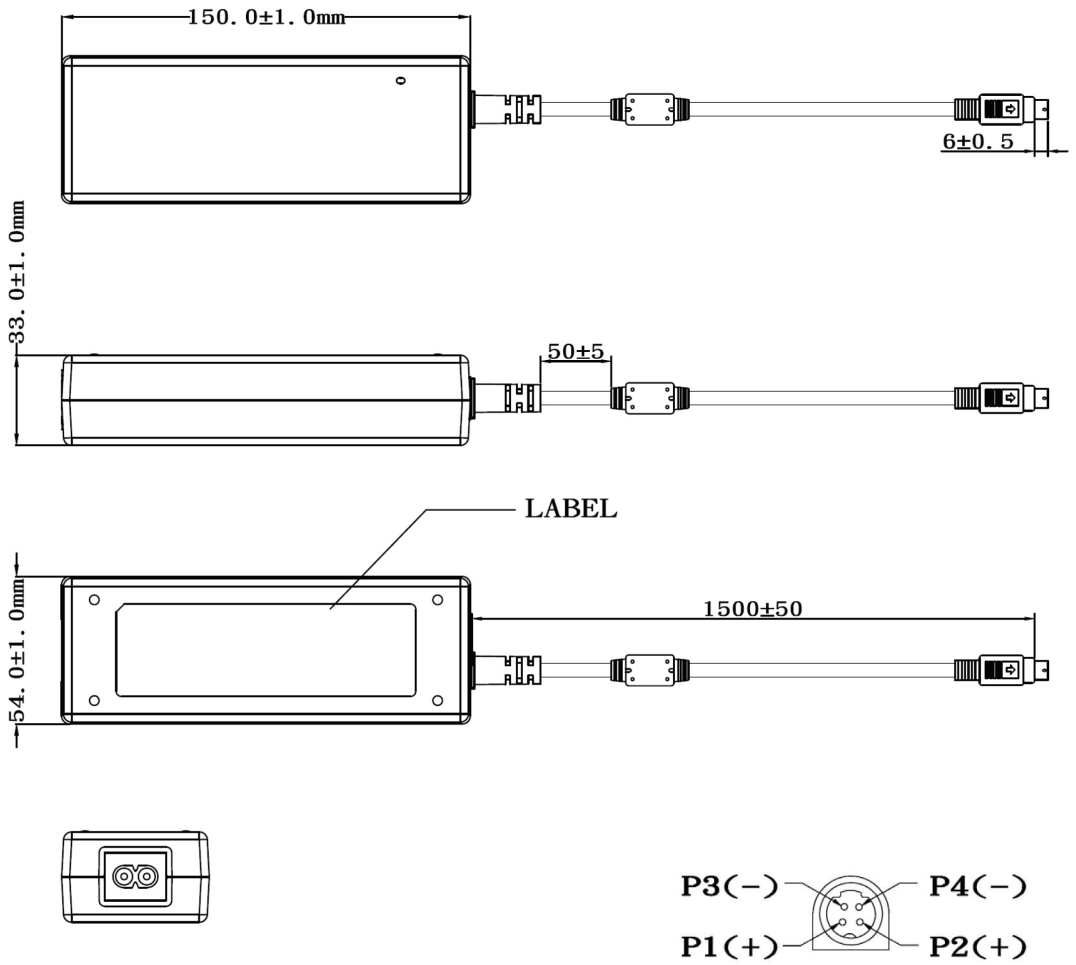

Downloaded from Arrow.com.

DC CORD

units: mm

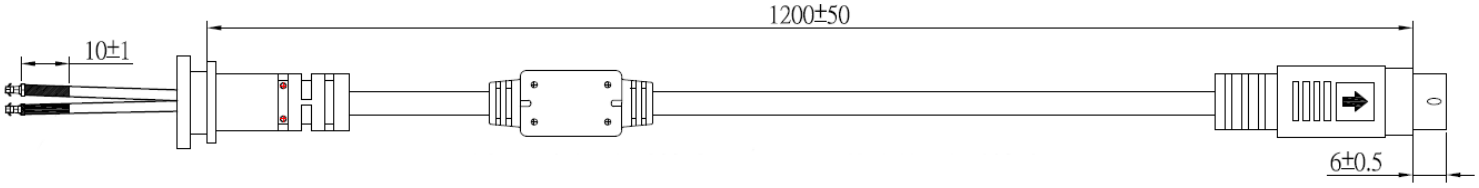

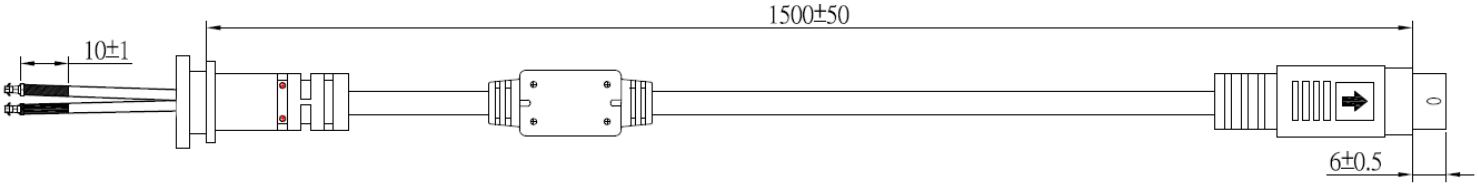

MODEL NO.	CABLE	CORD LENGTH
SDI160G-12	UL2464, 16 AWG	1,200 mm ±50
SDI160G-19	UL2095, 18 AWG	1,500 mm ±50
SDI160G-24	UL2464, 18 AWG	1,500 mm ±50
SDI160G-48	UL2095, 18 AWG	1,500 mm ±50
SDI160G-56	UL2095, 18 AWG	1,500 mm ±50

Downloaded from Arrow.com.

AC CORDS

units: mm

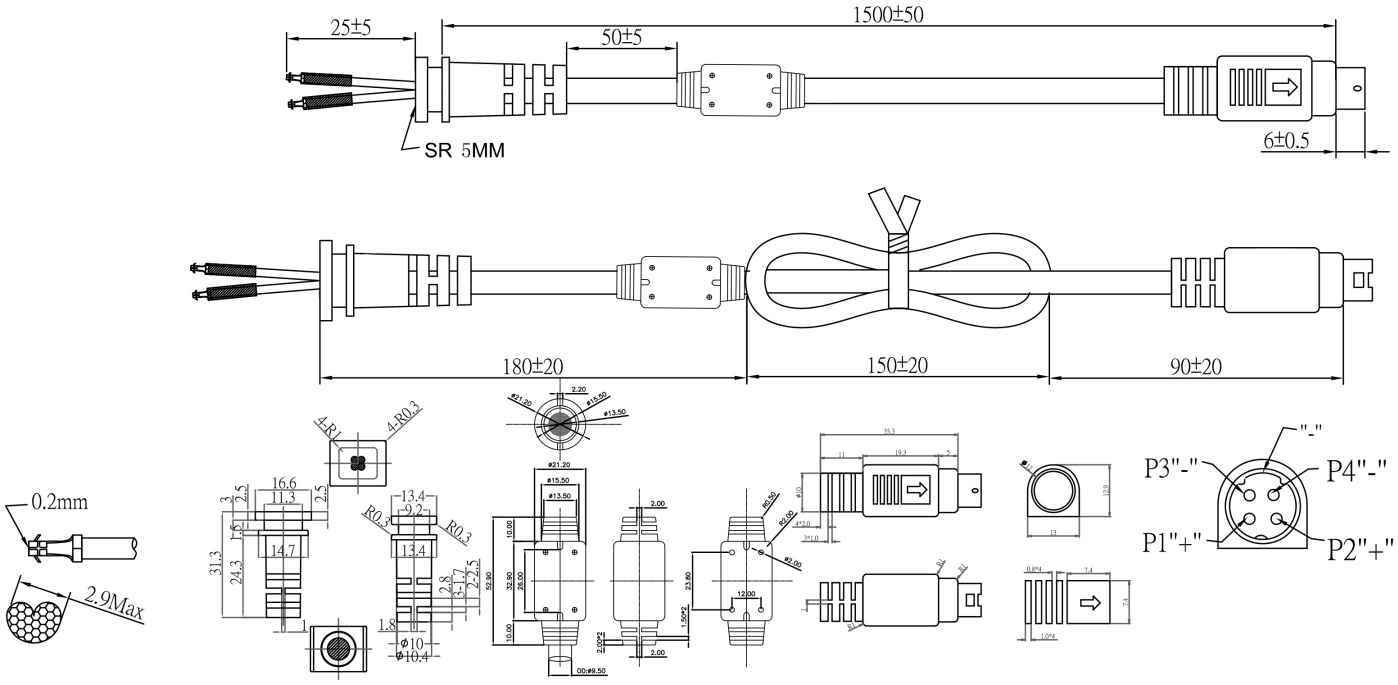

Downloaded from Arrow.com.

REVISION HISTORY

rev.	description	date
1.0	initial release	06/12/2020
1.01	UKCA added to the specification	05/25/2021
1.02	dc cord updated	06/15/2021
1.03	cable table updated	03/23/2022
1.04	input voltage updated	01/18/2023

The revision history provided is for informational purposes only and is believed to be accurate.

CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Downloaded from Arrow.com.