





NOTES:

- ROHS COMPLIANT
- HEADER: PHENOLIC WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
 - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e 23Z467SMFNL BECOMES 23Z467SMFNLT).








FINAL OUTLINE

@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SIN,10D,1:2,SM,TU	23Z467SMFNL-11	PS-2755.001-A	1 OF 3	23Z467SMFNL	A





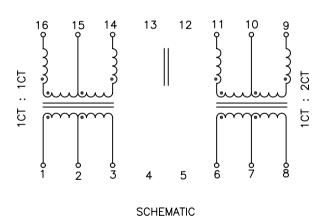

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED

PARAMETER	SPECIFICATIONS				
OPERATING TEMPERATURE	0°C - 70 °C				
POLARITY	PER SCHEMATIC				
TURNS RATIO (F=10 KHZ)	$(1-3)$: $(16-14)$ = 1CT : 1CT $\pm 2\%$ $(6-8)$: $(11-9)$ = 1CT : 2CT $\pm 2\%$ $(16-15)$: $(15-14)$ = 1:1 $\pm 2\%$ WITH PINS $(1-3)$ SHORTED $(11-10)$: $(10-9)$ = 1:1 $\pm 2\%$ WITH PINS $(6-8)$ SHORTED				
COUPLING CAPACITANCE	(1-3)-(16-14) = 8.0 pF MAX. (6-8)-(11-9) = 12.0 pF MAX. (V=20mV, F=100 KHz)				
LEAKAGE INDUCTANCE	(1-3)-(16-14) = 0.3 uH MAX. (6-8)-(11-9) = 0.20 uH MAX. (V=20mV, F=100 KHz)				
LP (V=20mV, F=10 KHz)	(1-3) = 98 uH MIN. (11-9) = 70 uH MIN. 15 - (16-14) = 42 uH MIN.				
DCR	(1-3), $(16-14) = 0.6$ OHM MAX. (6-8), $(11-9) = 0.6$ OHM MAX. (15-16), $(15-14) = 0.3$ OHM MAX. (10-11), $(10-9) = 0.3$ OHM MAX.				
BETWEEN CHANNEL ISOLATION	1500 VAC FOR 60 SECONDS				


@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SIN,10D,1:2,SM,TU	23Z467SMFNL-11	PS-2755.001-A	2 OF 3	23Z467SMFNL	A

PHONE: USA: 858 674 8100, GERMANY: 49 7032 78060, SINGAPORE: 65 6287 8998, SHANGHAI: 86 21 62787060, TAIWAN: 886 3 4356768







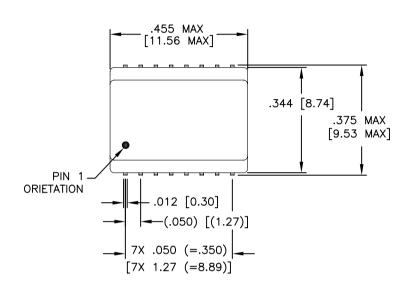

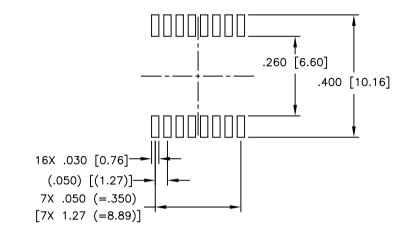

SUGGESTED LAND PATTERN

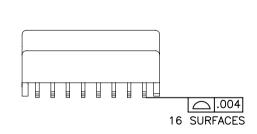

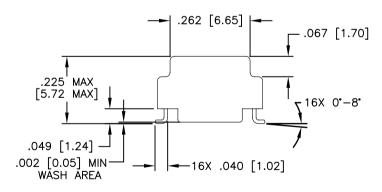

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY. $.XX = \pm .01$ [± 0.25] $.XXX = \pm .005$ [± 0.13]

@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SIN,10D,1:2,SM,TU	23Z467SMFNL-11	PS-2755.001-A	3 OF 3	23Z467SMFNL	Α