




Part Number : [347290162](#)
Product Description : Stac64 Receptacle Housing,
16 Circuits, Dual Row, Polarization C, Brown, Tray
Series Number : 34729
Status : Active
Product Category : Connector Housings

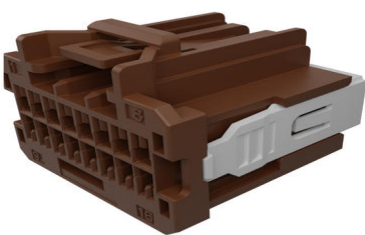

Documents and Resources

Drawings

[347290162_sd.pdf](#)
[PK-31301-201-001.pdf](#)

3D Models and Design Files

[STEP AP242](#)
[SOLIDWORKS](#)
[Creo](#)

Specifications

[347290200-AS-CH-000.pdf](#)
[AS-34729-020-001.pdf](#)
[PS-34729-020-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant
China RoHS	 per SJ/T 11365-2006
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS

- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Connector Housings
Series	34729
Description	Stac64 Receptacle Housing, 16 Circuits, Dual Row, Polarization C, Brown, Tray
Application	Automotive, Wire-to-Board
Product Name	Stac64
UPC	884982006607

Physical

Circuits (maximum)	16
Color - Resin	Brown
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	No
Lock to Mating Part	Yes
Material - Resin	High Temperature Thermoplastic
Net Weight	6.600/g
Number of Rows	2
Packaging Type	Tray
Panel Mount	N/A

Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarization	C
Polarized to Mating Part	Yes
Stackable	Yes
Temperature Range - Operating	-40° to +100°C

Solder Process Data

Max-Duration	40
Lead-Free Process Capability	SMC&WAVE
Max-Cycle	3
Max-Temp	260

Mates With / Use With

Mates with Part(s)

Description	Part Number
Stac64 Vertical Header Assemblies	<u>34690</u>
Stac64 Right-Angle Header Assemblies	<u>34691</u>

Use with Part(s)

Description	Part Number
CTX64 Female Terminals	<u>34803</u>

This document was generated on May 20, 2026