
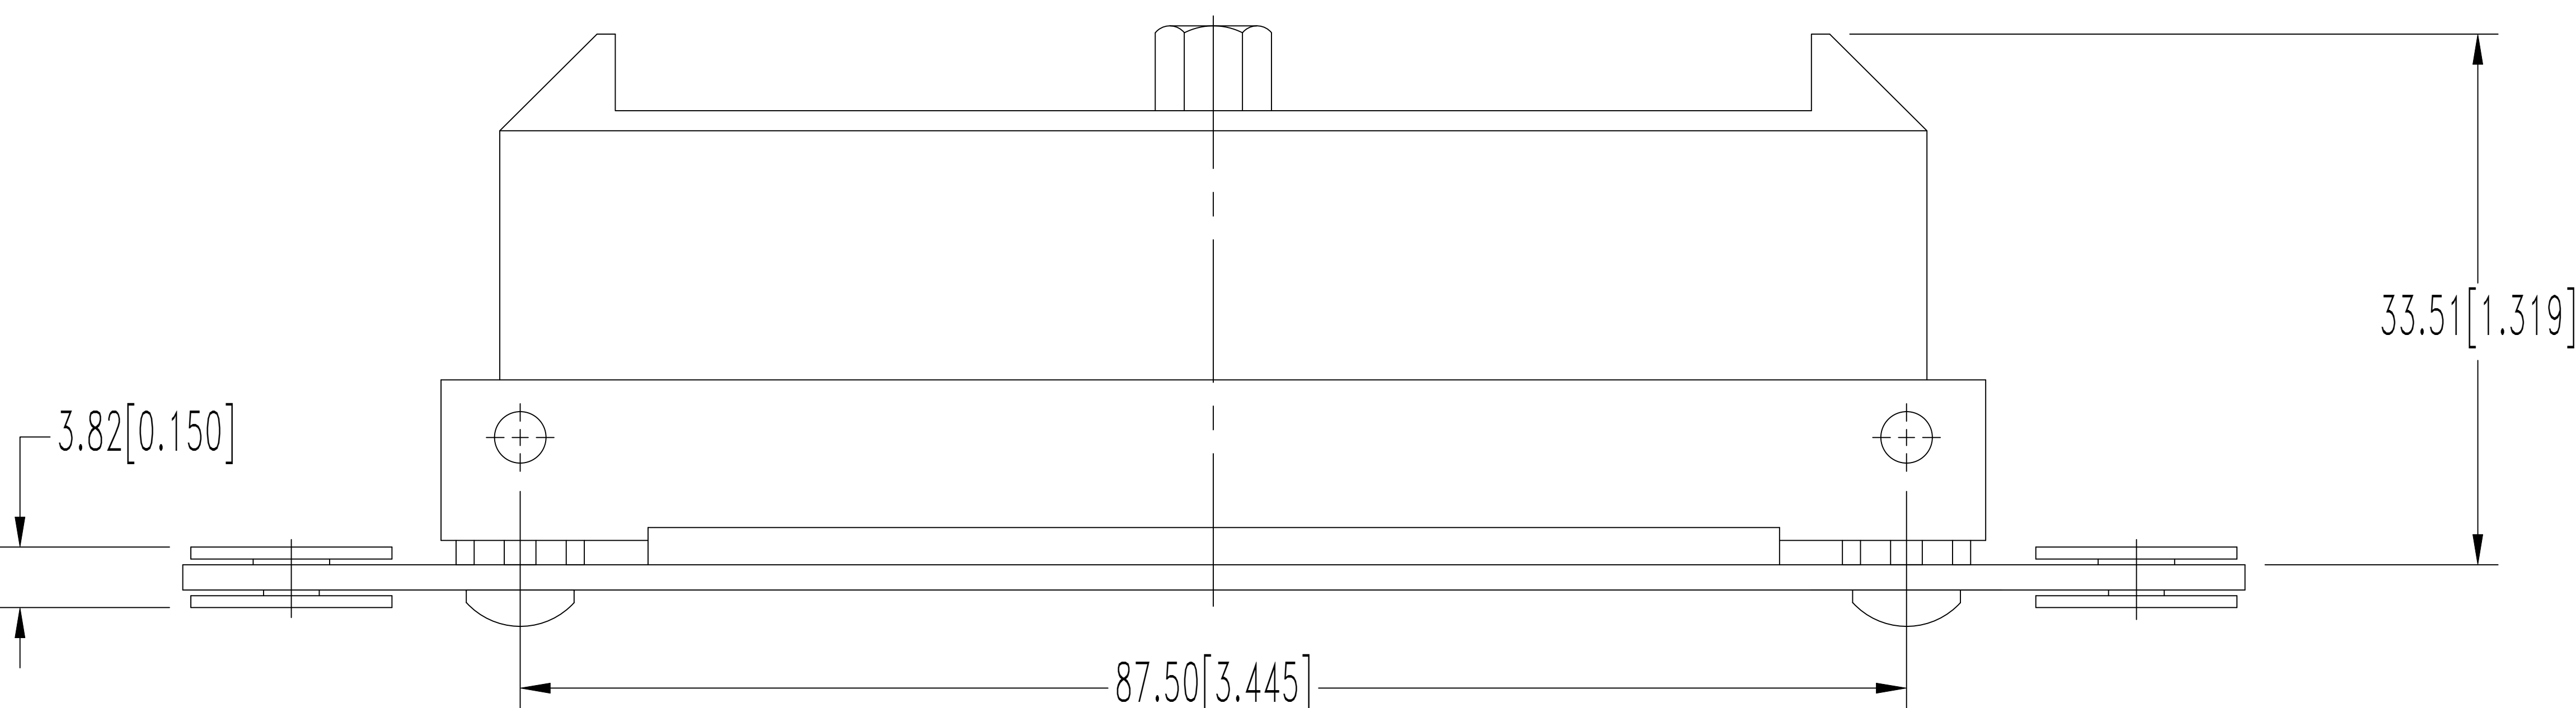
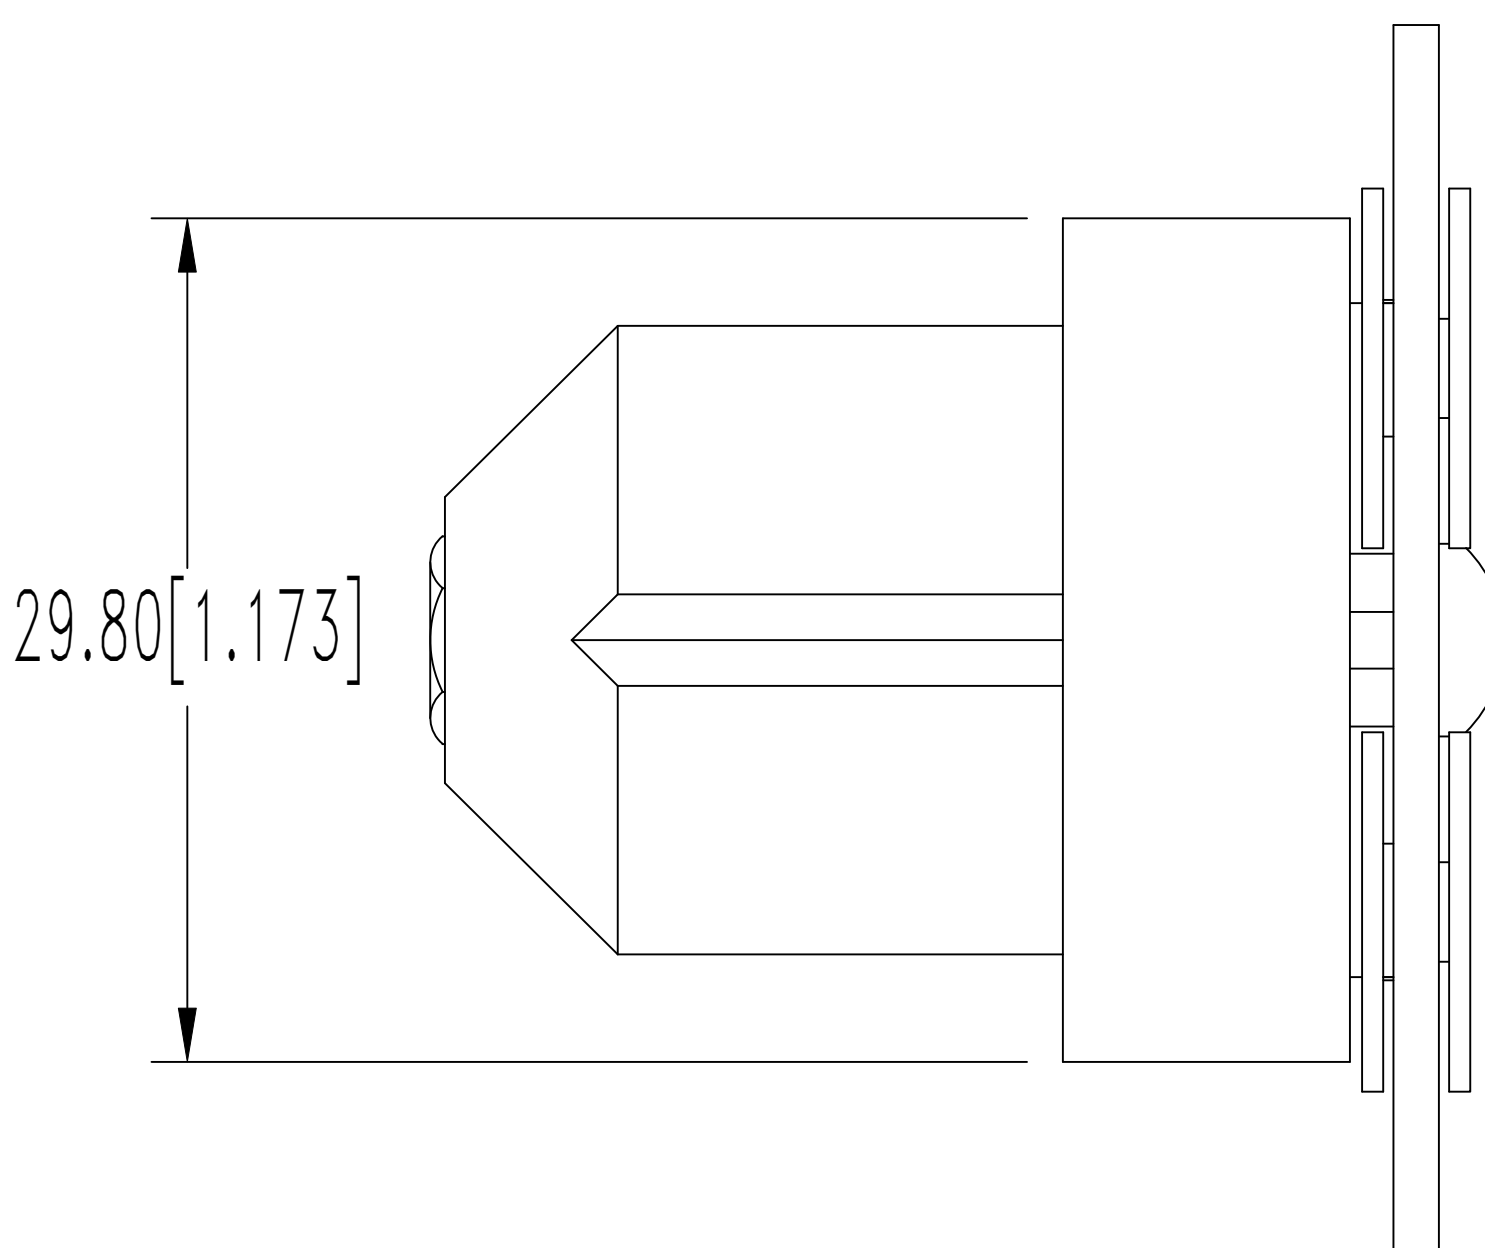


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK2846

DATE	REV	REVISION	RECORD	APP	DR	CK
5-16 97	NC	ECO	11880	RCW	MS	MZ
4-25 00	A	ECO	16237		JLG	

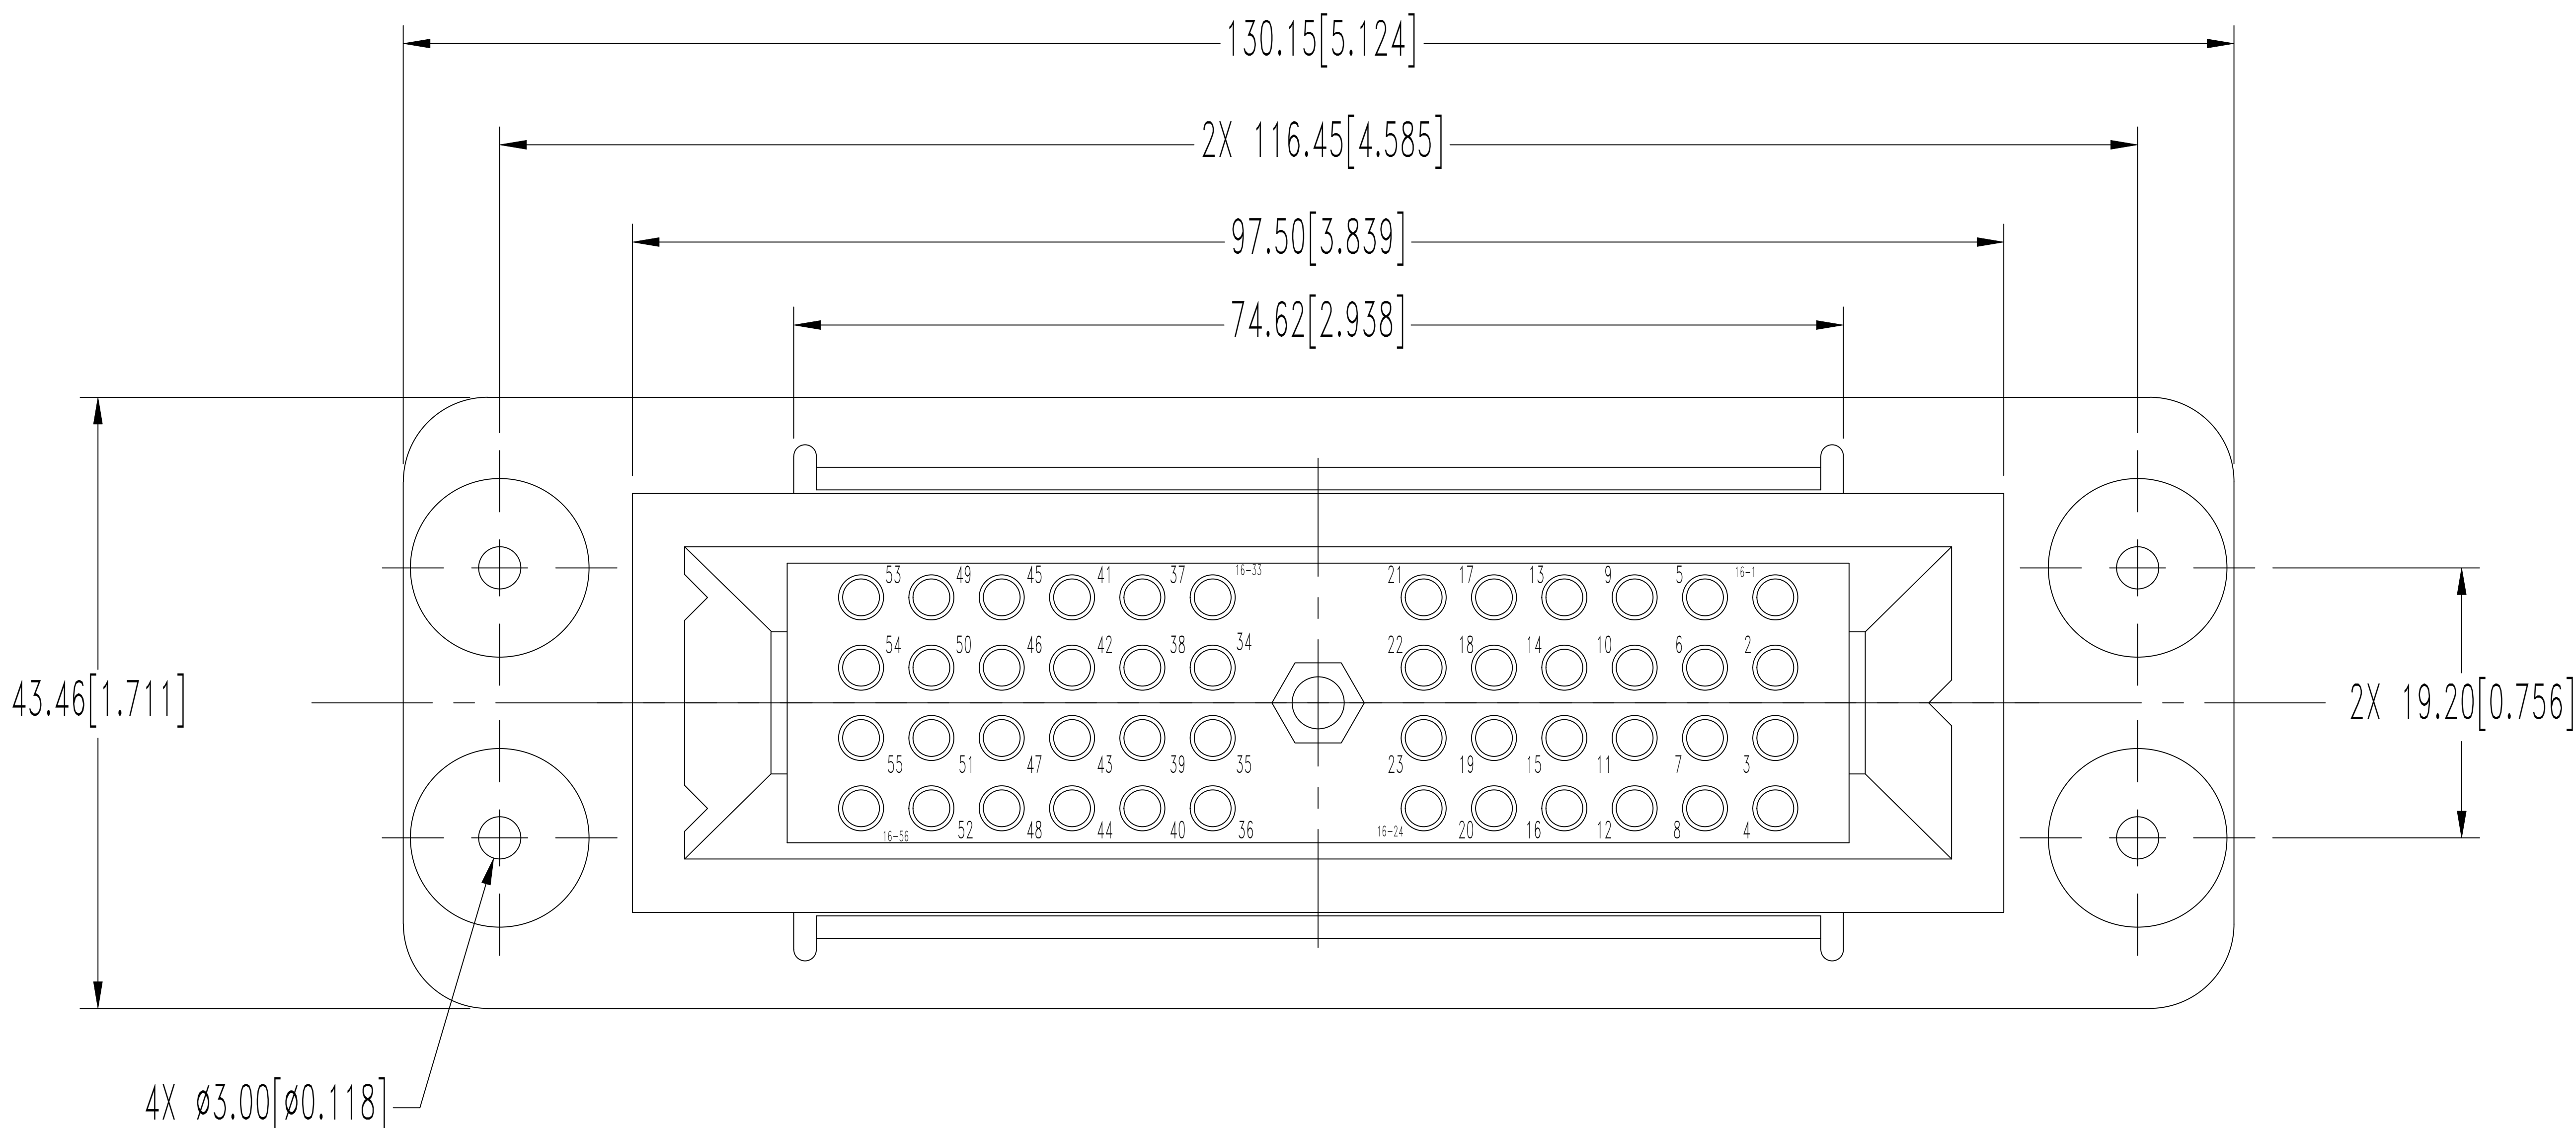

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.

CONTACTS ORDERED SEPARATELY.

SCREWS: STEEL, ZINC PLATE.

JACKSCREWS: STAINLESS STEEL, PASSIVATED.

MOUNTING PLATE: STEEL, ZINC PLATE.

2. MECHANICAL CHARACTERISTICS:

BLIND MATING SYSTEM MALE AND FEMALE CONNECTOR BODIES


PROVIDE "LEAD-IN" FOR 7.6 mm [0.30 in.] DIAMETRAL MISALIGNMENT.

3. POLARIZATION: PROVIDED BY CONNECTOR BODY DESIGN.

4. CLIMATIC CHARACTERISTICS:


WORKING TEMPERATURE: -55°C TO +125°C.

5. DIMENSIONS ARE IN MILLIMETERS [INCHES].

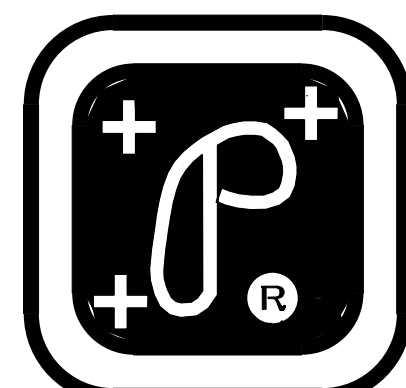

POSITRONIC
INDUSTRIES INC.

SPRINGFIELD, MISSOURI 65801

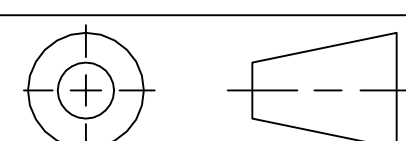DECIMAL TOL.
± 0.38 [0.015]

INFINITY SERIES

SCALE
N.T.S.

DRAWN BY	M. SNOW
APPROVED BY	RCW

TITLE

WF # 23503

ANGULAR TOL.
 $\pm 5^{\circ}$

DATE _____

5-16-97

DRAWING NUMBER

SK2846

REV.

A