

## RAFIX FS switching element universal QC, silver, light guide, for LED clip, 1 NO



### Description

These switching elements have external plungers and therefore can only be combined with pushbuttons, selector switches and keylock switches. The QC switching elements can be latched into the actuators without the need for tools and with little effort. Wiring is performed in the conventional manner – directly with male quick-connect terminals. The fast and inexpensive version – in cases where no PCB is cost-effective.

While the NO contacts are labeled 13/14 or 23/24, the NC contacts are labeled 11/12 or 21/22. In the connection drawing, the first contact is described as contact A, while the second contact is described as contact B.

#### QC mounting depths

- 26.8 mm for RAFIX 22 FS+ and RAFIX 22 FSR
- 32.8 mm for RAFIX 30 FS+:

- QC contact block for RAFIX 22 FS+, RAFIX FSR and RAFIX 30 FS
- Connection: QC = Quick Connect
- Only suitable for pushbuttons, selector and key-operated switches, not for mushroom pushbuttons and emergency stop
- Silver contacts (= black housing)
- Version with light guide for SMT LED, without light guide for THT LED
- labelling:
  - normally closed contacts = red plungers
  - NO contacts = green plungers
  - NC and NO contacts = yellow plungers



### technical data

#### ➤ general

Disassembly possible	no	<b>direct links</b>
Color	black	➤ <a href="#">RAFI eCatalog</a>
Operating temperature, min.	-40 °C	
Operating temperature, max.	85 °C	
Storage temperature, min.	-40 °C	
Storage temperature, max.	85 °C	
illuminated	Yes	
Luminous elements	LED	
Lamp socket	LED clip	
Packaging unit	10 pcs.	
Net weight	4 g	

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they are expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 1/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
[www.rafi-group.com](http://www.rafi-group.com),  
[info.headquarters@rafi-group.com](mailto:info.headquarters@rafi-group.com)

Operating life electrical	1,000,000 (1A / 250V AC) cycles 100,000 (2A / 250V AC) cycles 30,000 (4A / 250V AC) cycles
B10 electrical	1.300.000 (1A / 250V AC) cycles 130.000 (2A / 250V AC) cycles 40.000 (4A / 250V AC) cycles
Environment resistance	IEC 60068-2-14 IEC 60068-2-30 IEC 60068-2-33 IEC 60068-2-78
Shock resistance according to standard IEC 60068-2-27	15 g at 11 ms amplitude semi-sinusoidal
Vibration resistance according to standard IEC 60068-2-6	5 g at 10 - 500 Hz
Minimum order quantity (MOQ)	10 pcs.
RoHS compliant	Yes
REACH compliant	Yes
Country of origin	HU
<b>&gt; mounting diameters</b>	
Outside dimension, length	19.7 mm
Outside dimension, width	18.6 mm
Outside dimension, height	30.65 mm
Mounting depth	27 mm
<b>&gt; mechanical data</b>	
Connection marking	Normally Open: 13/14, 23/24
Terminal on the rear	Flat quick-connect terminal 2.8 x 0.8
Fixing	Latching
Operating force, max.	100 N
Contact function	1 NO
Contact system	Bridge contact
Contact material	Silver
Solderability	No
<b>&gt; electrical data</b>	
Rated insulation voltage	250 V
Rated surge voltage	2,500 V
Rated voltage, min.	10 V
Rated voltage, max.	250 V
Voltage type	AC / DC
Rated operating voltage	10-250 V
Rated current, min.	0.01 A
Rated current, max.	4 A
Rated power, min.	0.5 W
Power loss	0.32000 W
Category of use AC-15 / B300	120 V / 3 A (IEC 60947) 240 V / 1,5 A (IEC 60947)
Categories of use	AC-15 / B300 DC-13 / Q300

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they are expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 2/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
www.rafi-group.com,  
info.headquarters@rafi-group.com

Category of use DC-13 / Q300	120 V / 0,55 A (IEC 60947)
	240 V / 0,27 A (IEC 60947)
Conditional short circuit current	1,000 A
Rated surge voltage	2,500 V

**Use according to UL:**

RAFIX control devices are defined at RAFI as modular elements, consisting of an actuating element, if necessary a coupling and an individual contact or lighting unit.

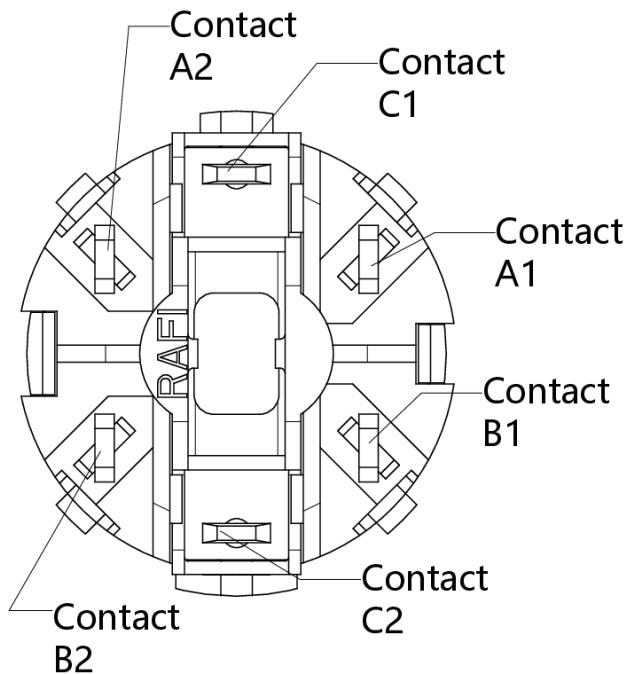
Actuating elements (such as pushbuttons, emergency stop actuators, etc.) have the intended tactility, reset and function only when assembled with the appropriate switching elements.

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 3/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
www.rafi-group.com,  
info.headquarters@rafi-group.com

**drawings****Connection drawing****Contact block with LED-Clip**

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 4/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
[www.rafi-group.com](http://www.rafi-group.com),  
[info.headquarters@rafi-group.com](mailto:info.headquarters@rafi-group.com)