

MICRO SWITCH



FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

ACTUATOR-SWITCH

CATALOG LISTING

8AS153

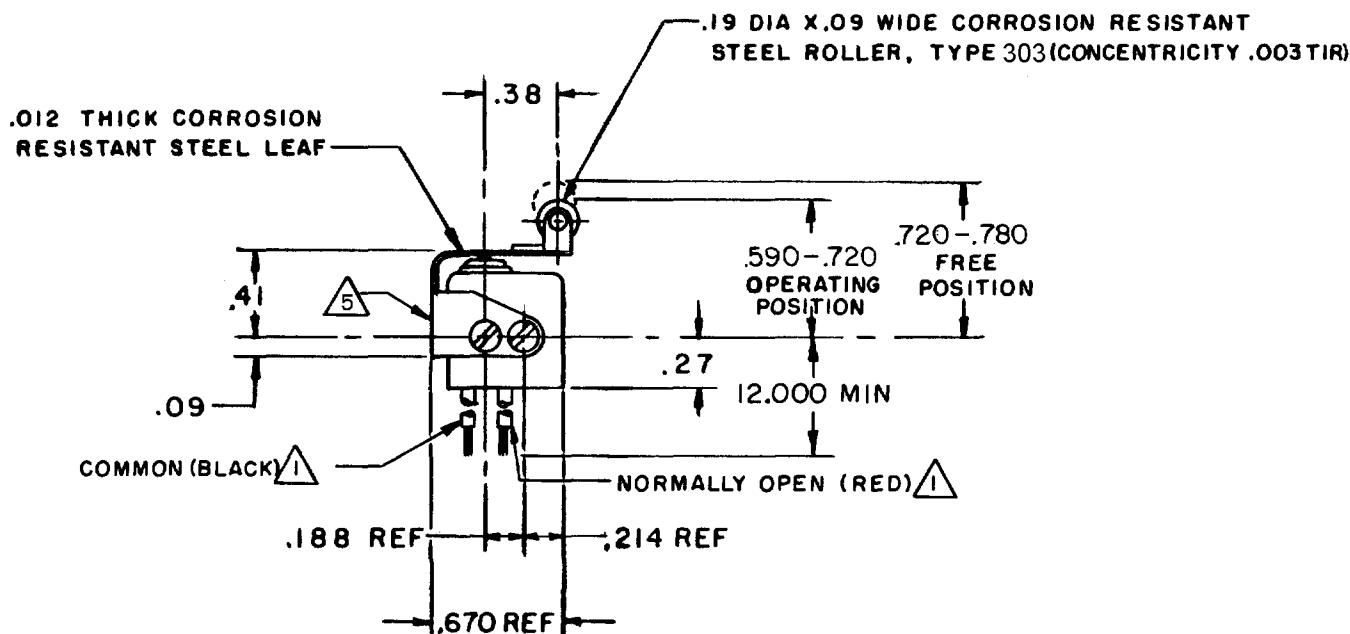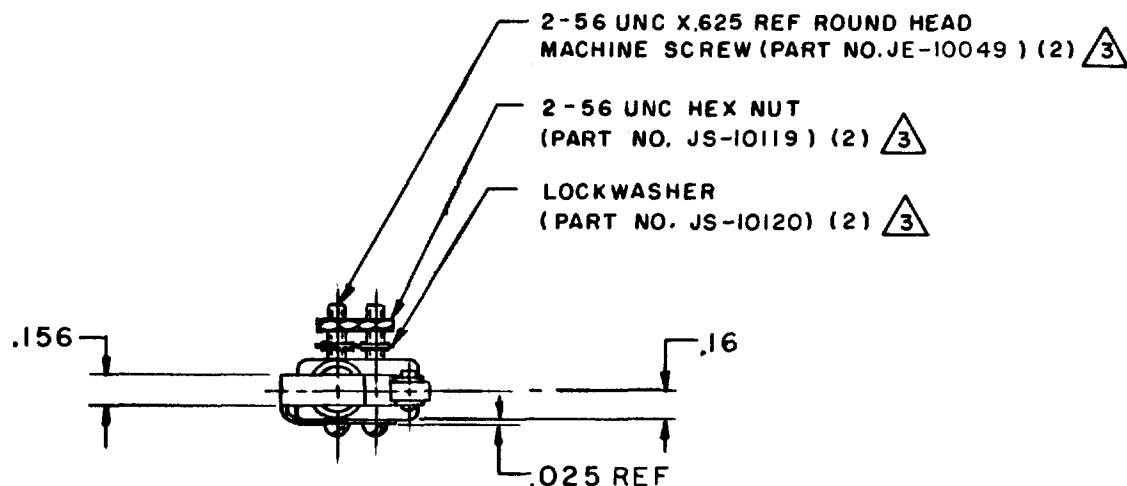

NOTE -

- $\Delta 1$ - (2) NO. 22 WIRE LEAD PER MIL-W-22759/11 EMBEDDED IN EPOXY CASTING RESIN
- 2 - UNIT INCLUDES CATALOG LISTING 14XE12 BASIC SWITCH
- $\Delta 3$ - CORROSION RESISTANT STEEL HARDWARE
- 4 - SLIGHT ROTATION BETWEEN BASIC AND ACTUATOR MAY BE NECESSARY TO OBTAIN OPERATING POSITION
- $\Delta 5$ - CATALOG LISTING PERMANENT MARKED ON ACTUATOR

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — — 21 OZ MAX	CONTACT ARRANGEMENT S P N O	DO NOT SCALE PRINT
RELEASE FORCE — — — — 2 OZ MIN		UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL — — — .018 MAX		DIMENSIONS ARE IN INCHES
OVERTRAVEL — — — — .009 MIN		TOLERANCES ARE:
		ONE PLACE (.0) $\pm .030$
		TWO PLACE (.00) $\pm .015$
		THREE PLACE (.000) $\pm .005$
		ANGLES $\pm .005$
		WEIGHT

8AS153

M

DRAWING
NUMBER

9

ISSUE

REPLACES

PR-729

14SEP05

RJ

CHECK

21 JUN 67

21 JUN 67

3 AUG 67

PR-729

24 MAY 69

CO26025

13 JUN 69

CO28538

1 FEB 71

CO33008

KPK

7 JAN 74

CO-84678

CSL

21 APR 97

H 0015428

SPK

14SEP05

FORMTEK

DRAWN

CHECK

21 JUN 67

LS D

21 JUN 67