

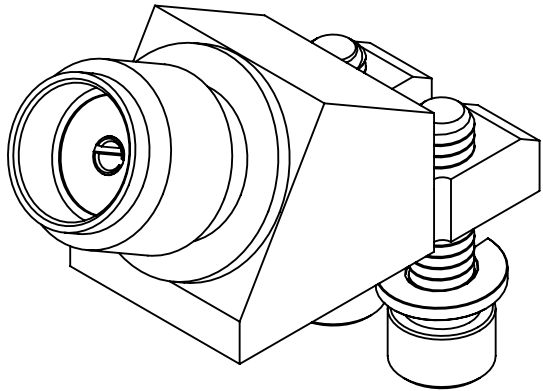


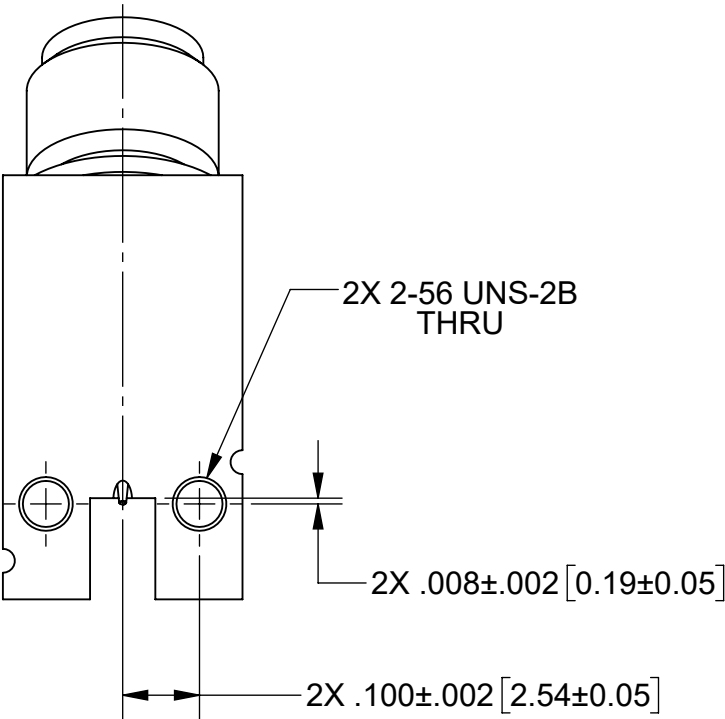

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 48241	04/24	SEE PDM

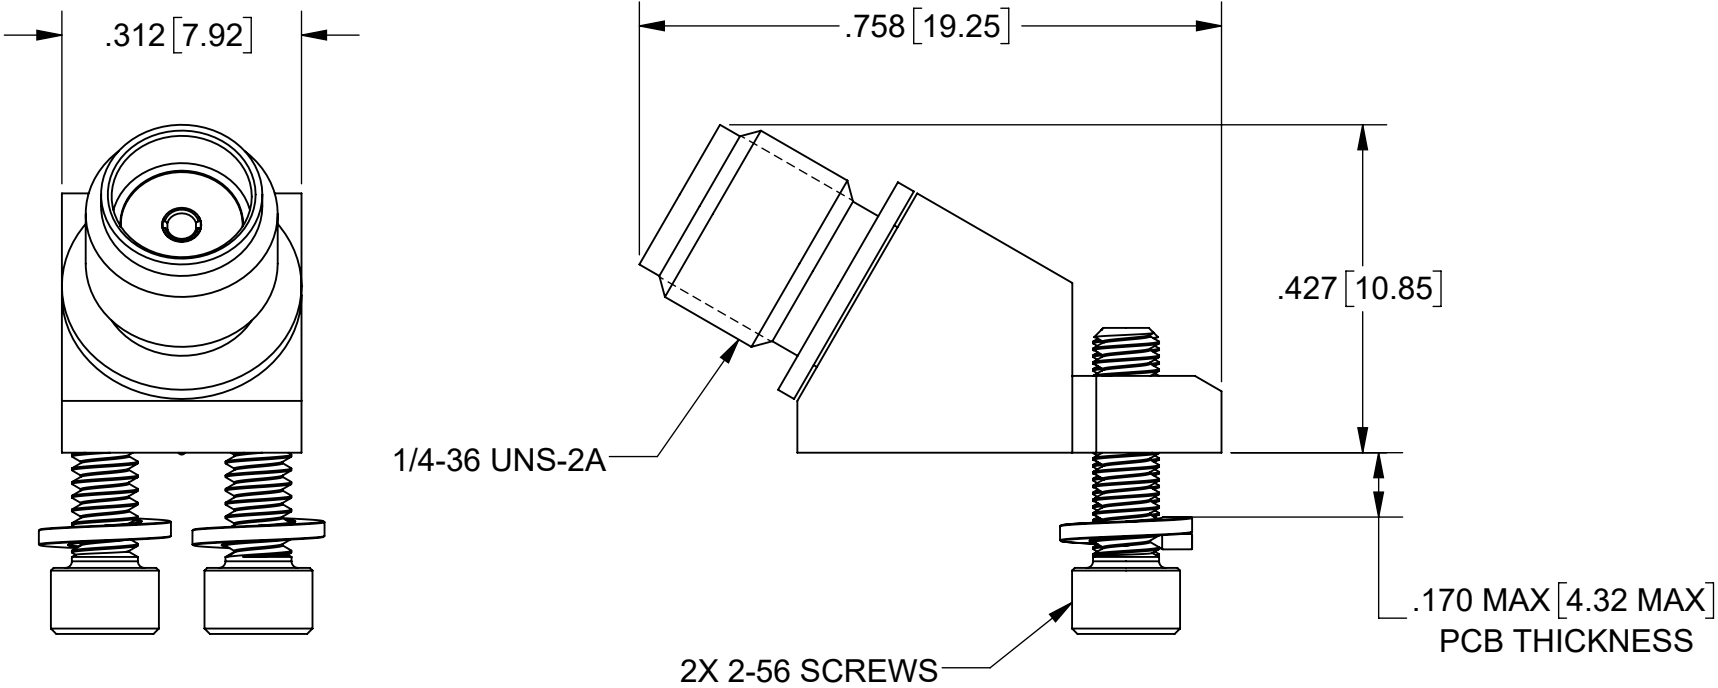

- MATERIAL:

BODIES:

CONTACT:

INSULATOR:

STAINLESS STEEL PER AMS 5640,
ALLOY UNS S30300, TYPE 1
OR ASTM A582 TYPE 303, CONDITION A.

BERYLLIUM COPPER PER ASTM B196,
ALLOY No. UNS C17300, TD04.

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B
- FINISH:

BODIES:

CONTACT:

PASSIVATED PER AMS 2700

GOLD PER ASTM B488, TYPE II,
CODE C, CLASS 1.27, OVER NICKEL
PER AMS 2404, CLASS 4, .00005" MIN.

PERFORMANCE:

- IMPEDANCE:

FREQ. RANGE:
- 50 OHMS

DC TO 18.0 GHz.

NOTES:
1. FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT SV MICROWAVE AT applications@svmicro.com

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--