

AC Crossaxial Blower

OAB60 series


Impeller: Aluminum Alloy Motor: AC Shaded pole Insulation Class: E.B.F

Insulation Withstand: AC 1500V/1 minute Insulation Resistance: >100M ohm DC500V

Operating Temp: 0C ~ +45C

Bearing: *
Indicate "B" for Ball bearing or "S" for Sleeve



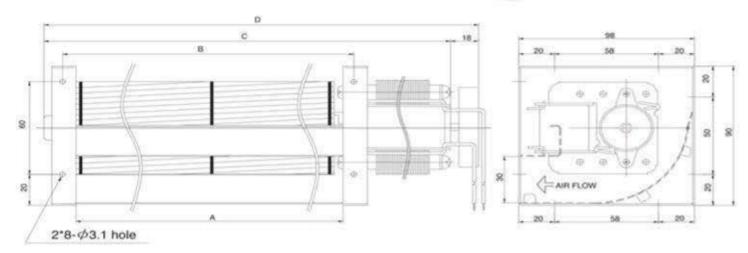

Spec. Model	Size (mm)				Rated	Rated	Rated	Input	Speed	Max	Maximun	**************************************	Noise	Safety Approval		Weight
	A	8	С	D	Voltage	Frequency	Current	Power W	r.p.m.	Pressure	Air Flow m³/min	CFM	dBA	UL	CE	9
OAB60184-11-2 * OAB60184-22-2 *	184	199	257		120	60	0.33	23	1700	3.8	1.8	63	35		0	1200
					230	50	0.17	23	2000	3.7	2.5	88	39		0	
OAB60184-11-1 * OAB60184-22-1 *	184	199	262	280	120	60	0.55	37	2500	7.3	3.0	106	47	0	0	1350
					230	50	0.27	34	2500	5.4	3.0	106	47	0	0	
OAB60245-11-2 * OAB60245-22-2 *	245	260	323		120	60	0.42	31	1900	4.9	2.9	102	41		0	1400
					230	50	0.23	31	2000	3.9	3.3	118	42		0	
DAB60245-11-1 *	245	260	323	341	120	60	0.60	42	2000	5.1	3.0	106	42	0	0	1500
OAB60245-22-1 *	245				230	50	0.27	35	2200	4.6	3.8	133	44	0	0	
OAB60306-11-1 * OAB60306-22-1 *	306	321	384	402	120	60	0.63	42	1900	4.7	3.2	114	42	0	0	1500
					230	50	0.28	36	2200	4.6	4.4	154	44	0	0	
OAB60368-11-1 * OAB60368-22-1 *	368	383	446	464	120	60	0.64	43	1700	3.0	3.8	133	41	0	0	1600
					230	50	0.30	38	2000	4.2	4.7	167	43	0	0	
OAB60429-11-1 * OAB60429-22-1 *	429	444	507	525	120	60	0.64	44	1600	2.2	3.9	139	41	0	0	1650
					230	50	0.31	40	1800	3.3	5.1	180	43	0	0	

