


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK7747

DATE	REV	REVISION RECORD	APP	DR	CK
7-11-06	NC	ECO 26342		ME	

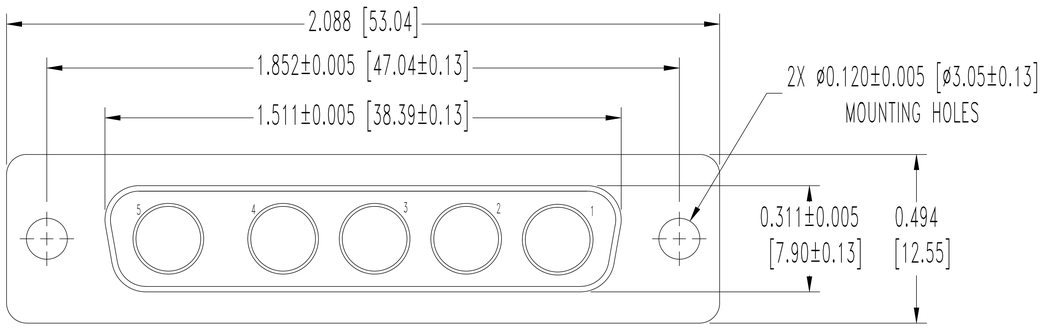

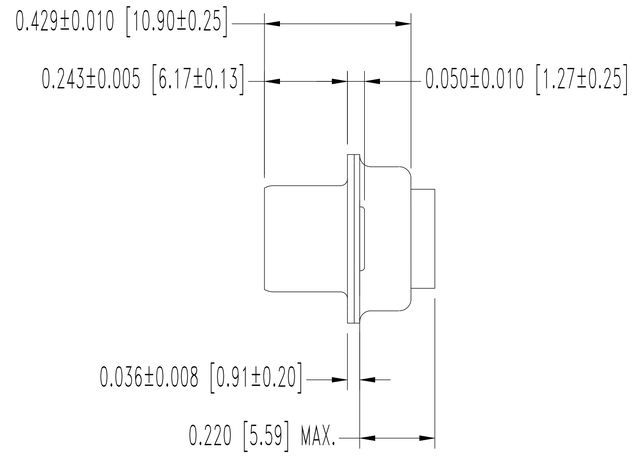

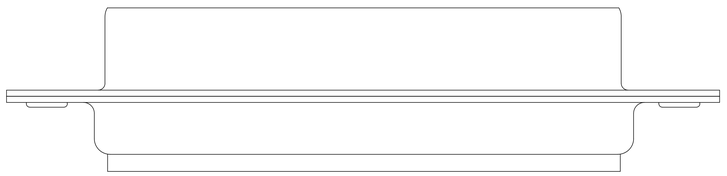

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL94V-0, BLUE COLOR.
   SHELLS: STEEL, ZINC PLATE DICHROMATE SEAL.
2. ELECTRICAL CHARACTERISTICS:
   INSULATOR RESISTANCE: 5 G OHMS.
   WORKING VOLTAGE: 300 V r.m.s.
3. TEMPERATURE RANGE: -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ±0.015 [0.38]
ANGULAR TOL. ±5°

CBD SERIES

SCALE N.T.S.

DRAWN BY M. ENEA
APPROVED BY

TITLE
CBD5W5F00000

DATE 7-11-06
DRAWING NUMBER SK7747
REV. NC

Downloaded from Arrow.com.