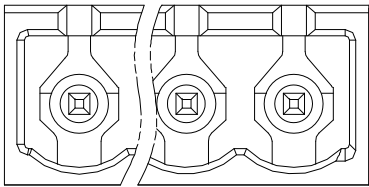
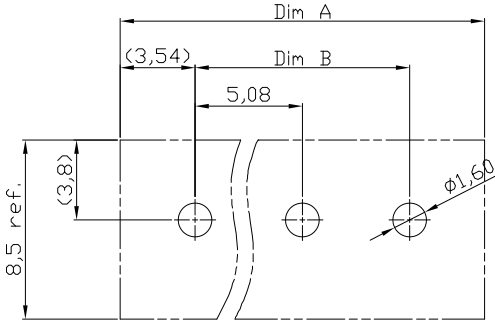
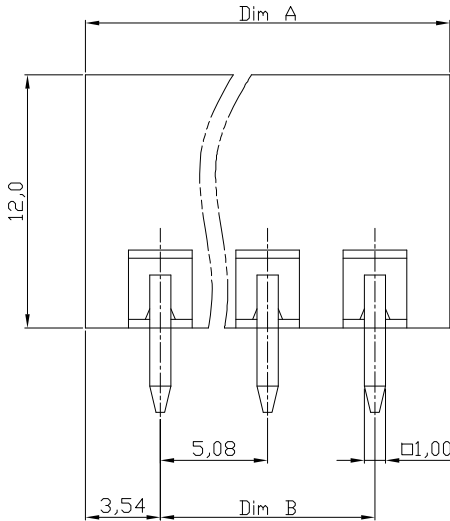
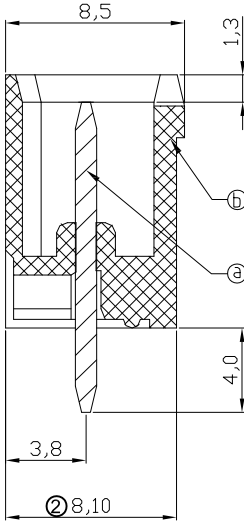


	1	2	3	4	5	6	7																																																																																
A	  Recommended PCB Layout   Material Item a Male contact pin: Copper Tin plated Item b Terminal(housing): Thermoplastic (UL94V-0) Green(RAL6018/T) Electrical cULus/VDE/TUV Voltage rating: 300V/300V/300V Current rating: 20A/20A/20A Withstanding Voltage: 1.6KV/2.5KV/2.5KV Operating temperature: -40°C to +115°C Soldering temperature: 260°C±5°C / 5 Sec Safety Approval:  ② Dimension <table><tr><td>DIM A</td><td>Nx5.08+2</td></tr><tr><td>DIM B</td><td>(N-1)x5.08</td></tr></table> N=Number of poles <table><tr><td>Poles</td><td>Tolerance</td></tr><tr><td>2P-6P</td><td>±0.15</td></tr><tr><td>7P-12P</td><td>±0.20</td></tr><tr><td>13P-18P</td><td>±0.30</td></tr><tr><td>19P-24P</td><td>±0.40</td></tr></table>							DIM A	Nx5.08+2	DIM B	(N-1)x5.08	Poles	Tolerance	2P-6P	±0.15	7P-12P	±0.20	13P-18P	±0.30	19P-24P	±0.40	A																																																																	
DIM A								Nx5.08+2																																																																															
DIM B								(N-1)x5.08																																																																															
Poles								Tolerance																																																																															
2P-6P								±0.15																																																																															
7P-12P								±0.20																																																																															
13P-18P	±0.30																																																																																						
19P-24P	±0.40																																																																																						
B	B																																																																																						
C	C																																																																																						
D	D																																																																																						
E	E																																																																																						
F	F																																																																																						
G	RoHS compliant Unit: mm <table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>04.05.2009</td><td>Dean</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td>Approved</td><td>09.01.2015</td><td>Amy</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>②</td><td>Update</td><td>09.01.2015</td><td>Amy</td><td colspan="3" rowspan="2"></td></tr><tr><td></td><td></td><td>①</td><td>Drawn</td><td>04.05.2009</td><td>Dean</td><td>Drawing-No.</td><td>ASS 3502 CO</td><td>rev02</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td colspan="3" rowspan="2">Replace</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Sheet</td></tr></table>							Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	04.05.2009	Dean	X.	±0.50					Approved	09.01.2015	Amy	X.X	±0.30								X.XX	±0.10								DIM	TOL	②	Update	09.01.2015	Amy						①	Drawn	04.05.2009	Dean	Drawing-No.	ASS 3502 CO	rev02	X.°	±1°					Replace			Angle	TOL	Id.	Modification	Date	Name	Sheet	G
Scale	Free					Date	Name	Customer-No.																																																																															
TOLERANCE						Drawn	04.05.2009	Dean																																																																															
X.	±0.50					Approved	09.01.2015	Amy																																																																															
X.X	±0.30																																																																																						
X.XX	±0.10																																																																																						
DIM	TOL	②	Update	09.01.2015	Amy																																																																																		
		①	Drawn	04.05.2009	Dean				Drawing-No.	ASS 3502 CO	rev02																																																																												
X.°	±1°					Replace																																																																																	
Angle	TOL	Id.	Modification	Date	Name				Sheet																																																																														
H								H																																																																															
	1	2	3	4	5	6	7	SV1482																																																																															