


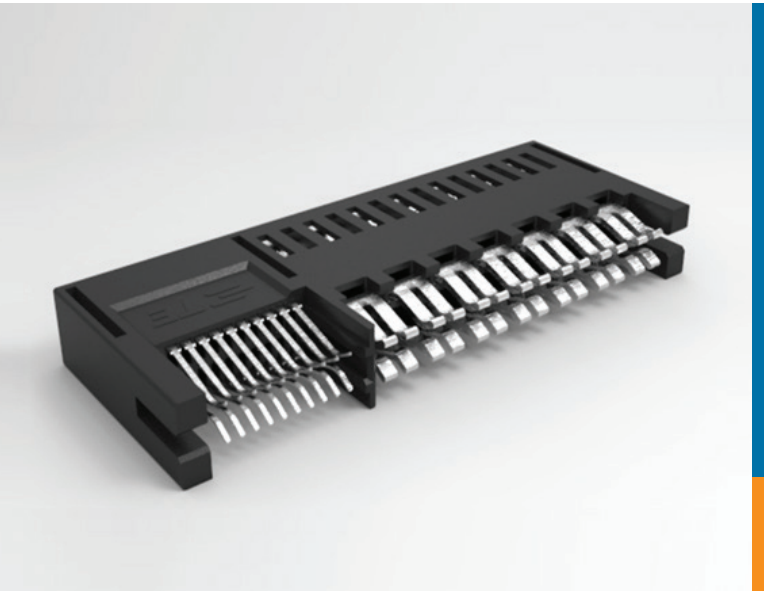

HIGH DENSITY CARD EDGE POWER CONNECTOR

While current density and power requirements are increasing, TE Connectivity (TE) has developed a new high density (HD) card edge connector that provides higher current at 25A per contact with low resistance and supports 1500-2000W power supply for data center equipment.

With a maximum operating temperature of 130°C, this connector provides reliable performance in harsh environments. The signal pitch is 1.27mm, which is compatible with common industry PCB footprint designs. The elasticity of the power/signal pins provides lower mating force.

Key Applications:

- Servers
- Switches
- Storage Devices

High Density Card Edge Power Connector

Extend the life of your power supply unit with one of the highest current density power connectors in the market.

High Current Density

- 1.27mm signal contact pitch, 5.08mm power contact pitch
- Power contact current: 25A (average)
- Working voltage: 100V

Low Contact Resistance

- 0.4 mΩ average
- Provides lower temperature rise and lower power loss on the connector

Common PCB Footprint


- Compact and cost-effective design with common power and signal contact module
- Flexible configuration with different contact quantities and positions
- Better scalability (AC & DC, low power & high power)

Reliable Performance

- Excellent mechanical and electrical performance
- Easy mating/un-mating with proper retention force
- Mating force 40N max with nominal mating PCB

Part Number Information

PART NUMBER	DESCRIPTION
2204798-1	High Density Card Edge Power Connector

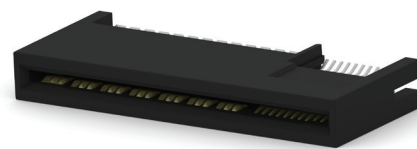

Key Features

- Max. current density: 250A/in
- Width: 7.25mm
- PCB thickness: 1.57mm
- Current: 25A avg. (-12A/2.54mm)
- Max. resistance: 1.0 milliohm
- Avg. resistance: 0.4 milliohm
- Mating force: 6N/contact

Specifications

- Product spec: 108-128053
- Qualification test report: 501-128055
- Application spec: 114-128056

For More Information

TE Technical Support Center

USA:	1.800.522.6752
Canada:	1.905.475.6222
Mexico:	52.0.55.1106.0800
Latin/S. America:	54.0.11.4733.2200
Germany:	49.0.6251.133.1999
UK:	44.0.800.267666
France:	33.0.1.3420.8686
Netherlands:	31.0.73.6246.999
China:	86.0.400.820.6015

© 2018 TE Connectivity Ltd. family of companies. All Rights Reserved.

TE Connectivity, TE and TE Connectivity (logo) are trademarks.

All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

1-1773943-9 01/18 DND