Overview

KEMET's C700 encapsulated radial leaded ceramic disc capacitors are specifically designed for interference-suppression AC line filtering applications. Having internationally recognized safety certifications, these capacitors are well-suited for applications that require keeping potentially disruptive or damaging line transients and EMI out of susceptible equipment. They are also an ideal solution when needing to suppress line disturbances at the source.

Safety Certified Capacitors are classified as either X and/or Y capacitors. Class X capacitors are primarily used in line-to-line (across-the-line) applications. In this application, there is no danger of electric shock to humans should the capacitor fail, but could result in a risk of fire. The class Y capacitor is primarily used in line-to-ground (line by-pass) applications. In this application, failure of the capacitor could lead to danger of electric shock.

With a working voltage of 440/400 VAC in line-to-line (Class X) and 300/250 VAC in line-to-ground (Class Y) applications, these safety capacitors meet the impulse test criteria outlined in IEC Standard 60384. Meeting subclass X1 and Y2 requirements, these devices are certified to withstand impulses up to 4 KV (X1) and 5 KV (Y2) respectively. These encapsulated devices also meet the flame test requirements outlined in UL Standard 94 V-0.

Benefits

- Safety standard recognized (IEC 60384-14)
- Reliable operation up to 125°C
- Class X1 440/400 VAC/Y2 300/250 VAC
- 5.0 mm, 7.5 mm, 10 mm, and 12.5mm lead spacing
- Lead(Pb)-free and RoHS Compliant
- Halogen-free
- Capacitance offerings ranging from 100 pF up to 10 nF
- Available capacitance tolerances of ±5%, ±10%, and ±20%
- High-reliability
- Preformed (crimped) or straight lead configurations
- Non-polar device, minimizing installation concerns
- Encapsulation meets flammability standard UL 94 V-0

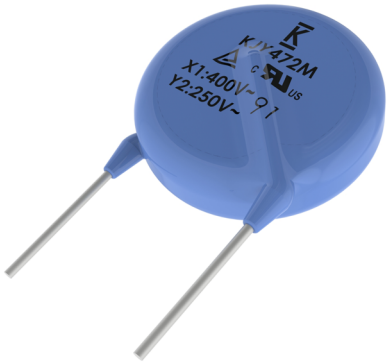

Applications

Typical applications include:
- Line-to-line (Class X) filtering
- Line-to-ground (Class Y) filtering
- Antenna coupling
- Primary and secondary coupling (switching power supplies)
- Line disturbances suppression (motors and motor controls, relays, switching power supplies and invertors)

Downloaded from Arrow.com.

Ordering Information

C7	8	1	U	103	M	Y	V	D	A	A	7301
Ceramic Series	Body Diameter	Lead Spacing[1,2,3]	Spec.	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage	Dielectric/ Temp. Char.	Design	Lead Configuration[1,3]	Failure Rate	Packaging (C-Spec)
C7 = Ceramic 700	0 = 7.0 mm 1 = 8.0 mm 2 = 9.0 mm 3 = 10.0 mm 4 = 11.0 mm 5 = 12.0mm 6 = 13.0 mm 7 = 14.0 mm 8 = 15.0 mm 9 = 16.0 mm	5 = 5.0 mm 7 = 7.5 mm 1 = 10.0 mm 2 = 12.5 mm	U = Safety	Two significant digits and Number of zeroes	K = ±10% M = ±20%	Y = X1 400 VAC/ Y2 250 VAC Z = X1 440 VAC/ Y2 300 VAC	S = SL Y = Y5P W = Y5U V = Y5V	D = Disc	A = Straight B = Vertical Kink C = Outside Kink D = Inside Kink	A = N/A	See "Packaging C-Spec Ordering Options Table" below

[1] *Due to a high risk of arcing, "Inside Kink" lead configuration cannot be combined with the 5 mm lead spacing option. The "Inside Kink" option is only available on capacitors with lead spacing of 7.5 mm or greater. A potential for arcing may exist when combining the "Inside Kink" lead configuration with a 7.5 mm lead spacing option, especially in high humidity environments and/or when exposure to voltages and transients may impact creepage and clearance requirements.*

[2] *Capacitor body diameter will limit available lead spacing and packaging options. See "Dimensions" and "Product Ordering Codes and Ratings" sections of this document to determine availability.*

[3] *Bulk packaging lead length availability is dependent upon "Lead Configuration" and "Lead Spacing." See "Dimensions" section of this document to verify availability of a specific lead length option. For nonstandard lead length inquiries, please contact KEMET.*

Packaging C-Spec Ordering Options Table

Packaging Type	Lead Length (mm)[2,3]	Packaging Ordering Code (C-Spec)
Reel	See Note 2	7301
Ammo Pack		7317
Bulk Bag	3.5 ±1.0	WL35
	5.0 ±1.0	WL50
	25.0 mm Minimum	WL25

[1] *For nonstandard lead length inquiries, please contact KEMET.*

[2] *Lead length for ammo and reel pack packaging is defined by the H and H0 dimensions in Table 3.*

Downloaded from Arrow.com.

Lead Configurations

Straight	Vertical Kink	Outside Kink	Inside Kink[1]
			

[1] *Due to a high risk of arcing, the "Inside Kink" lead configuration option cannot be combined with 5 mm lead spacing ("S" dimension above). The "Inside Kink" option is only available on devices with lead spacing of 7.5 mm, 10 mm, or 12.5 mm.*

Dimensions – Millimeters

Lead Configuration	Lead Configuration Ordering Code[1]	S Lead Spacing[2]	Lead Spacing Tolerance	D Body Diameter[2]	T Body Thickness	V Width	F Lead Diameter
Straight	A	5.0	±1.0	See Table 1 - "Product Ordering Codes and Ratings"		2.1 ± 0.5	0.60 ±0.1
		7.5					
		10.0					
		12.5					
Vertical Kink (Preformed)	B	5.0					
		7.5					
		10.0					
		12.5					
Outside Kink (Preformed)	C	5.0					
		7.5					
		10.0					
		12.5					
Inside Kink (Preformed)	D	7.5					
		10.0					
		12.5					

[1] *Lead Configuration is identified in the 13th character of the ordering code. See "Lead Configuration" and "Ordering Information" sections of this document for further details.*
[2] *Body diameter of capacitor will limit available lead spacing and packaging options. See "Product Ordering Codes and Ratings" sections of this document for further details.*

Downloaded from Arrow.com.

Approval Standard and Certification No.

Safety Standard	Standard No.	Subclass	Working Voltage	Certificate No.
TUV	IEC 60384-14	X1	400 VAC	R50466992
		Y2	250 VAC	
TUV	IEC 60384-14	X1	440 VAC	R50466992
		Y2	300 VAC	
UL CAN/CSA	UL 60384-14 and E60384-14	X1	400 VAC	E356389
		Y2	250 VAC	
UL CAN/CSA	UL 60384-14 and E60384-14	X1	440 VAC	E356389
		Y2	300 VAC	

These devices are TUV and UL recognized for antenna coupling and AC line-to-line (Class X) and line-to-ground (Class Y) applications per IEC60384-14 and UL 60384-14.

Environmental Compliance

These devices are Halogen-free and RoHS Compliant. They meet all requirements set forth by both EU and China RoHS directives.

Downloaded from Arrow.com.

Table 1A – X1 400 Y2 250 Product Ordering Codes and Ratings

Dielectric/ Temp. Char.	KEMET Part Number	Capacitance	Capacitance Tolerance	Dimensions (mm)			Lead Spacing
				Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	
Y5P	C71(1)U101KYYD(2)A(3)	100 pF	±10%	8.0	5.0	0.60 ± 0.1	10.0 mm ± 1.0 12.5 mm ± 1.0
	C71(1)U151KYYD(2)A(3)	150 pF					
	C71(1)U181KYYD(2)A(3)	180 pF					
	C71(1)U221KYYD(2)A(3)	220 pF					
	C71(1)U331KYYD(2)A(3)	330 pF					
	C71(1)U471KYYD(2)A(3)	470 pF					
	C72(1)U561KYYD(2)A(3)	560 pF		9.0			
	C72(1)U681KYYD(2)A(3)	680 pF					
	C73(1)U102KYYD(2)A(3)	1000 pF		10.0			
Y5U	C71(1)U102MYWD(2)A(3)	1000 pF	±20%	8.0			
	C72(1)U152MYWD(2)A(3)	1500 pF		9.0			
	C73(1)U222MYWD(2)A(3)	2200 pF		10.0			
	C74(1)U252MYWD(2)A(3)	2500 pF		11.0			
	C75(1)U332MYWD(2)A(3)	3300 pF		12.0			
	C76(1)U392MYWD(2)A(3)	3900 pF		13.0			
	C77(1)U472MYWD(2)A(3)	4700 pF		14.0			
Y5V	C71(1)U102MYVD(2)A(3)	1000 pF	±20%	8.0			
	C71(1)U152MYVD(2)A(3)	1500 pF					
	C72(1)U222MYVD(2)A(3)	2200 pF		9.0			
	C73(1)U252MYVD(2)A(3)	2500 pF		10.0			
	C73(1)U332MYVD(2)A(3)	3300 pF					
	C74(1)U392MYVD(2)A(3)	3900 pF		11.0			
	C75(1)U472MYVD(2)A(3)	4700 pF		12.0			
	C76(1)U502MYVD(2)A(3)	5000 pF		13.5			
	C77(1)U562MYVD(2)A(3)	5600 pF		14.0			
	C78(1)U682MYVD(2)A(3)	6800 pF		15.0			
	C79(1)U103MYVD(2)A(3)	10000 pF		16.0			
Dielectric/ Temp. Char.	**KEMET Part Number**	**Capacitance**	**Capacitance Tolerance**	**Body Diameter (Maximum)**	**Body Thickness (Maximum)**	**Lead Diameter**	**Lead Spacing**

(1) To properly complete ordering code, insert the one-digit numeric code to reflect required lead spacing: (Note that select capacitance values and packaging options may limit lead spacing availability. See table above to verify availability.)
5 = 5.0 mm
7 = 7.5mm
1 = 10.0 mm
2 = 12.5 mm
(2) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)
A = Straight
B = Vertical Kink
C = Outside Kink
D = Inside Kink
(3) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.

Downloaded from Arrow.com.

Table 1B – X1 440 Y2 300 Product Ordering Codes and Ratings

Dielectric/ Temp. Char.	KEMET Part Number	Capacitance	Capacitance Tolerance	Dimensions (mm)			Lead Spacing
				Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	
Y5P	C71(1)U101KZYD(2)A(3)	100 pF	±10%	8.0	5.0	0.60 ± 0.1	10.0 mm ± 1.0 12.5 mm ± 1.0
	C71(1)U151KZYD(2)A(3)	150 pF					
	C71(1)U181KZYD(2)A(3)	180 pF					
	C71(1)U221KZYD(2)A(3)	220 pF					
	C71(1)U331KZYD(2)A(3)	330 pF					
	C71(1)U471KZYD(2)A(3)	470 pF					
	C72(1)U561KZYD(2)A(3)	560 pF		9.0			
	C72(1)U681KZYD(2)A(3)	680 pF					
	C73(1)U102KZYD(2)A(3)	1000 pF		10.0			
Y5U	C71(1)U102MZWD(2)A(3)	1000 pF	±20%	8.0			
	C72(1)U152MZWD(2)A(3)	1500 pF		9.0			
	C73(1)U222MZWD(2)A(3)	2200 pF		10.0			
	C74(1)U252MZWD(2)A(3)	2500 pF		11.0			
	C75(1)U332MZWD(2)A(3)	3300 pF		12.0			
	C76(1)U392MZWD(2)A(3)	3900 pF		13.0			
	C77(1)U472MZWD(2)A(3)	4700 pF		14.0			
Y5V	C71(1)U102MZVD(2)A(3)	1000 pF	±20%	8.0			
	C71(1)U152MZVD(2)A(3)	1500 pF					
	C72(1)U222MZVD(2)A(3)	2200 pF		9.0			
	C73(1)U252MZVD(2)A(3)	2500 pF		10.0			
	C73(1)U332MZVD(2)A(3)	3300 pF					
	C74(1)U392MZVD(2)A(3)	3900 pF		11.0			
	C75(1)U472MZVD(2)A(3)	4700 pF		12.0			
	C76(1)U502MZVD(2)A(3)	5000 pF		13.5			
	C77(1)U562MZVD(2)A(3)	5600 pF		14.0			
	C78(1)U682MZVD(2)A(3)	6800 pF		15.0			
	C79(1)U103MZVD(2)A(3)	10000 pF		16.0			
Dielectric/ Temp. Char.	**KEMET Part Number**	**Capacitance**	**Capacitance Tolerance**	**Body Diameter (Maximum)**	**Body Thickness (Maximum)**	**Lead Diameter**	**Lead Spacing**

(1) To properly complete ordering code, insert the one-digit numeric code to reflect required lead spacing: (Note that select capacitance values and packaging options may limit lead spacing availability. See table above to verify availability.)
7 = 7.5mm
1 = 10.0 mm
2 = 12.5 mm
(2) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)
A = Straight
B = Vertical Kink
C = Outside Kink
D = Inside Kink
(3) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.

Downloaded from Arrow.com.

Table 2 – Performance & Reliability: Test Methods and Conditions

Item		Specification	Test Method
Operating Temperature Range		−55°C to +125°C	
Dielectric Strength	Between lead wires	No failures	The capacitor shall not be damaged when 2,600 VAC (rms) is applied between the lead wires for 60 seconds.
	Body Insulation	No failures	The terminals (leads) of the capacitor shall be connected together. A metal foil is tightly wrapped around the body of the capacitor at a distance of about 3 to 4 mm from each terminal. The capacitor is then inserted into a container filled with metal balls approximately 1 mm in diameter. 2,600 VAC (rms) is applied for 60 seconds between the capacitor lead wires and metal balls. (charge/discharge current ≤ 50 mA). 
Insulation Resistance (IR)		10,000 MΩ minimum	The insulation resistance shall be measured with 500 ±50 VDC applied after 60 ±5 seconds of charging.
Capacitance		Within specified tolerance	
Dissipation Factor (DF) or Q		Temperature Characteristics / Specification: Y5P: DF ≤ 2.5% Y5U/Y5V: DF ≤ 5.0% SL: Q ≥ 300	Characteristic / Frequency / Voltage: SL: 1 MHz ±20%, 5.0 V_{rms} Maximum Y5P /Y5U/Y5V: 1 kHz ±20%, 5.0 V_{rms} Maximum The measurement at reference temperature 25°C
Temperature Characteristics		Temperature Characteristics / Capacitance Change: Y5P: Within ±10% Y5U: Within +22%/−56% Y5V: Within +22%/−82% SL: +350~1,000%	A capacitance measurement is made at each step specified: Step / Temperature: 1: +25 ±2°C 2: Minimum operating temperature 3: +25 ±2°C 4: Maximum operating temperature 5: +25 ±2°C **Pretreatment:** Capacitor is stored at 85 ±2°C for 1 hour and then placed at room condition[1] for 24 ±2 hours before measurement.
Terminal Strength	Tensile	Lead wire or capacitor body shall not break.	With the termination in its normal position, the specimen is held by its body in such a manner that the axis of the termination is vertical. A tensile force of 10 N is applied to the termination in the direction of its axis and acting in a direction away from the body of the specimen.
	Bending	Lead wire or capacitor body shall not break.	With the termination in its normal position, the specimen is held by its body in such a manner that the axis of the termination is vertical; a mass force of 5 N is then suspended from the end of the termination. The body of the specimen is then inclined within a period of 2 to 3 seconds, through an angle of approximately 90° in the vertical plane and then resumed to its initial position over the same period of time; this operation constitutes one bend. One bend immediately followed by a second bend in the opposite direction.

[1] *"Room Condition" is defined as follows: Temperature: 20 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.*

Downloaded from Arrow.com.

Table 2 – Performance & Reliability: Test Methods and Conditions cont.

Item		Specification	Test Method	
Soldering Effect (Non-Preheat)	Appearance	No visual defect	As shown in the figure below, the lead wires are immersed in molten solder up to 1.5 mm (+5/−0 mm) from the end of the epoxy meniscus (root of lead wire). Duration/Solder Temperature: 3.5 ±0.5 seconds/350°C ±10°C or 10 ±1 seconds/260°C ±5°C  **Pretreatment:** Capacitor is stored at 85°C ±2°C for 1 hour and then placed at room condition[1] for 24 ±2 hours before initial measurements. **Post-treatment:** Capacitor is stored for 1 to 2 hours at room condition[1].	
	IR	1,000 MΩ Minimum		
	Dielectric Strength	Per item 1		
	Capacitance	Within ±10% Y5P, Y5U and Y5V: within ±10% SL: within ±2.5% or ±0.25 pF, whichever is larger		
Biased Humidity	Appearance	No visual defect	Steady State Humidity:	Load Humidity:
	Capacitance	Temperature Characteristics / Capacitance Change Y5P: Within ±10% Y5U: Within ±15% Y5V: Within ±30% SL: Within ±5%	90 to 95% humidity at 40°C ±2°C for 500 ±12 hours. **Post-treatment:** Capacitor is stored for 1 to 2 hours at room condition[1].	90 to 95% humidity at 40°C ±2°C for 500 ±12 hours with full rated voltage applied. **Post-treatment:** Capacitor is stored for 1 to 2 hours at room condition[1].
	DF	Y5V and Y5U: 7.5% maximum Y5P: 5% maximum		
	Q	Q ≥ 135		
	IR	3,000 MΩ minimum		
	Dielectric Strength	No failures		
High Temperature Life	Appearance	No visual defect	Impulse Voltage: Each individual capacitor is subjected to three 5 kv impulses prior to life testing. 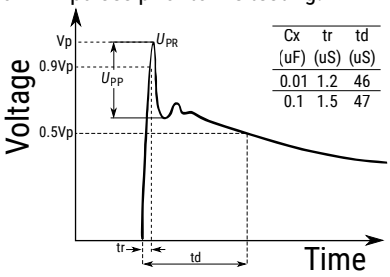 Capacitors are placed in a circulating air oven for a period of 1,000 hours. The air in the oven is maintained at a temperature of 125°C ±2 throughout the test. The capacitors are subjected to 170% of Rated Voltage. Each hour the voltage is increased to AC 1,000 V_{rms} for 0.1 seconds.	
	Capacitance Change	Y5P, Y5U within ±20% Y5V within ±30%		
	IR	3,000 MΩ minimum SL: 1,000 MΩ minimum		
	Dielectric Strength	No failures		

[1] *"Room Condition" is defined as follows: Temperature: 20 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.*

Downloaded from Arrow.com.

Table 2 – Performance & Reliability: Test Methods and Conditions cont.

<table>
<tr><th>Item</th><th>Specification</th><th>Test Method</th></tr>
<tr><td>Flame Test</td><td>The capacitor flame extinguishes as follows:
<table>
<tr><th>Cycle</th><th>Time</th></tr>
<tr><td>1 ~ 4</td><td>30 seconds maximum</td></tr>
<tr><td>5</td><td>60 seconds maximum</td></tr>
</table></td><td>The capacitor is exposed to a flame for 15 seconds and then removed for 15 seconds. This test is repeated for 5 cycles.

</td></tr>
<tr><td>Active Flammability</td><td>The cheesecloth should not ignite.</td><td>The capacitors are individually wrapped in at least one, but not more than two, complete layers of cheesecloth. They are then subjected to 20 discharges. The interval between successive discharges is 5 seconds. The VAC is maintained for 2 minutes after the last discharge.
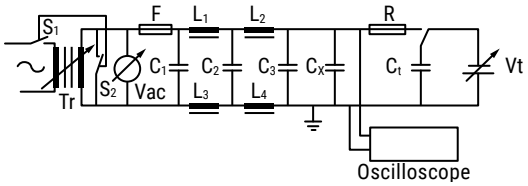

<table>
<tr><td>$C_{1,2}$</td><td>1 µF ±10%</td><td>C_3</td><td>0.033 µF ±5% 10 kV</td></tr>
<tr><td>$L_{1\text{-}10}$</td><td>1.5 mH ±20% 16 A Rod core choke</td><td>Cx</td><td>Test capacitor</td></tr>
<tr><td>R</td><td>100 ±2% Ω</td><td>V_{AC}</td><td>V_R ±5%</td></tr>
<tr><td>Ct</td><td>3 µF ±5% 10 kV</td><td>V_R</td><td>Rated Working Voltage</td></tr>
<tr><td>F</td><td>Fuse, Rated 10A</td><td>Vt</td><td>Voltage applied to Ct</td></tr>
</table>

</td></tr>
<tr><td rowspan="2">Passive Flammability</td><td rowspan="2">The burning time should not exceed 30 seconds.
The tissue paper should not ignite.</td><td>The capacitor under test is held into a flame and in a position which best promotes burning. Each specimen is exposed to the flame once.
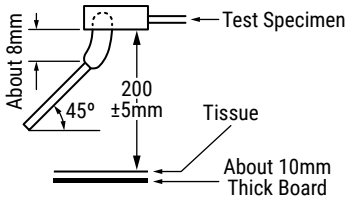
</td></tr>
<tr><td>Time of Exposure to Flame: 30 seconds
Length of Flame: 12 ±1 mm
Gas Burner Length: 35 mm minimum
Inside Diameter: 0.5 ±0.1 mm
Outside Diameter: 0.9 mm maximum
Gas Butane Gas Purity: 95% minimum</td></tr>
</table>

[1] *"Room Condition" is defined as follows: Temperature: 20 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.*

Downloaded from Arrow.com.

Soldering and Mounting Information

Soldering:
When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could reflow the solder joint between the lead and ceramic element and/or may result in thermal shocks that can crack the ceramic element.

When soldering these capacitors with a soldering iron, it should be performed under the following conditions:
- Temperature of iron-tip: 400°C maximum
- Soldering iron wattage: 50 W maximum
- Soldering time: 3.5 seconds maximum

Cleaning (ultrasonic cleaning):
To perform ultrasonic cleaning, observe the following conditions:
- Rinse bath capacity: output of 20 watts per liter or less
- Rinsing time: 5 minute maximum
- Do not vibrate the PCB/PWB directly
- Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires

Construction

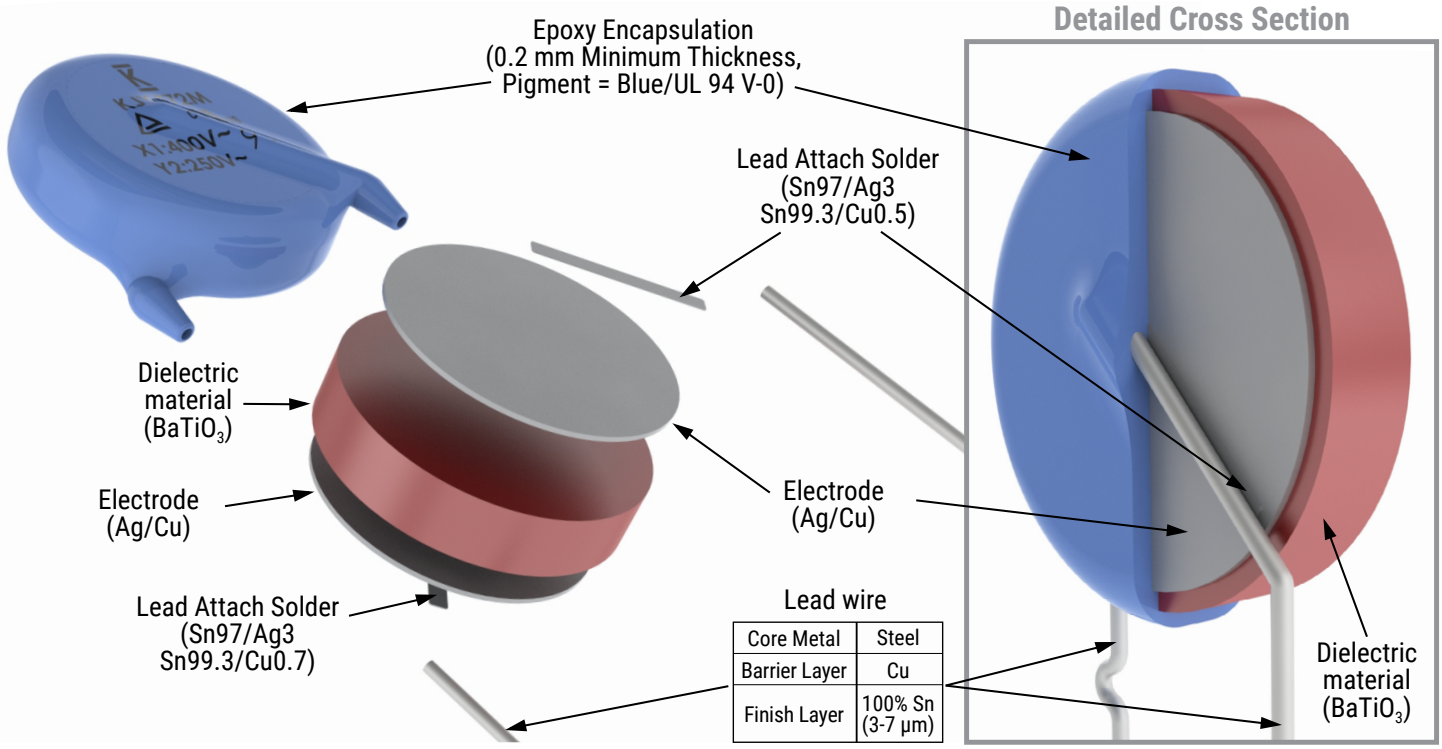

Downloaded from Arrow.com.

Marking

These capacitors shall be laser marked with KEMET's trademark, type designation, capacitor class, rated voltage, rated capacitance, and capacitance tolerance codes. In addition, all devices are marked with the recognized approval mark and a date/lot code for traceability. Marking will be supplied on one side of the encapsulated capacitor body. All marking shall be legible to allow for clear identification of the component. Marking appears in legible contrast. Illustrated below is an example of the marking format and content.

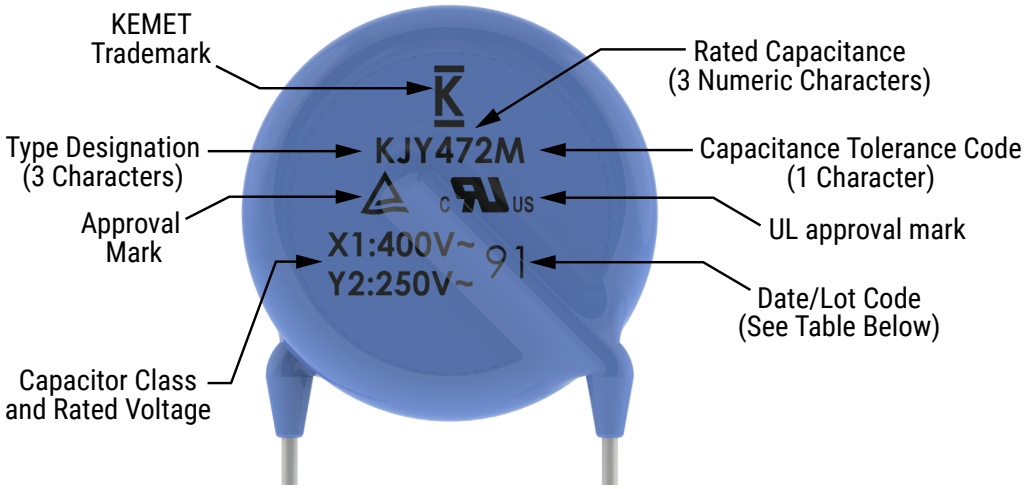

Date/Lot Code e.g., 9D (December 2019, Taiwan)

9	D	-
Last digit of year, e.g., 3 = 2013	Manufacturing Month: 1-9 = Jan - Sept O = October N = November D = December	Manufacturing Location Code (blank): Taiwan C: Dongguan

Downloaded from Arrow.com.

Packaging Quantities

Ammo Pack (7317)

Lead Spacing	Body Diameter (mm)	Pitch (Carrier Tape)	Ammo Pack (Pieces/Box)
5	≤12	12.7	1000
	13≤D≤14	25.4	1000
	≥15	25.4	750
7.5	≤12	12.7	1,000
	13≤D≤14	25.4	1000
	≥15	25.4	750
10[1]	≤12	25.4	1000
	>12	25.4	750
12.5	≤10	25.4	1000
	≥11	25.4	750

[1] For S (X1 440 VAC/ Y1 400 VAC) and W (X1 760 VAC/ Y1 500 VAC) voltage ratings:
If Body Diameter D = 12, then Ammo Pack (Pieces/Box) = 750

Reel (7301)

Lead Spacing	Body Diameter (mm)	Pitch (Carrier Tape)	Ammo Pack (Pieces/Box)
5	<10	12.7	2000
	10≤D≤12	25.4	1000
	13≤D≤14	25.4	750
	≥15	12.7	2000
7.5	≤12	25.4	1000
	13≤D≤14	12.7	2000
	≥15	12.7	2000
10	≤10	25.4	1000
	≥11	25.4	750
12.5	≤10	25.4	1000
	≥11	25.4	750

Bulk Bag (Loose)

Body Diameter (mm)	Lead Length (WL25)	Cut Lead Length (WL35, WL50, WL10)
7	200 Pieces/Bag	500 Pieces/Bag
8		
9		
10		
11		
12		
13		
14		
15		
16		

Downloaded from Arrow.com.

Figure 1 - Ammo/Reel Pack Taping Format

5 mm and 7.5 mm Lead Spacing:

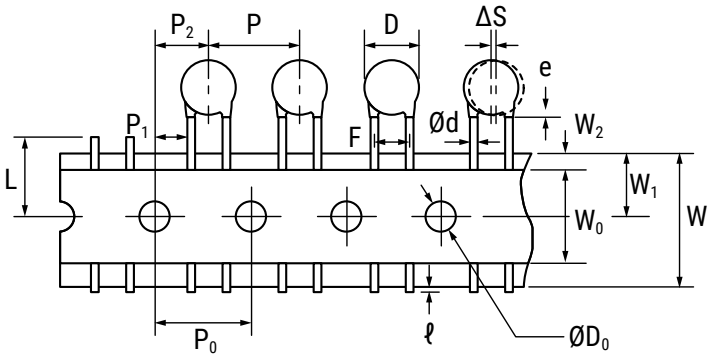

5 mm, 7.5 mm, 10 mm and 12.5 mm Lead Spacing:

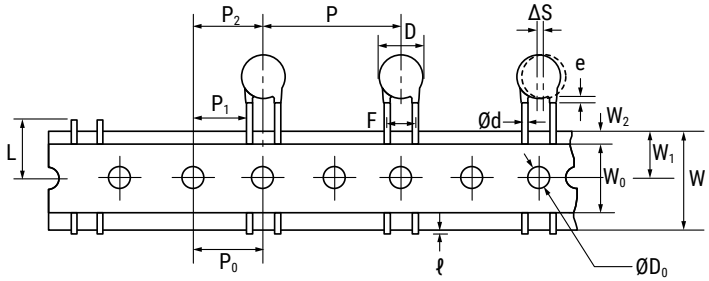

For All Lead Spacing:

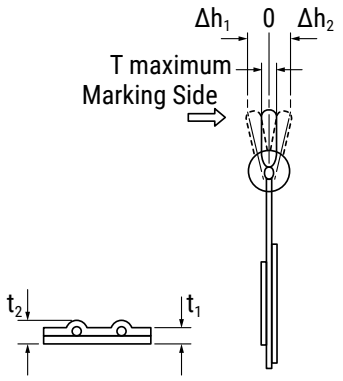



Table 3 – Ammo/Reel Pack Taping Specifications

Lead Spacing		5 mm				7.5 mm				10 mm		12.5 mm	
Lead Style		Straight		Preformed[1]		Straight		Preformed[1]		Straight	Preformed[1]	Straight	Preformed[1]
Item	Symbol	Dimensions (mm)											
Lead Spacing	F	5.0 ±1.0				7.5 ±1.0				10.0 ±1.0		12.5 ±1.0	
Component Pitch	P	12.7 ±1.0	25.4 ±2.0	12.7 ±1.0	25.4 ±2.0	12.7 ±1.0	25.4 ±2.0	12.7 ±1.0	25.4 ±2.0	25.4 ±2.0		25.4 ±2.0	
Sprocket Hole Pitch	P_0	12.7 ±0.3				12.7 ±0.3				12.7 ±0.3		12.7 ±0.3	
Sprocket Hole Center to Component Center	P_2	6.35 ±1.5	12.7 ±1.5	6.35 ±1.5	12.7 ±1.5	6.35 ±1.5	12.7 ±1.5	6.35 ±1.5	12.7 ±1.5	12.7 ±1.5		12.7 ±1.5	
Sprocket Hole Center to Lead Center	P_1	3.85 ±0.7	10.2 ±1.5	3.85 ±0.7	10.2 ±1.5	2.6 ±0.7	8.95 ±1.5	2.6 ±0.7	8.95 ±1.5	7.7 ±1.5		6.45 ±1.5	
Body Diameter	D	See "Product Ordering Codes and Ratings" section of this document.											
Component Alignment (side/side)	ΔS	0 ±2.0											
Carrier Tape Width	W	18.0 +1.0/−0.5											
Sprocket Hole Position	W_1	9.0 ±0.5											

[1] Preformed (crimped) lead configurations include vertical kink, outside kink, and inside kink. See "Lead Configurations" and "Ordering Information" sections of this document for further details.
[2] Also referred to as "lead length" in this document.

Downloaded from Arrow.com.

Table 3 – Ammo Pack Taping Specifications cont.

Lead Spacing		5 mm		7.5 mm		10 mm		12.5 mm	
Lead Style		Straight	Preformed[1]	Straight	Preformed[1]	Straight	Preformed[1]	Straight	Preformed[1]
Item	Symbol	Dimensions (mm)							
Height to Seating Plane[2] (preformed leads[1])	H_0	N/A	16.0 +2.0/-0	N/A	16.0 +2.0/-0	N/A	16.0 +2.0/-0	N/A	16.0 +2.0/-0
Height to SeatingPlane[2] (straight leads)	H	20.0 +1.5/-1.0	N/A	20.0 +1.5/-1.0	N/A	20.0 +1.5/-1.0	N/A	20.0 +1.5/-1.0	N/A
Lead Protrusion	ℓ	2.0 maximum							
Diameter of Sprocket Hole	D_0	4.0 ±0.2							
Lead Diameter	φd	0.6 ±0.1							
Carrier Tape Thickness	t_1	0.6 ±0.3							
Total Thickness (Carrier Tape, Hold-Down Tape and Lead)	t_2	1.5 maximum							
Component Alignment (front/back)	Δh_1	2.0 maximum							
	Δh_2								
Cut Out Length	L	11.0 maximum							
Hold-Down Tape Width	W_0	10.0 minimum							
Hold-Down Tape Position	W_2	3.0 maximum							
Coating Extension on Leads (meniscus)	e	3.0 maximum for straight lead; not to exceed the bend for preformed1 lead configurations.							
Body Thickness	T	8.0 maximum							

[1] *Prefromed (crimped) lead configurations include vertical kink and outside kink. See "Lead Configurations" and "Ordering Information" sections of this document for further details.*
[2] *Also referred to as "lead length" in this document.*

Application Notes:

Storage and Operating Conditions:
The Insulating coating of these devices does not form an air and moisture tight seal. Avoid exposure to moisture and do not use or store these devices in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. Before cleaning, bonding or molding these devices, it is important to verify that your process does not affect product quality and performance. KEMET recommends testing and evaluating the performance of a cleaned, bonded or molded product prior to implementing and/or qualifying any of these processes. Store the capacitors where the temperature and relative humidity do not exceed 40 degrees centigrade and 70% respectively. For optimum solderability, capacitor stock should be used promptly, preferably within 24 months of receipt.

Working Voltage:
Application voltage (Vp-p or Vo-p) must not exceed the voltage rating of the capacitor. Irregular voltages can be generated for a transient period of time when voltage is initially applied and/or removed from a circuit. It is important to choose a capacitor with a voltage rating greater than or equal to these irregular voltages.

Downloaded from Arrow.com.

Application Notes (cont.):

Voltage	DC Voltage	DC+AC Voltage	AC Voltage	Pulse Voltage (1)	Pulse Voltage (2)
Positional Measurement					

Operating Temperature and Self-Generating Heat:
The surface temperature of a capacitor should be kept below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency current, pulse current or similar current, it may produce self-generated heat due to dielectric loss. Temperature rise due to self-generated heating should not exceed 20°C (while operated at an atmosphere temperature of 25°C).

Handling - Vibration and Impact:
Do not expose these devices or their leads to excessive shock or vibration during use.

FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND CAUSE FUMING OR PARTIAL DISPERSION WHEN THE PRODUCT IS USED.

Downloaded from Arrow.com.

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit https://www.yageogroup.com/SalesResources/SalesOffices

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product–related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

KEMET is a registered trademark of KEMET Electronics Corporation.

Downloaded from Arrow.com.