

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

WA-1RX-A41

WA-1RX-A41

M

DRAWING
NUMBER

ISSUE

10

REVISIONS

A	C080462	JALA	11 JUN 95
B	C082632	DLT	25 JUL 96
C	C084043	DLT	21 MAR 97
D	C093346	DLT	23 SEP 98

REPLACES

RELEASE NO. PR-315

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

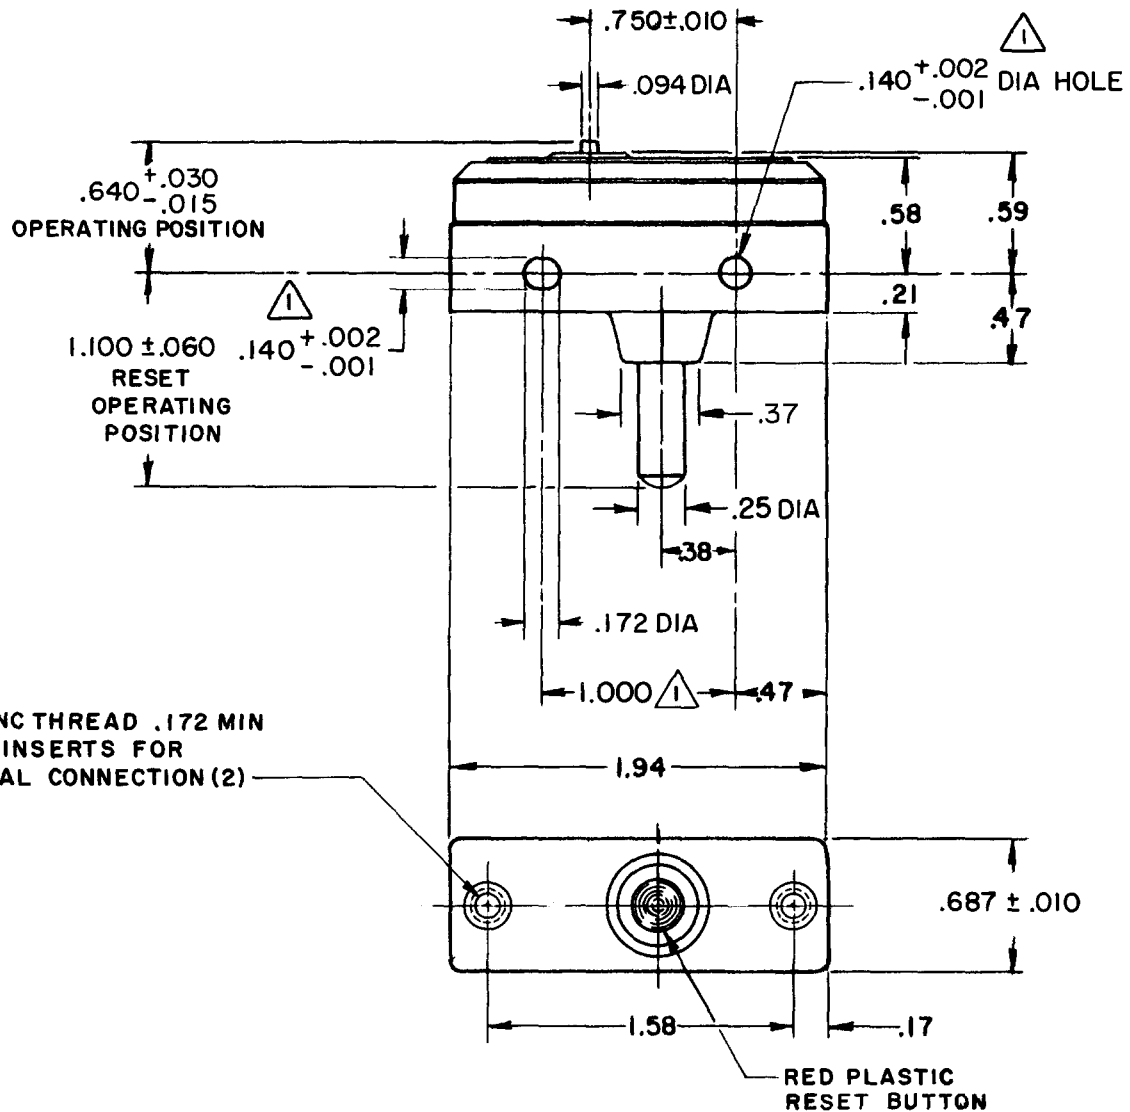

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
- 2 - CONTACT MATERIAL - FINE SILVER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 20 OZ MAX	CONTACT ARRANGEMENT SINGLE POLE NORM CLOSED MAINTAINED CONTACT	DO NOT SCALE PRINT
DIFFERENTIAL TRAVEL ----- .008 MAX (WITH RESET PLUNGER HELD FULLY DEPRESSED)	L178 20A 125, 250, 277 VAC 3/4HP 125 VAC, 1 1/2HP 250 VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
OVERTRAVEL ----- .010 MIN	L288 L299 L308	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES
RESET CHARACTERISTICS OPERATING FORCE ----- 25 OZ MAX	20(3)A 250V ~ T85 5E4	WEIGHT

FORMTEK

DRAWN

GFS 13 AUG 68