
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY					
	REV	DESCRIPTION	DATE	APPROVED	
	-	NRN 44672	03/20	BNK	
	Α	DCN 51145	10/21	BNK	

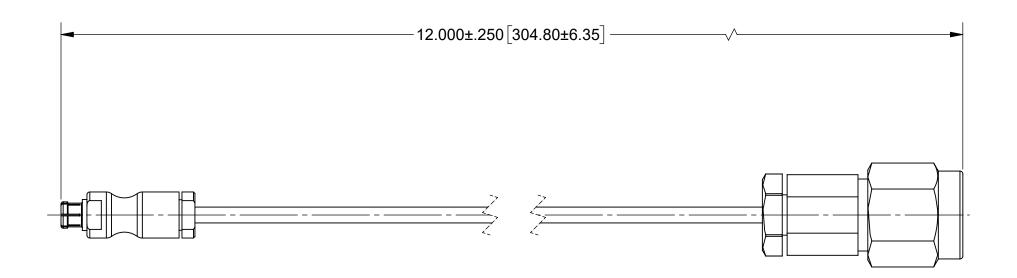

MATERIAL:

SMPM FEMALE (3221-40128) SMA MALE (SF2911-60966) CONNECTORS:

CABLE: SV ∅.047 SUPERFLEX CABLE (200-70-391)

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 26.5 GHz.

MATERIAL:	SEE NOTES				
FINISH:	SEE NOTES				
SURFACE AR	SURFACE AREA: N/A				
	PROPRIETARY				
IS THE SOLE F ANY REPRODI WITHOUT THE	TION CONTAINED IN THIS DRAWI PROPERTY OF SV MICROWAVE, II JCTION IN PART OR AS A WHOLE I WRITTEN PERMISSION OF IE, INC IS PROHIBITED.				

DIMENSIONS ARE IN INCHES TOLERANCES:				
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'				
DECIMAL: .X ±.030 .XX +.010				
.XXX ±.005				
INTERPRET DIMENSIONS AND TOLERANCES				
PER ASME Y14.5M - 1994				

FRACTIONAL: ±1/64 ANGULAR: X* ±1*0' DECIMAL: X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	JPM 03/19/20
	CHECKED:	BNK 03/19/20
	APPROVED:	BNK 03/19/20

UNLESS OTHERWISE SPECIFIED

MICROWAVE

SMPM STR. F TO SMA STR. M SUPERFLEX CABLE ASSEMBLY

SIZE DWG. NO. 7032-7777