APAMPSLJ-140

MSL level: Not Applicable


FEATURES:

- Passive Multiband Blade Antenna (699MHz ~ 2690MHz)
- Covering Cellular + 3G + 4G + Cellular + GPS & GLONASS + WiFi/Bluetooth + LTE 2.6GHz
- Internal Router Blade design
- Gain (3dBi) Typ
- VSWR 2:1 (GPS), 4:1 (2.5 ~ 2.6GHz), 5:1 2.5 ~ 2.69GHz
- Dimensions (171 x 38 x 13.8mm)
- Linear Polarization
- SMA Male connector
- RoHS/RoHS II compliant

STANDARD SPECIFICATIONS:

Parameters	Min.	Тур.	Max.	Units	Note
	1559		1606	MHz	GPS/GLONASS/Galileo
Receiving Frequency	699		960	MHz	4G/LTE
	1710		2690	MHz	4G/LTE
			2:1		GPS
VSWR			4:1		@ 699-2600MHz
			5:1		@ 2500-2690MHz
Polarization Model		Linear			
Impedance		50		Ω	
Gain		3.0		dBi	
Operating Temperature	-40		+85	°C	

MEASUREMENTS - 3D SPHERICAL

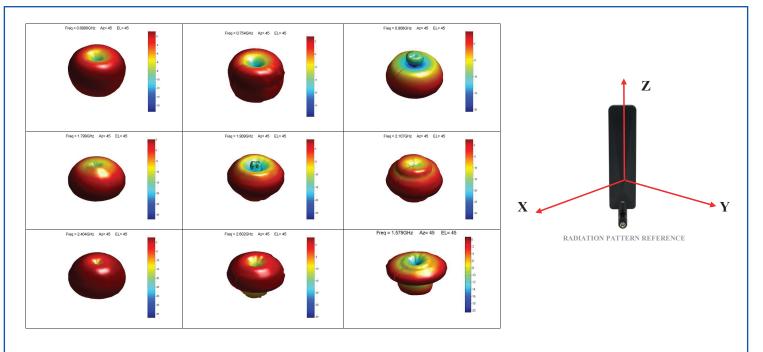





2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 06.11.15** Ph. 949.546.8000 | Fax. 949.546.8001 Visit www.abracon.com for Terms and Conditions of Sale



RoHS/RoHS II compliant

TYPICAL APPLICATIONS:

- Terminal Antenna for 2G / 3G / 4G and Cellular Gateways + WiFi.
- Wireless Routers
- LTE

Multiband Antenna Module

APAMPSLJ-140



RoHS/RoHS II compliant

▶ S11


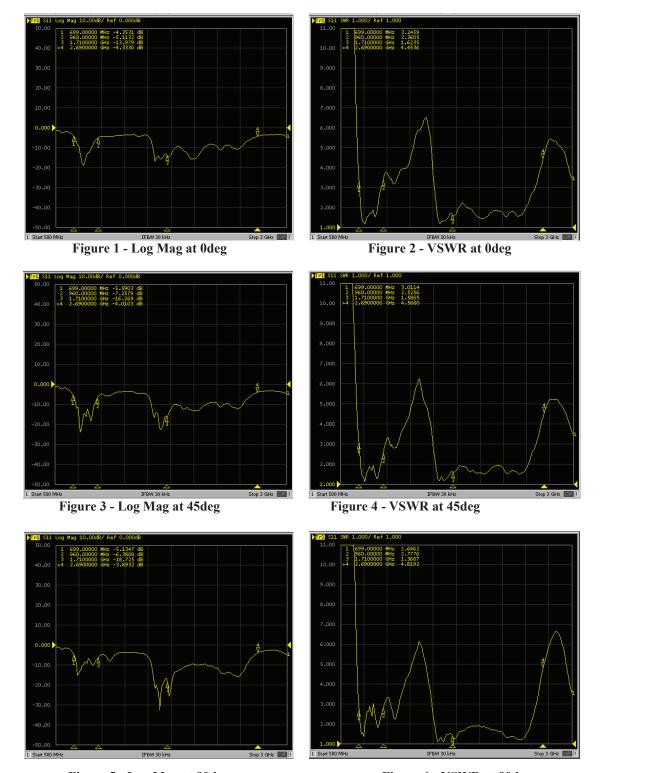


Figure 5 - Log Mag at 90deg







2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 06.11.15** Ph. 949.546.8000 | Fax. 949.546.8001 Visit www.abracon.com for Terms and Conditions of Sale

Multiband Antenna Module


APAMPSLJ-140




RoHS/RoHS II compliant






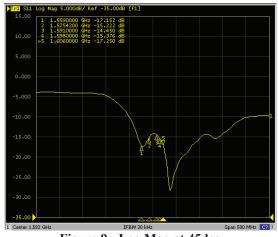







The Power of Linking Togeth

ABRACON IS

ISO9001:2008

CERTIFIED

.com.

Downloaded from

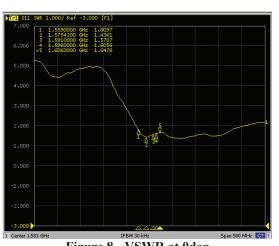


Figure 8 - VSWR at 0deg


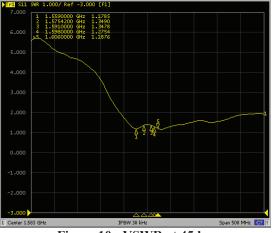


Figure 10 - VSWR at 45deg

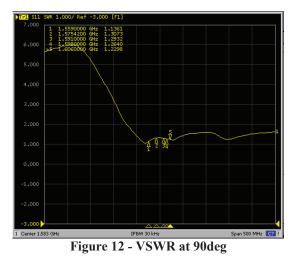


2 Faraday, Suite# B | Irvine | CA 92618 Revised: 06.11.15 Ph. 949.546.8000 Fax. 949.546.8001 Visit www.abracon.com for Terms and Conditions of Sale

APAMPSLJ-140


196.0 X 38.0 X 13.8mm

RoHS/RoHS II compliant

EFFICIENCY

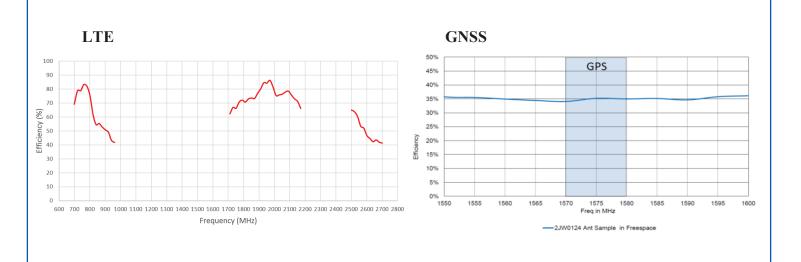

OUTLINE DIMENSION:

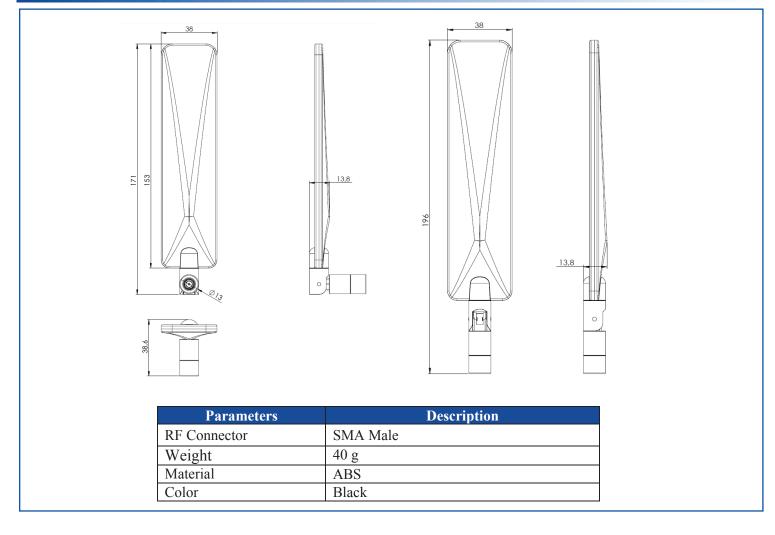

ABRACON IS ISO9001:2008 CERTIFIED Downloaded from Arrow.com.



2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 06.11.15** Ph. 949.546.8000 | Fax. 949.546.8001 Visit **www.abracon.com** for Terms and Conditions of Sale

APAMPSLJ-140

PRODUCT IMAGE:



RoHS/RoHS II compliant



▷ PACKAGING:

Each antenna is individually packaged in a poly bag. 200pcs is the suggested quantity per 465 x 310 x 250mm box.



CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS ISO9001:2008 CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 06.11.15** Ph. 949.546.8000 | Fax. 949.546.8001 Visit **www.abracon.com** for Terms and Conditions of Sale