

MICRO SWITCH

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING

4CE8

4CE8

M

DRAWING
NUMBER

10

ISSUE

REPLACES

RELEASE NO. PR-8621

CHECK

09APR07

KSR

15 NOV 85

CHECK

16 MAY 80

C E B

CHECK


16 MAY 80

DRAWN




GJW

REVISIONS

A	PR-8621
G J W	16 MAY 80
B	CO-53016
K A G	23 JUN 83
C	CO-58411
C J H	15 NOV 85
D	204537
S A V	14 DEC 01
E	0029513
M S T	09APR07
F	ECO-0045107
V K S	06 NOV 08

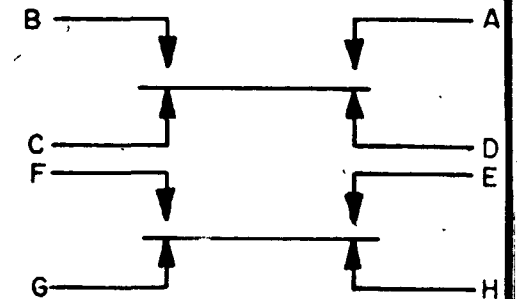


CIRCUIT DIAGRAM

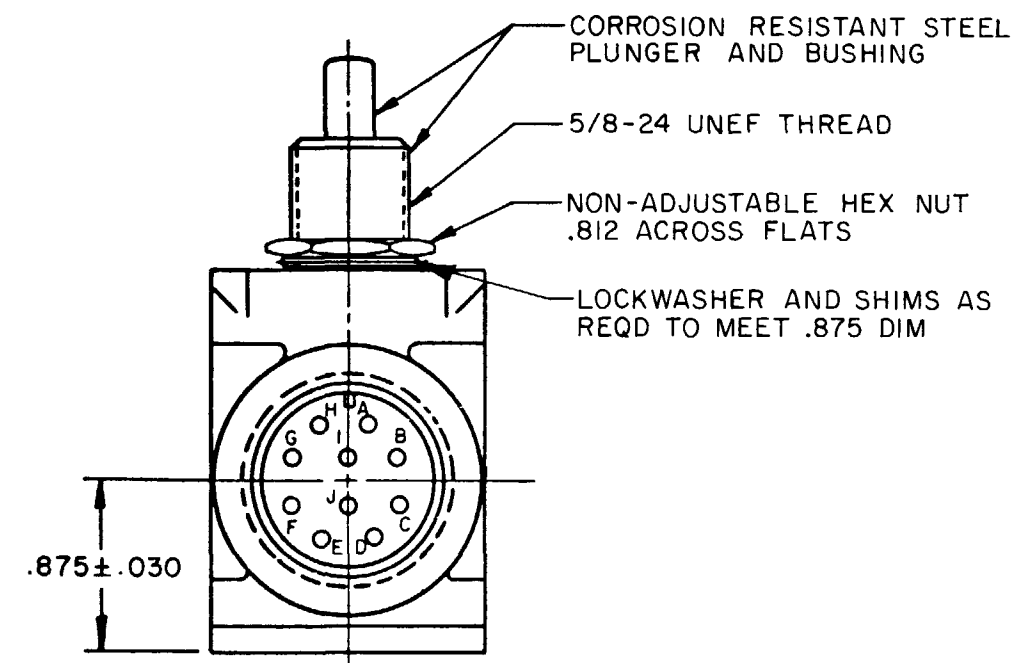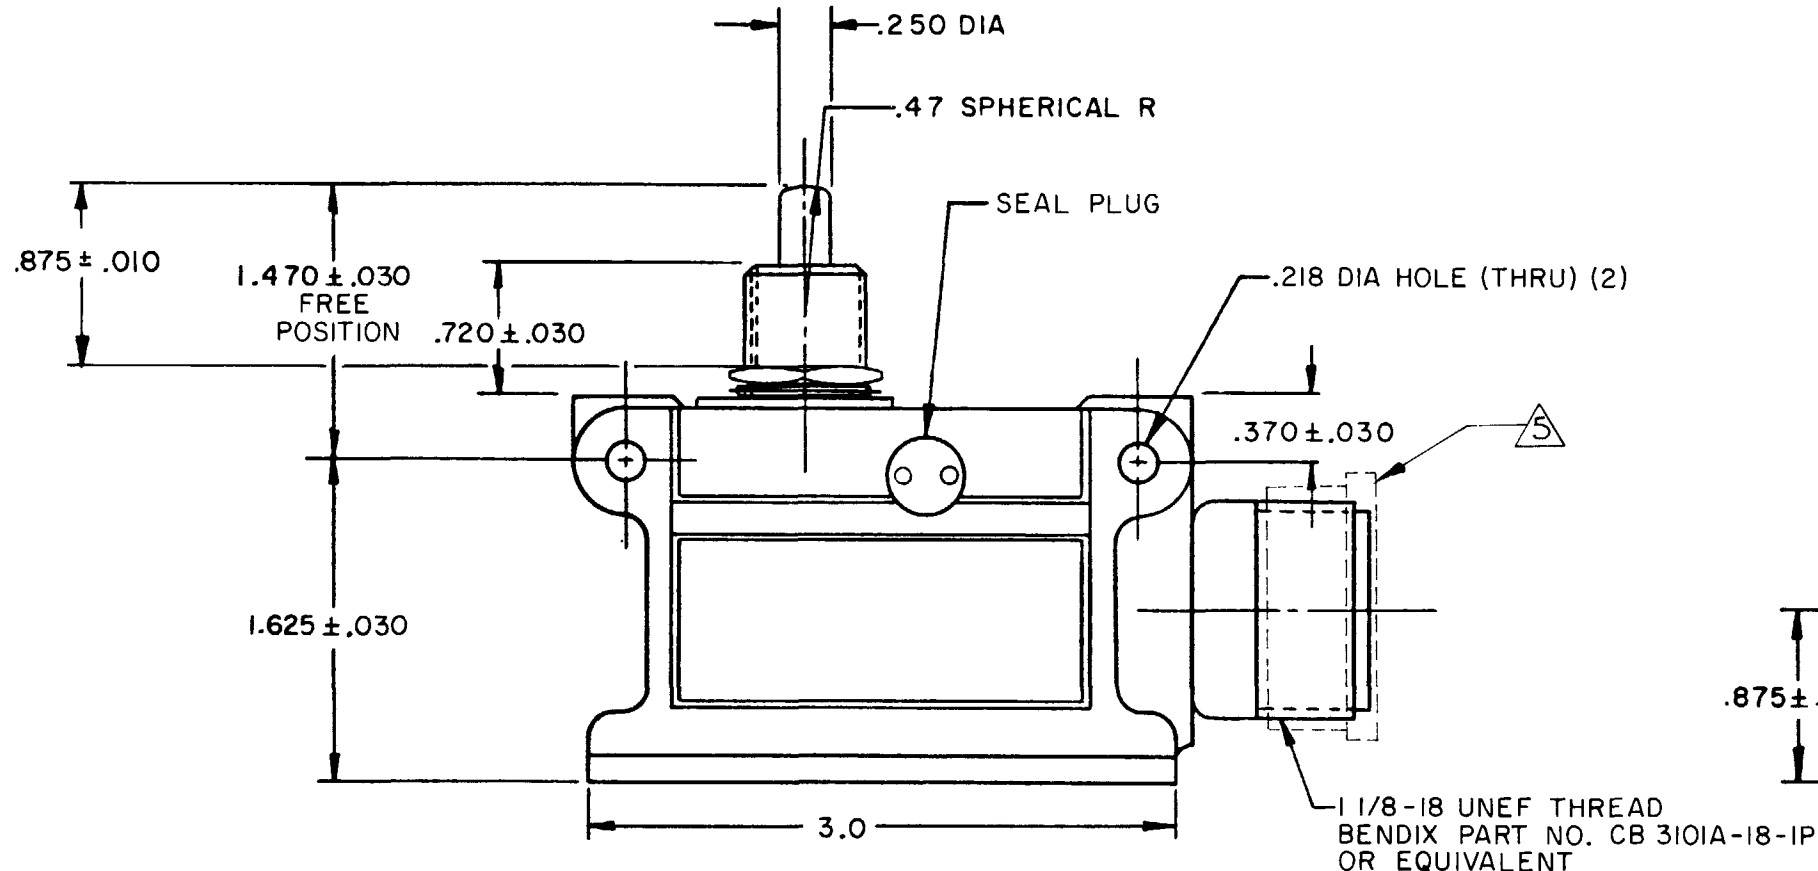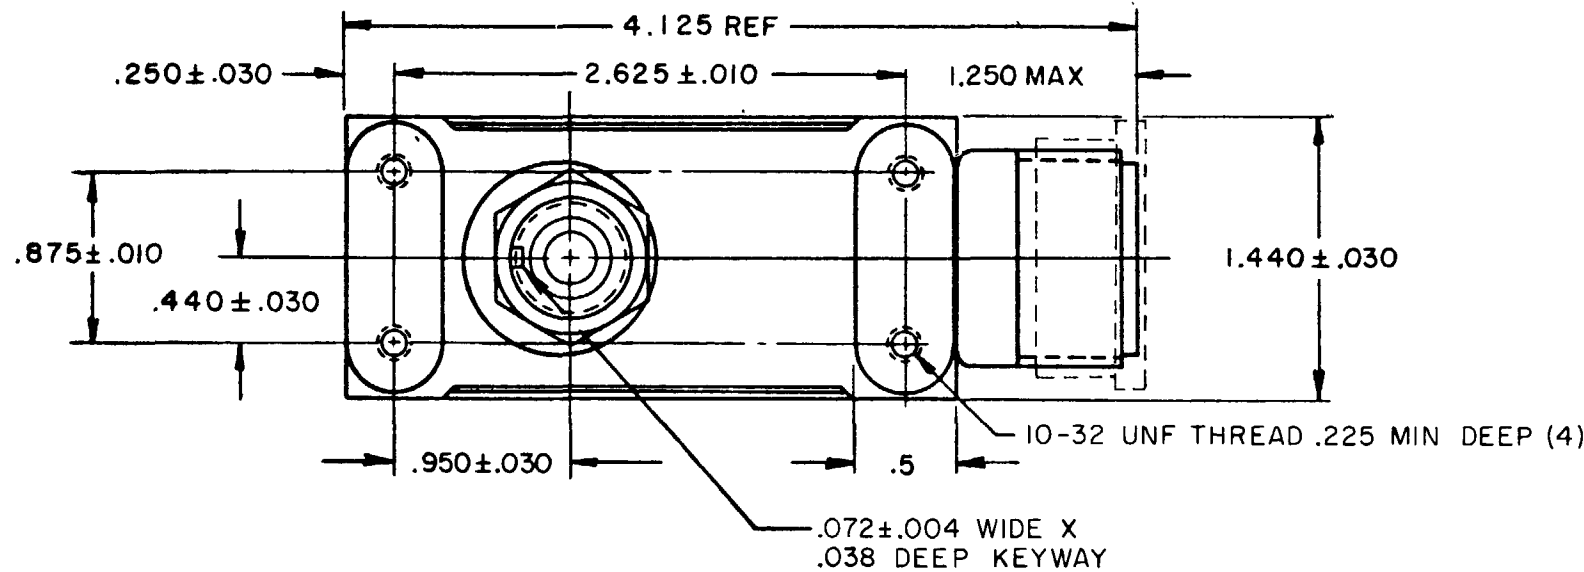

RASTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±			
DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES			
ONE PLACE	X	1/64	0.015
TWO PLACES	X, X	0.001	0.001
THREE PLACES	X, X, X	0.0005	0.0005
ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS		DESIGN UNITS	
RAW MATERIAL-COMMERCIAL STANDARD		RAW MATERIAL-COMMERCIAL STANDARD	
MICRO SWITCH STANDARDS APPLY		MICRO SWITCH STANDARDS APPLY	
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED	
WEIGHT		WEIGHT	
12.5 OZ MAX		12.5 OZ MAX	

NOTES

- 1 ALUMINUM ALLOY ENCLOSURE ANODIZED, IMPREGNATED AND FINISHED WITH ONE COAT OF PRIMER
- 2 CIRCUIT IDENTIFICATION SHOWN ON HOUSING.
- 3 SHOCKPROOF PER MIL-S-901 GRADE 1, TYPE C, LIGHT-WEIGHT EQUIPMENT WITH NO PHYSICAL DAMAGE
- 4 WATERTIGHT PER MIL-STD-108, TABLE III, METHOD C, AT 1.3 PSI FOR 2 HOURS WHEN USED WITH MATING RECEPTACLE MS3106E-18-1S OR EQUIVALENT



FURNISHED WITH SNUG FITTING PLASTIC DUST CAP