


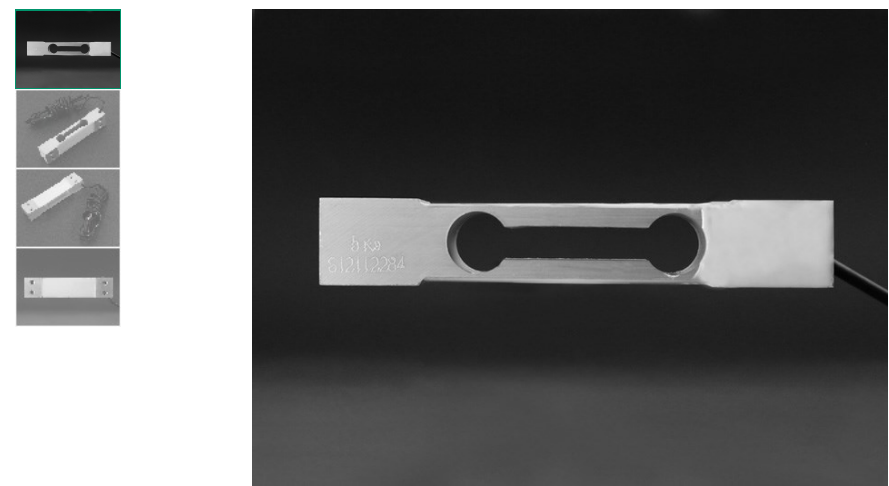

Weight Sensor (Load Cell) 0-5kg

SKU 114990094     

IN STOCK 4 Available

- 1 +

ADD TO CART

- Description
- Best-sellers
- Technical Details
- Questions and Answers
- View History


Description


Introduction :

Applicable to electronic scale, price computing scale, electronic platform scale, digital scale; parcel post scale, electronic balance and all varieties of commercial scales by single load cell.

Specification:

- Capacity: 5KG
- Rated output(MV/V): 2.0±0.15
- Accuracy class: C2
- Maximum number of laod cell verification intervals(N max): 2000
- Minimum number of laod cell verification intervals(Vmin): EMax/5000
- Combined erro(%RO): <±0.030
- Creep(%RO/30min): 0.03
- Temperature effect on sensitivity(%RO/°C): 0.0016
- Temperature effect on zero(%RO/°C): 0.003
- Zero balance(%RO): 1.0
- Input resistance(Ω): 402±6
- Output resistance(Ω): 350±3
- Insulation resistance(MΩ<50V>): 5000
- Recommended excitation voltage(V): 10~15
- Compensated temperature range(°C): -10~+40
- Operating temperature range(°C): -35~+80
- Safe overload(%RO): 150
- Ultimate overload(%RO): 200
- Load cell material: Aluminium
- Plafform size: 350x350mm
- Connecting cable: ø4.2x350mm
- Method of connecting wire: Red(+),Black(-),Green(+),White(-)



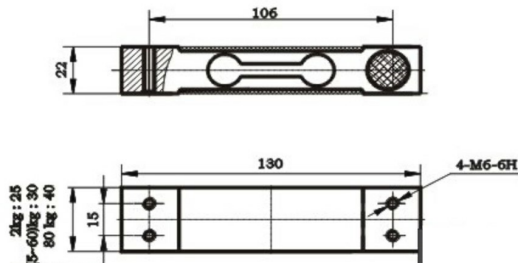


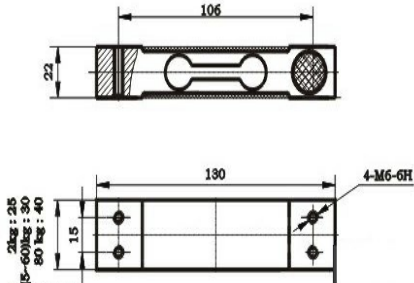

技术指标

应用	Application	计价秤 Price computing scales			
型号	Model	YZC-1B			
量程	Capacity	Kg	2, 3, 5, 8, 8, 10, 30, 35, 40, 50, 80, 80		
输出灵敏度	Rated output	MV/V	2.0±0.15		
精度等级	Accuracy class		C2	C3	
最大检定分度数	Maximum number of verification intervals	Ω_{max}	2000	3000	
最小检定分度值	Minimum load cell verification intervals	V_{min}	$E_{Max}/5000$	$E_{Max}/500$	
综合误差	Combined error	%RO	≤ ±0.030	≤ ±0.020	
蠕变	Creep	%RO/30min	0.03	0.0167	
温度灵敏度漂移	Temperature effect on sensitivity	%RO/℃	0.0016		
温度零点漂移	Temperature effect on zero	%RO/℃	0.003	0.002	
零点平衡	Zero balance	%RO	±1.0		
输入阻抗	Input resistance	Ω	402±6	1066±10	
输出阻抗	Output resistance	Ω	350±3	1000±10	
绝缘电阻	Insulation resistance	$M\Omega$ (50V)	5000		
推荐激励电压	Recommended excitation voltage	V	10~15		
温度补偿范围	Compensated temperature range	℃	-10~+40		
工作温度范围	Operating temperature range	℃	-35~+80		
安全超载能力	Safe overload	%RO	150		
极限超载范围	Ultimate overload	%RO	200		
传感器材料	Load cell material		铝合金 Aluminium		
推荐台面尺寸	Platform size		350X350		
接线电缆	Connecting cable		Ø 4.2X350mm		
接线方式	Method of connecting wire		红输入 (+) 黑输入 (-) 绿输出 (+) 白输出 (-)		

Best-sellers



Technical Details

Dimensions	130mm x 50mm x 23mm
Weight	G.W 168g
Battery	Exclude

Questions and Answers

Have a question about this? Ask people who own it.





Check this out if you don't know how to use it: <http://support.seeedstudio.com...>

Chopin on Oct 19,2016

Reply 1
upvote (0)

View History



POPULAR SEARCHES

PCB Manufacturing	PCB Stencil	Arduino	XBee	Arduino Shield	Beaglebone Black	Raspberry Pi	Raspberry Pi Touchscreen	Linkit	Cubieboard	Beaglebone Cape
FPGA	Linkit ONE	Crazyflie 2.0	Raspberry Pi 3 Model B	RF Explorer	DSO Nano v3	MediaTek X20	HiKey Board	rplidar	rasberry pi relay	RPLIDAR A2



SHIPPING INFORMATION



KNOWLEDGE BASE



HELP CENTER

Seeed Info

[Reach Us](#)

[Distributors](#)

[Designers](#)

[Careers](#)

[Site Map](#)

Customer Service

[Contact Us](#)

[Customer Support](#)

[Technical Support](#)

Terms and Conditions

[Order Information](#)

[Shipping Information](#)

[Payment Information](#)

[Warranty and Return](#)

[Terms of use](#)

[Privacy Policy](#)

Stay Tuned

Subscribe to get the latest product releases, activities and tutorials from Seeed Studio.

>



Copyright © 2008-2017 Seeed Development Limited All rights reserved

PayPal

VISA



Select Language ▼

Contact Support