
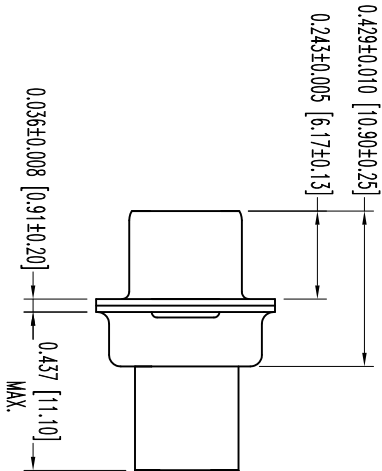


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES INC. THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION, POSITRONIC INDUSTRIES INC. ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK7178

DATE	REV	REVISION RECORD	APP	DR	CK
3-20-06	NC	ECO 25661	RCW	YK	TK
10-26-11	A	ECO 34638	COLL	TL	COLL

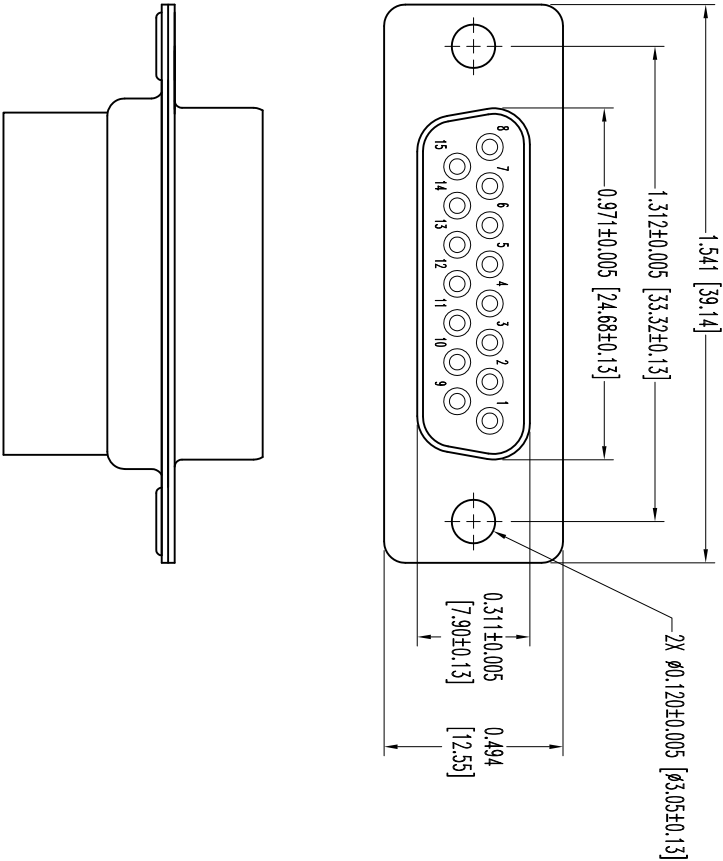


NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED NYLON RESIN, UL 94V-0, BLACK COLOR.
SHELLS: STEEL WITH TIN PLATE.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUB PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARD-DENSITY-D-SUBMINIATURE-OR-CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSC# 28198



DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

SD SERIES

SCALE
N.T.S.

DRAWN BY
YK

APPROVED BY
R. WILLIAMS

TITLE

SD15F0000X/AA

DATE

3-20-06

DRAWING NUMBER

SK7178

REV.

A