

Specification Grade Devices
Buyer's Guide


HUBBELL®

Hubbell-Pro™ Heavy Duty Specification Grade Series
Hubbell Specification Grade Commercial Series



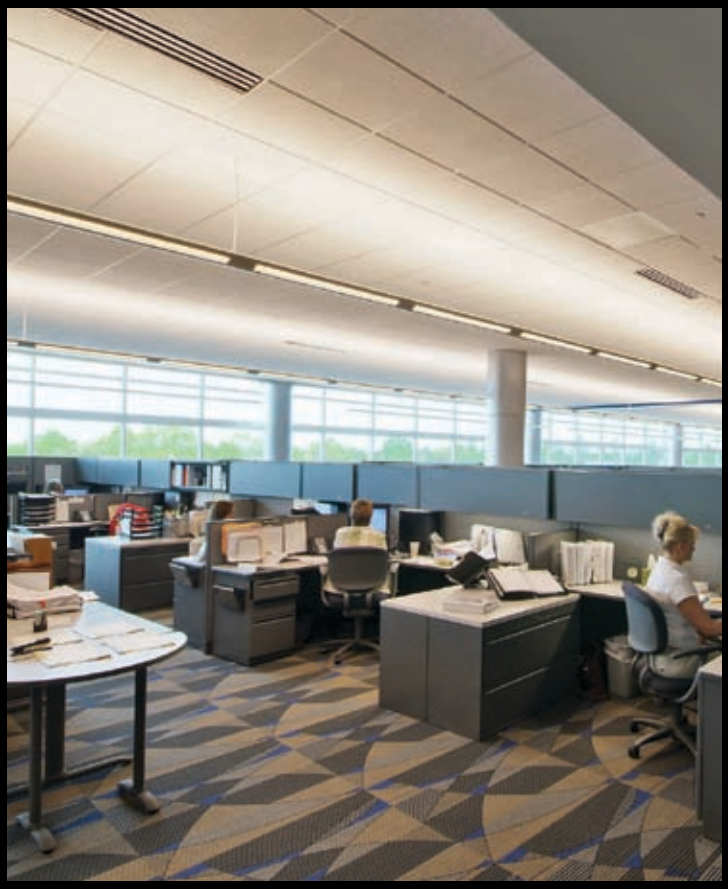

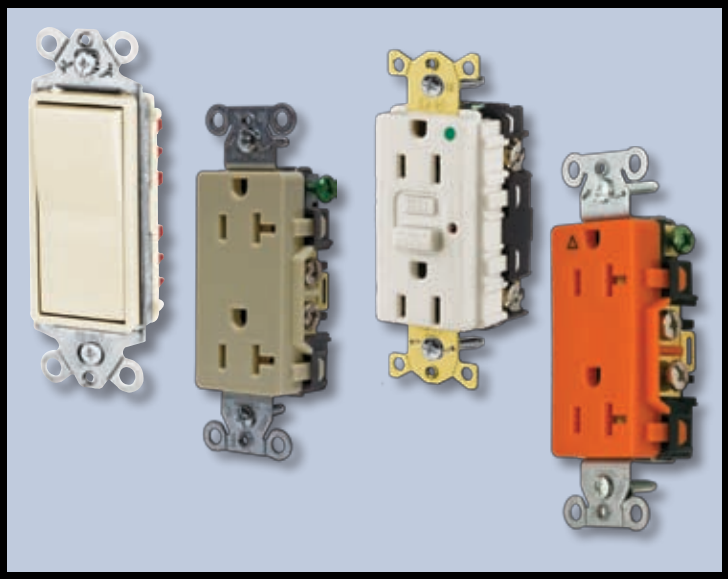

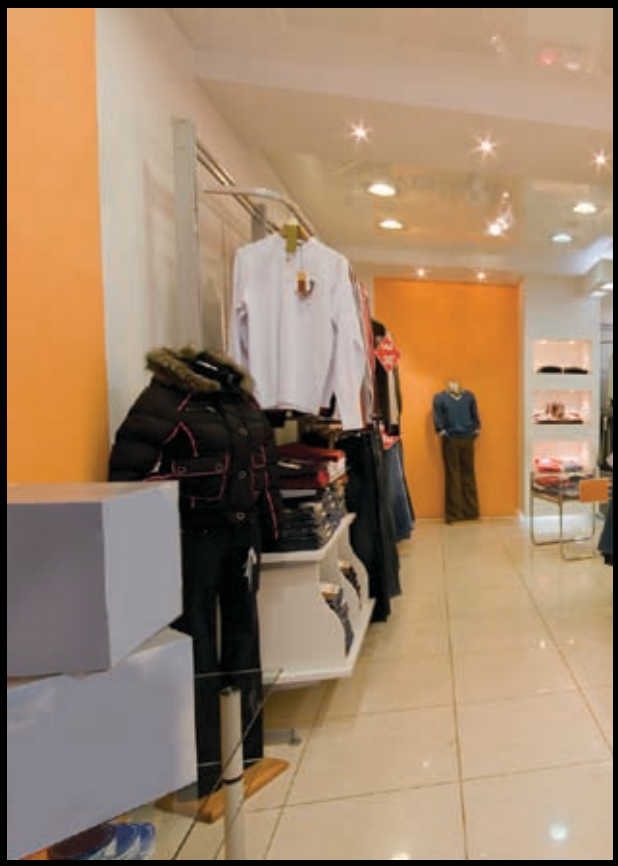

RoHS Compliant Products

HUBBELL® Wiring Device-Kellems

www.hubbell-wiring.com

Downloaded from Arrow.com.

Hubbell-Pro™ Heavy Duty Specification Grade and Commercial

Hubbell-Pro™ Heavy Duty Specification Grade

Description	Color	Standard Receptacle 15A 125V	Standard Receptacle 20A 125V	Hospital Grade 15A 125V	Hospital Grade 20A 125V
SNAP*Connect*™ Finder Face	Brown	SNAP5262	SNAP5362	SNAP8200	SNAP8300
	Almond	SNAP5262AL	SNAP5362AL	SNAP8200AL	SNAP8300AL
	Black	SNAP5262BK	SNAP5362BK	SNAP8200BK	SNAP8300BK
	Gray	SNAP5262GY	SNAP5362GY	SNAP8200GY	SNAP8300GY
	Ivory	SNAP5262I	SNAP5362I	SNAP8200I	SNAP8300I
	Light Almond	SNAP5262LA	SNAP5362LA	SNAP8200LA	SNAP8300LA
	Red	SNAP5262R	SNAP5362R	SNAP8200R	SNAP8300R
	Office White	SNAP5262OW	SNAP5362OW	SNAP8200OW	SNAP8300OW
	White	SNAP5262W	SNAP5362W	SNAP8200W	SNAP8300W

Description	Color	Finder Face Standard Receptacle 15A 125V	Finder Face Standard Receptacle 20A 125V	Hospital Grade 15A 125V	Hospital Grade 20A 125V
Heavy Duty Specification Duplex Back and Side Wired	Brown	5262B	5362B	8200B	8300B
	Almond	5262AL	5362AL	8200AL	8300AL
	Black	5262BLK	5362BLK	—	—
	Blue	5262BL	5362BL	—	—
	Gray	5262G	5362G	8200G	8300G
	Ivory	5262I	5362I	8200I	8300I
	Light Almond	5262LA	5362LA	8200LA	8300LA
	Red	5262R	5362R	8200R	8300R
	Office White	5262OW	5362OW	—	—
	White	5262W	5362W	8200W	8300W

Specification Grade Commercial

Description	Color	Standard Receptacle 15A 125V	Standard Receptacle 20A 125V	Tamper-Resistant 15A 125V	Tamper-Resistant 20A 125V
Style Line® Decorator Back and Side Wired	Brown	DR15	DR20	DR15TR	DR20TR
	Almond	DR15AL	DR20AL	DR15ALTR	DR20ALTR
	Black	DR15BLK	DR20BLK	DR15BLKTR	DR20BLKTR
	Gray	DR15GRY	DR20GRY	DR15GRYTR	DR20GRYTR
	Ivory	DR15I	DR20I	DR15ITR	DR20ITR
	Light Almond	DR15LA	DR20LA	DR15LATR	DR20LATR
	Office White	DR15OW	DR20OW	—	—
	White	DR15WHI	DR20WHI	DR15WHITR	DR20WHITR
Smooth Face Back and Side Wired	Brown	BR15	BR20	BR15TR	BR20TR
	Almond	BR15AL	BR20AL	BR15ALTR	BR20ALTR
	Black	BR15BLK	BR20BLK	BR15BLKTR	BR20BLKTR
	Gray	BR15GRY	BR20GRY	BR15GRYTR	BR20GRYTR
	Ivory	BR15I	BR20I	BR15ITR	BR20ITR
	Light Almond	BR15LA	BR20LA	BR15LATR	BR20LATR
	White	BR15WHI	BR20WHI	BR15WHITR	BR20WHITR
Smooth Face Side Wired Only	Brown	CR15	CR20	CR15TR	CR20TR
	Almond	CR15AL	CR20AL	CR15ALTR	CR20ALTR
	Black	CR15BLK	CR20BLK	CR15BLKTR	CR20BLKTR
	Gray	CR15GRY	CR20GRY	CR15GRYTR	CR20GRYTR
	Ivory	CR15I	CR20I	CR15ITR	CR20ITR
	Light Almond	CR15LA	CR20LA	CR15LATR	CR20LATR
	White	CR15WHI	CR20WHI	CR15WHITR	CR20WHITR
Finder Face Side Wired Only	Brown	CRF15	CRF20	—	—
	Almond	CRF15AL	CRF20AL	—	—
	Black	CRF15BLK	CRF20BLK	—	—
	Gray	CRF15GRY	CRF20GRY	—	—
	Ivory	CRF15I	CRF20I	—	—
	Light Almond	CRF15LA	CRF20LA	—	—
	Office White	CRF15OW	CRF20OW	—	—
	White	CRF15WHI	CRF20WHI	—	—

Commercial Tamper-Resistant Devices are not Fed Spec Listed

Commercial Tamper-Resistant Devices are not Fed Spec Listed


SNAP5362I


SNAP8200I


SNAP2162


5362I


5252AI


DR20ITR


DR20GRYWRTR


IG20DR

Downloaded from Arrow.com.

Specification Grade Duplex Receptacles

Style Line® Decorator Devices are not Fed Spec Listed

Style Line® Decorator* 15A 125V	Style Line® Decorator* 20A 125V	Hospital Grade Style Line® Decorator 15A 125V	Hospital Grade Style Line® Decorator 20A 125V
SNAP2152	SNAP2162	SNAP2172	SNAP2182
SNAP2152AL	SNAP2162AL	SNAP2172AL	SNAP2182AL
SNAP2152BK	SNAP2162BK	SNAP2172BK	SNAP2182BK
SNAP2152GY	SNAP2162GY	SNAP2172GY	SNAP2182GY
SNAP2152I	SNAP2162I	SNAP2172I	SNAP2182I
SNAP2152LA	SNAP2162LA	SNAP2172LA	SNAP2182LA
SNAP2152R	SNAP2162R	SNAP2172R	SNAP2182R
—	—	—	—
SNAP2152W	SNAP2162W	SNAP2172W	SNAP2182W

SNAP*Connect*™ Pigtail Terminal

Description	
Clear terminal; 6 in. leads	
Straight	
Solid wire	SNAP6R1
Stranded wire	SNAP6R2
90° Angle	
Solid wire	SNAP1R
Stranded wire	SNAP2R



Smooth Face Standard Duplex 15A 125V	Smooth Face Standard Duplex 20A 125V	Color	Isolated Ground 15A 125V	Isolated Ground 20A 125V
5252AB	5352AB	Orange	IG5252	IG5352
5252AAL	5352AAL	Almond	IG5252AL	IG5352AL
5252ABLK	5352ABLK	Gray	IG5252GY	IG5352GY
—	—	Ivory	IG5252I	IG5352I
5252AG	5352AG	Light Almond	IG5252LA	IG5352LA
5252AI	5352AI	White	IG5252W	IG5352W
5252ALA	5352ALA			
5252AR	5352AR			
5252AOW	5352AOW			
5252AW	5352AW			

Weather Resistant 15A 125V	Weather Resistant 20A 125V	Weather and Tamper-Resistant 15A 125V	Weather and Tamper-Resistant 20A 125V	Color	Isolated Ground 15A 125V	Isolated Ground 20A 125V
—	—	DR15WRTR	DR20WRTR	Orange	IG15DR	IG20DR
—	—	DR15ALWRTR	DR20ALWRTR	Almond	IG15DRAL	IG20DRAL
—	—	DR15BLKWRTR	DR20BLKWRTR	Gray	IG15DRGRY	IG20DRGRY
—	—	DR15GRYWRTR	DR20GRYWRTR	Ivory	IG15DRI	IG20DRI
—	—	DR15IWRTR	DR20IWRTR	Light Almond	IG15DRLA	IG20DRLA
—	—	DR15LAWRTR	DR20LAWRTR	White	IG15DRW	IG20DRW
—	—	—	—			
—	—	DR15WHIWRTR	DR20WHIWRTR			
BR15WR	BR20WR	BR15WRTR	BR20WRTR		—	—
BR15ALWR	BR20ALWR	BR15ALWRTR	BR20ALWRTR		—	—
BR15BLKWR	BR20BLKWR	BR15BLKWRTR	BR20BLKWRTR		—	—
BR15GRYWR	BR20GRYWR	BR15GRYWRTR	BR20GRYWRTR		—	—
BR15IWR	BR20IWR	BR15IWRTR	BR20IWRTR		—	—
BR15LAWR	BR20LAWR	BR15LAWRTR	BR20LAWRTR		—	—
BR15WHIWR	BR20WHIWR	BR15WHIWRTR	BR20WHIWRTR		—	—
—	—	—	—	Orange	IG15CR	IG20CR
—	—	—	—	Almond	IG15CRAL	IG20CRAL
—	—	—	—	Gray	IG15CRGRY	IG20CRGRY
—	—	—	—	Ivory	IG15CRI	IG20CRI
—	—	—	—	Light Almond	IG15CRLA	IG20CRLA
—	—	—	—	White	IG15CRWHI	IG20CRWHI
—	—	—	—		—	—
—	—	—	—		—	—
—	—	—	—		—	—
—	—	—	—		—	—
—	—	—	—		—	—
—	—	—	—		—	—
—	—	—	—		—	—
—	—	—	—		—	—


BR15I


BR15IWR


BR20WRTR


CR15I


CR15TR


CRF15WHI


IG20CR

Tamper-Resistant Receptacle

Weather Resistant Receptacle

HUBBELL Wiring Device-Kellems

Downloaded from Arrow.com.

Specification Grade Switches

Hubbell-Pro™ Heavy Duty Specification Grade Back and Side Wired

Color	Single Pole 15A	Single Pole 20A	Double Pole 15A	Double Pole 20A	Three Way 15A	Three Way 20A	Four Way 15A	Four Way 20A
Brown	**1201B**	**1221B**	—	**1222B**	**1203B**	**1223B**	—	**1224B**
Almond	**1201AL**	**1221AL**	—	**1222AL**	**1203AL**	**1223AL**	—	**1224AL**
Black	**1201BK**	**1221BK**	—	**1222BK**	**1203BK**	**1223BK**	—	**1224BK**
Gray	**1201GY**	**1221GY**	—	**1222GY**	**1203GY**	**1223GY**	—	**1224GY**
Ivory	**1201I**	**1221I**	—	**1222I**	**1203I**	**1223I**	—	**1224I**
Light Almond	**1201LA**	**1221LA**	—	**1222LA**	**1203LA**	**1223LA**	—	**1224LA**
Red	—	**1221R**	—	**1222R**	—	**1223R**	—	**1224R**
White	**1201W**	**1221W**	—	**1222W**	**1203W**	**1223W**	—	**1224W**

Specification Grade Commercial Style Line® Decorator Back and Side Wired

Color	Single Pole 15A	Single Pole 20A	Double Pole 15A	Double Pole 20A	Three Way 15A	Three Way 20A	Four Way 15A	Four Way 20A
Brown	**DS115**	**DS120**	—	**DS220B**	**DS315**	**DS320**	—	**DS420**
Almond	**DS115AL**	**DS120AL**	—	**DS220AL**	**DS315AL**	**DS320AL**	—	**DS420AL**
Black	**DS115BK**	**DS120BK**	—	**DS220BK**	**DS315BK**	**DS320BK**	—	**DS420BK**
Gray	**DS115GY**	**DS120GY**	—	**DS220GY**	**DS315GY**	**DS320GY**	—	**DS420GY**
Ivory	**DS115I**	**DS120I**	—	**DS220I**	**DS315I**	**DS320I**	—	**DS420I**
Light Almond	**DS115LA**	**DS120LA**	—	**DS220LA**	**DS315LA**	**DS320LA**	—	**DS420LA**
Office White	**DS115OW**	**DS120OW**	—	**DS220OW**	**DS315OW**	**DS320OW**	—	**DS420OW**
White	**DS115W**	**DS120W**	—	**DS220W**	**DS315W**	**DS320W**	—	**DS420W**

Specification Grade Commercial Illuminated and Pilot Light Style Line® Decorator

Color	Single Pole 15A	Single Pole 20A	Double Pole 15A	Double Pole 20A	Three Way 15A	Three Way 20A	Four Way 15A	Four Way 20A
Ivory	—	**DS120IL**	—	—	—	**DS320IL**	—	—
White	—	**DS120ILW**	—	—	—	**DS320ILW**	—	—
Pilot light	—	**DS120PL**	—	—	—	—	—	—

Specification Grade Commercial Back and Side Wired

Color	Single Pole 15A	Single Pole 20A	Double Pole 15A	Double Pole 20A	Three Way 15A	Three Way 20A	Four Way 15A	Four Way 20A
Brown	**CSB115**	**CSB120**	**CSB215**	**CSB220**	**CSB315**	**CSB320**	**CSB415**	**CSB420**
Almond	**CSB115AL**	**CSB120AL**	**CSB215AL**	**CSB220AL**	**CSB315AL**	**CSB320AL**	**CSB415AL**	**CSB420AL**
Black	**CSB115BK**	**CSB120BK**	**CSB215BK**	**CSB220BK**	**CSB315BK**	**CSB320BK**	**CSB415BK**	**CSB420BK**
Gray	**CSB115GY**	**CSB120GY**	**CSB215GY**	**CSB220GY**	**CSB315GY**	**CSB320GY**	**CSB415GY**	**CSB420GY**
Ivory	**CSB115I**	**CSB120I**	**CSB215I**	**CSB220I**	**CSB315I**	**CSB320I**	**CSB415I**	**CSB420I**
Light Almond	**CSB115LA**	**CSB120LA**	**CSB215LA**	**CSB220LA**	**CSB315LA**	**CSB320LA**	**CSB415LA**	**CSB420LA**
Office White	—	**CSB120OW**	—	**CSB220OW**	—	**CSB320OW**	—	**CSB420OW**
Red	—	**CSB120R**	—	**CSB220R**	—	**CSB320R**	—	**CSB420R**
White	**CSB115W**	**CSB120W**	**CSB215W**	**CSB220W**	**CSB315W**	**CSB320W**	**CSB415W**	**CSB420W**

Specification Grade Commercial Side Wired Only

Color	Single Pole 15A	Single Pole 20A	Double Pole 15A	Double Pole 20A	Three Way 15A	Three Way 20A	Four Way 15A	Four Way 20A
Brown	**CS115**	**CS120**	—	—	**CS315**	**CS320**	—	—
Almond	**CS115AL**	**CS120AL**	—	—	**CS315AL**	**CS320AL**	—	—
Gray	**CS115GY**	**CS120GY**	—	—	**CS315GY**	**CS320GY**	—	—
Ivory	**CS115I**	**CS120I**	—	—	**CS315I**	**CS320I**	—	—
Light Almond	**CS115LA**	**CS120LA**	—	—	**CS315LA**	**CS320LA**	—	—
Office White	**CS115OW**	**CS120OW**	—	—	**CS315OW**	**CS320OW**	—	—
White	**CS115W**	**CS120W**	—	—	**CS315W**	**CS320W**	—	—


1201I


1221B


DS120


DS120IL


CS115I


CSB120

Downloaded from Arrow.com.

Commercial GFCI and Surge Suppression Receptacles

Commercial Series LED, GFCI



15A 125V
NEMA 5-15R



20A 125V
NEMA 5-20R



15A 125V
NEMA 5-15R



20A 125V
NEMA 5-20R

Description	Color	Standard Receptacles 15A 125V	Standard Receptacles 20A 125V	Hospital Grade 15A 125V	Hospital Grade 20A 125V
15 and 20 Ampere; 125 Volts; 2-Pole, 3-Wire Grounding Meets July 28, 2006 UL Standard 943 Class A GFCI	Brown	**GF15LA**	**GF20LA**	**GFR8200HLA**	**GFR8300HLA**
	Almond	**GF15ALLA**	**GF20ALLA**	**GFR8200HALLA**	**GFR8300HALLA**
	Black	**GF15BKLA**	**GF20BKLA**	**GFR8200HBKLA**	**GFR8300HBKLA**
	Gray	**GF15GYLA**	**GF20GYLA**	**GFR8200HGYLA**	**GFR8300HGYLA**
	Ivory	**GF15ILA**	**GF20ILA**	**GFR8200HILA**	**GFR8300HILA**
	Light Almond	**GF15LALA**	**GF20LALA**	**GFR8200HLALA**	**GFR8300HLALA**
	Office White	**GF15OWLA**	**GF20OWLA**	**GFR8200HOWLA**	**GFR8300HOWLA**
	Red	**GF15RLA**	**GF20RLA**	**GFR8200HRLA**	**GFR8300HRLA**
	White	**GF15WLA**	**GF20WLA**	**GFR8200HWLA**	**GFR8300HWLA**
Tamper-Resistant; 15 and 20 Ampere; 125 Volts; 2-Pole, 3-Wire Grounding Meets July 28, 2006 UL Standard 943 Class A GFCI	Brown	**GFTR15**	**GFTR20**	**GFR8200HTR**	**GFR8300HTR**
	Almond	**GFTR15AL**	**GFTR20AL**	**GFR8200HALTR**	**GFR8300HALTR**
	Black	**GFTR15BK**	**GFTR20BK**	**GFR8200HBKTR**	**GFR8300HBKTR**
	Gray	**GFTR15GY**	**GFTR20GY**	**GFR8200HGYTR**	**GFR8300HGYTR**
	Ivory	**GFTR15I**	**GFTR20I**	**GFR8200HITR**	**GFR8300HITR**
	Light Almond	**GFTR15LA**	**GFTR20LA**	**GFR8200HLATR**	**GFR8300HLATR**
	Office White	**GFTR15OW**	**GFTR20OW**	**GFR8200HOWTR**	**GFR8300HOWTR**
	Red	**GFTR15R**	**GFTR20R**	**GFR8200HRTR**	**GFR8300HRTR**
	White	**GFTR15W**	**GFTR20W**	**GFR8200HWTR**	**GFR8300HWTR**

GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption. All GFCI receptacles listed above are furnished with the proper color nylon wallplate.


GF15ILA


GFTR20I


GFR8200HOWLA


GFR8300HITR

Circuit Guard®, Specification Grade Surge Suppression Duplex Receptacles



15A 125V
NEMA 5-15R



20A 125V
NEMA 5-20R



15A 125V
NEMA 5-15R



20A 125V
NEMA 5-20R

Description	Color	Standard Receptacles 15A 125V	Standard Receptacles 20A 125V	Hospital Grade 15A 125V	Hospital Grade 20A 125V
Surge suppression receptacles with light; 240 joules/15000A per mode.	Blue	**HBL5260SA**	**HBL5360SA**	—	—
	Ivory	**HBL5260ISA**	**HBL5360ISA**	—	—
	Office White	**HBL5260OWSA**	**HBL5360OWSA**	—	—
Surge suppression receptacles with light and alarm; 240 joules/15000A per mode.	Almond	**HBL5262ALSA**	**HBL5362ALSA**	**HBL8262ALSA**	**HBL8362ALSA**
	Blue	**HBL5262SA**	**HBL5362SA**	**HBL8262SA**	**HBL8362SA**
	Gray	**HBL5262GYSA**	**HBL5362GYSA**	**HBL8262GYSA**	**HBL8362GYSA**
	Ivory	**HBL5262ISA**	**HBL5362ISA**	**HBL8262ISA**	**HBL8362ISA**
	Office White	**HBL5262OWSA**	**HBL5362OWSA**	**HBL8262RSA**	**HBL8362RSA**
	White	**HBL5262WSA**	**HBL5362WSA**	**HBL8262WSA**	**HBL8362WSA**
△ Isolated ground, surge suppression receptacles with light and alarm; 240 joules/15000A per mode.	Blue	**IG5262SA**	**IG5362SA**	**IG8262SA**	**IG8362SA**
	Gray	**IG5262GYSA**	**IG5362GYSA**	**IG8262GYSA**	**IG8362GYSA**
	Ivory	**IG5262ISA**	**IG5362ISA**	**IG8262ISA**	**IG8362ISA**
	Office White	**IG5262OWSA**	**IG5362OWSA**	—	—
	Orange	**IG5262OSA**	**IG5362OSA**	**IG8262OSA**	**IG8362OSA**
	Red	—	—	**IG8262RSA**	**IG8362RSA**
	White	**IG5262WSA**	**IG5362WSA**	**IG8262WSA**	**IG8362WSA**


HBL5262GYSA


HBL5362SA


HBL8362ISA


IG8362OSA

Downloaded from Arrow.com.

Hubbell H-MOSS® Occupancy Sensors

The Hubbell H-MOSS line of occupancy sensors features a broad line-up of dual technology, ultrasonic and passive infrared (PIR) ceiling, wall switch and wall mount sensors. Many of the sensors feature Adaptive Technology, a Hubbell breakthrough, which enables building owners and occupants to reduce energy costs, with fewer adjustments. Visit the Hubbell website at www.hubbell-wiring.com to view the complete H-MOSS occupancy sensor offering.

Adaptive Technology

Dual Technology



Type	Catalog Number
Wall Switch	**AD1277x1**
Ceiling	**ATD2000C, ATD1000C, ATD500C**
Wall Mount	**ATD1600W**

Ultrasonic



Type	Catalog Number
Wall Switch	**AU1277x1**
Ceiling	**ATU2000C, ATU1000C, ATU500C**

Passive Infrared (PIR)



Type	Catalog Number
Wall Switch	**AP1277x1, ATP1277x, AT1277x**
Ceiling	**ATP1500C, ATP600C**
Wall Mount	**ATP1600W, ATP120HB**

AD, AU and AP wall switches are available in single or dual circuits, with and without buttons (one button catalog numbers shown). Wall switches are available in Ivory (I) and White (W) as standard colors. To order colors, replace x with appropriate suffix.
Ceiling and wall mount sensors are available in white only. Must use a CU Series control unit with all low voltage ceiling and wall mount sensors.

Non Adaptive


Passive Infrared



Type	Catalog Number
Wall Switch	**WS1277x**
	WS120x
	WS277x
	WS1277W2

For color options, replace x with Ivory (I) or White (W). WS1277W2 is available in white only.

Line Voltage



Technology	
Dual	**LVDT2000Rxxx**
Ultrasonic	**LVUS1500Rxxx**
PIR	**LVUS2000Rxxx**
	LVPR1500R (120-347V AC)

Available in 120V AC and 277V AC. Replace xxx with 120 or 277 for appropriate voltage.

Residential (Occupancy and Vacancy)



Type	Occupancy	Vacancy (manual on)
Wall Switch	**RMS101xx**	**RMS100xx**
	RMS141xx	**RMS140xx**
Wall Switch w/dimming	**RMS121xx**	**RMS120xx**

For color options, replace xx with Ivory (I), White (W), Almond (AL) or Light Almond (LA).

Hubbell Wallplates


Hubbell offers a wide variety of configurations, sizes and finishes in both metal and nylon wallplates for use in Specification, commercial, and residential applications. Hubbell's complete line of wallplates include standard, midsize, custom metal and jumbo in stainless steel, brass, brass plated, chrome, aluminum and nylon. Visit the Hubbell website at www.hubbell-wiring.com to view the complete wallplate offering.

To order nylon wallplates, replace xx with appropriate color suffixes.




Almond (AL) · Black (BK) · Brown (No Suffix) · Gray (GY) · Ivory (I) · Light Almond (LA) · Office White (OW) · Red (R) · White (W)

Toggle Switch




Gang	430 S/S	302/304 S/S	Nylon
1	**SS1L**	**SS1**	**NP1xx**
2	**SS2L**	**SS2**	**NP2xx**
3	**SS3L**	**SS3**	**NP3xx**

Duplex Receptacle




Gang	430 S/S	302/304 S/S	Nylon
1	**SS8L**	**SS8**	**NP8xx**
2	**SS82L**	**SS82**	**NP82xx**
3	—	**SS83**	**NP83xx**

Style Line® Decorator




Gang	430 S/S	302/304 S/S	Nylon
1	**SS26L**	**SS26**	**NP26xx**
2	**SS262L**	**SS262**	**NP262xx**
3	—	**SS263**	**NP263xx**

Blank (Box Mount/Strap Mount)




Gang	430 S/S	302/304 S/S	Nylon
Box Mount			
1	**SS13L**	**SS13**	**NP13xx**
2	**SS23L**	**SS23**	**NP23xx**
Strap Mount			
1	**SS14L**	**SS14**	**NP14xx**
2	**SS24L**	**SS24**	**NP24xx**

Single Receptacle



Gang	Dia. Hole	430 S/S	302/304 S/S	Nylon
1	1.40" (35.6)	**SS7L**	**SS7**	**NP7xx**
1	2.15" (54.6)	**SS723L**	**SS723**	**NP724xx**
2	2.15" (54.6)	**SS703L**	**SS703**	**NP703xx**
1	1.60" (40.6)	**SS720L**	**SS720**	**NP720xx**

Combination



Gang		430 S/S	302/304 S/S	Nylon
2	Toggle/Duplex	**SS18L**	**SS18**	**NP18xx**
2	Toggle/Decorator	**SS126L**	**SS126**	**NP126xx**
2	Duplex/Decorator	—	**SS826**	**NP826xx**
2	Duplex/Blank	—	**SS138**	**NP138xx**

Downloaded from Arrow.com.

Hubbell-Pro™ Plugs, Connectors and Receptacles

Locking Devices

Rating	Poles/Wires	Description	Catalog Number	Conn./Recept.	Plug
15A 125V	2-Pole 3-Wire	Plug	**L515P***		
		Connector	**L515C**		
		Duplex Receptacle; Brown	**L515DR**		
		Duplex Receptacle; Ivory	**L515DRI**		
		Single Receptacle; Black	**L515R**		
20A 125V	2-Pole 3-Wire	Plug	**L520P**		
		Connector	**L520C**		
		Receptacle; Black	**L520R**		
30A 125V	2-Pole 3-Wire	Plug	**L530P***		
		Connector	**L530C**		
		Receptacle; Black	**L530R**		
20A 250V	2-Pole 3-Wire	Plug	**L620P***		
		Connector	**L620C**		
		Receptacle; Black	**L620R**		
30A 250V	2-Pole 3-Wire	Plug	**L630P***		
		Connector	**L630C**		
		Receptacle; Black	**L630R**		
15A 277V AC	2-Pole 3-Wire	Plug	**L715P***		
		Connector	**L715C**		
		Receptacle; Black	**L715R**		
20A 277V AC	2-Pole 3-Wire	Plug	**L720P**		
		Connector	**L720C**		
		Receptacle; Black	**L720R**		
30A 277V AC	2-Pole 3-Wire	Plug	**L730P**		
		Connector	**L730C**		
		Receptacle; Black	**L730R**		
20A 480V AC	2-Pole 3-Wire	Plug	**L820P**		
30A 480V AC	2-Pole 3-Wire	Plug	**L830P**		
20A 125/250V AC	3-Pole 4-Wire	Plug	**L1420P**		
		Connector	**L1420C**		
		Receptacle; Black	**L1420R**		
30A 125/250V AC	3-Pole 4-Wire	Plug	**L1430P**		
		Connector	**L1430C**		
		Receptacle; Black	**L1430R**		
20A 3Ø 250V AC	3-Pole 4-Wire	Plug	**L1520P**		
		Connector	**L1520C**		
		Receptacle; Black	**L1520R**		
30A 3Ø 250V AC	3-Pole 4-Wire	Plug	**L1530P**		
		Connector	**L1530C**		
		Receptacle; Black	**L1530R**		
20A 3Ø 480V AC	3-Pole 4-Wire	Plug	**L1620P**		
		Connector	**L1620C**		
		Receptacle; Black	**L1620R**		
30A 3Ø 480V AC	3-Pole 4-Wire	Plug	**L1630P**		
		Connector	**L1630C**		
		Receptacle; Black	**L1630R**		

Note: * Also available in bulk pack (M1).

Straight Blade Devices

Rating	Poles/Wires	Description	Catalog Number	Conn./Recept.	Plug
15A 125V	2-Pole 3-Wire	Plug	**515SP**		
		Connector	**515SC**		
20A 125V	2-Pole 3-Wire	Plug	**520SP**		
		Connector	**520SC**		

Plug and Connector Boots

Description	Connector	Plug
15A Locking and 15 & 20A Straight Blade	**HBC1**	**HBP1**
20 & 30A Locking	**HBC2**	**HBP2**



L515P



L515C



L730R



515SP



520SC



HBP1



HBC1


Downloaded from Arrow.com.

Specification Grade Devices
Buyer's Guide

HUBBELL


Hubbell-Pro™ Heavy Duty Specification Grade Series
Hubbell Specification Grade Commercial Series

Hubbell-Pro™ Heavy Duty Specification Grade Receptacles

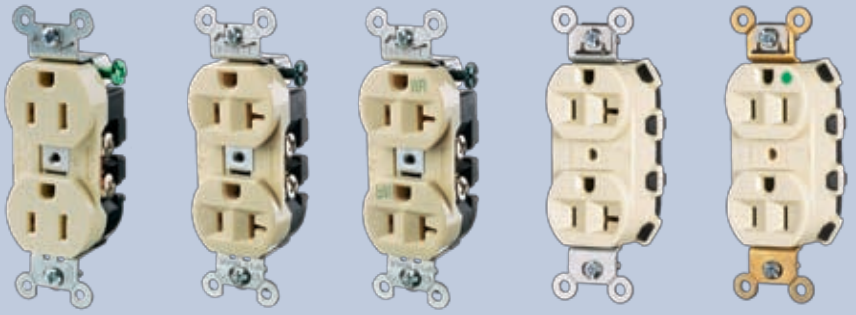


5252AI | 5362I | 5362IWR | SNAP5362LA | SNAP8200LA

Hubbell GFCI Receptacles

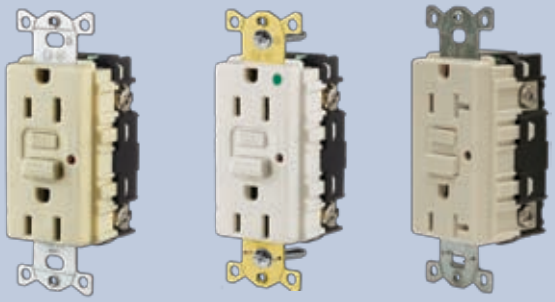

GF15ILA | GFR8200HOWLA | GFTR20I

Hubbell Specification Grade Commercial Receptacles

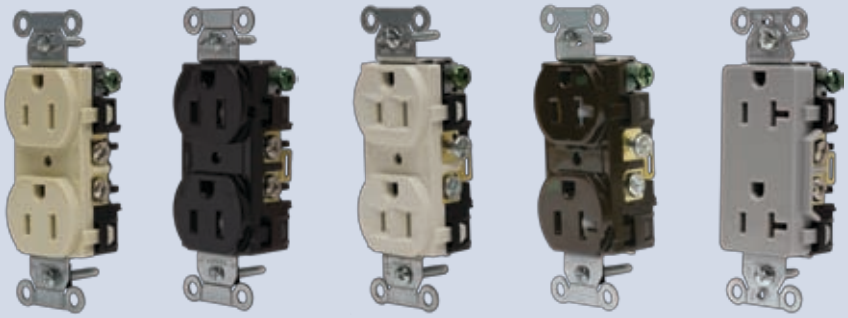


CR15I | CR15TR | CRF15LA | BR20WRTR | DR20GRY

Hubbell H-MOSS® Occupancy Sensors




AD1277W1 | ATD2000C | ATD1600W

Specification Grade Commercial and Hubbell-Pro™ Heavy Duty Specification Grade Switches

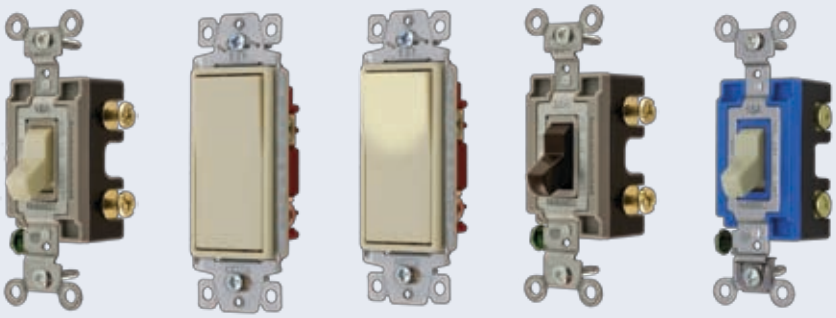

CS115I | DS120I | DS120IL | CSB120 | 1201I

Hubbell-Pro™ Locking and Straight Blade Devices

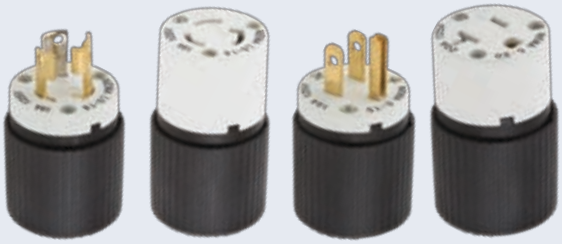

L515P | L515C | 515SP | 520SC

HUBBELL®
Wiring Device-Kellems

www.hubbell-wiring.com

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484 • Phone (800) 288-6000 • FAX (800) 255-1031
Printed in U.S.A. Specifications subject to change without notice.
Circuit Guard®, H-MOSS® and Style Line® are registered trademarks of Hubbell Incorporated. Hubbell-Pro™ and SNAP*Connect*™ are trademarks of Hubbell Incorporated.
WLBHP001R
Downloaded from Arrow.com.