



MSP300

Pressure Transducer

SPECIFICATIONS

- **OEM and End User**
- **One Piece Pressure Port Construction**
- **No O-Rings**
- **No Silicon Oil**
- **No Welds**

The MSP300 pressure transducer from the Microfused line of MEAS sets a new price performance standard for low cost, high volume, commercial and industrial applications. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH or 316L stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings, welds or organics exposed to the pressure media. The durability is excellent.

MEAS' proprietary Microfused technology, derived from demanding aerospace applications, employs micromachined silicon piezoresistive strain gages fused with high temperature glass to a stainless steel diaphragm. This approach achieves media compatibility simply and elegantly while providing an exceptionally stable sensor without the PN junctions of conventional micromachined sensors.

This product is geared towards OEM customers in small to high volumes. Standard configurations are suitable for many applications. Please contact factory for your customization needs.

FEATURES

- One Piece Stainless Steel Construction
- Ranges up to 10kpsi or 700Bar
- mV or Amplified Outputs
- Excellent Accuracy
- Wide Operating Temperature Range

APPLICATIONS

- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- Automotive Test Systems
- Energy and Water Management
- Agriculture – Sprayers and Dusters
- Refrigeration – Freon and Ammonia Based
- General Pressure Measurements

STANDARD RANGES (ALL INTERMEDIATE RANGES ARE STANDARD)

Range (psi)	Range (Bar)	Gage/Compound	Range (Bar DIN)	Gage/Compound
0 to 100	0 to 007	•	0 to 010	•
0 to 200	0 to 010	•	0 to 016	•
0 to 300	0 to 020	•	0 to 025	•
0 to 500	0 to 035	•	0 to 040	•
0 to 01k	0 to 070	•	0 to 060	•
0 to 03k	0 to 200	•	0 to 100	•
0 to 05k	0 to 350	•	0 to 160	•
0 to 10k	0 to 700	•	0 to 250	•
			0 to 400	•
			0 to 600	•
			0 to 01k	•


PERFORMANCE SPECIFICATIONS

Supply Voltage: 5.0V, Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Accuracy (RSS combined Non Linearity, Hysteresis & Repeatability)	-1		1	% F.S.	BFSL @ 25°C
Pressure Cycles	1.00E+6			0~F.S. Cycles	
Proof Pressure	2X			F.S. Rated	
Burst Pressure	5X			F.S. Rated	
Isolation, Body to Any Lead	50			MΩ	@ 250Vdc
Long Term Stability (1 year)	-0.25		0.25	%F.S.	
Zero Thermal Error	-2.0		2.0	%F.S.	Over comp temp
Span Thermal Error	-2.0		2.0	%F.S.	Over comp temp
Zero Offset (mV Output)	-3.0		3.0	%F.S.	@ 25°C
Zero Offset (V Output)	-2.0		2.0	%F.S.	@ 25°C
Span Tolerance	-2.0		2.0	%F.S.	@ 25°C
Compensated Temperature	0		55	°C	
Operating Temperature	-20		+85	°C	
Storage Temperature	-40		+85	°C	
Load Resistance (R _L , mV Output)	1			MΩ	
Load Resistance (R _L , V Output)	5			KΩ	
Response Time		1		ms	
Bandwidth	DC to 1KHz (typical)				
Shock	50g, 11 msec Half Sine Shock per MIL-STD-202G, Method 213B, Condition A				
Vibration	±20g, MIL-STD-810C, Procedure 514.2-2, Curve L				
Wetted Material (except elastomer seal)	17-4PH or 316L Stainless Steel				

For custom configurations, consult factory.

DIMENSIONS

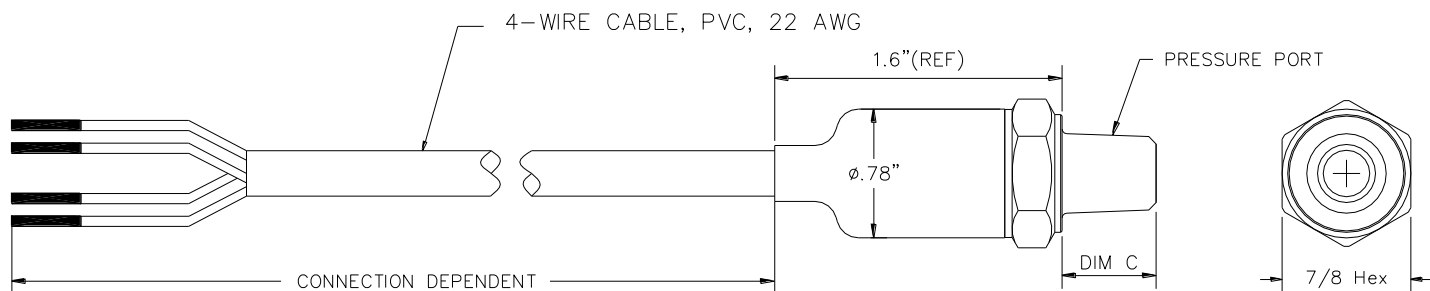

CODE	PORT	DIM C
2	1/4-19 BSPP	0.453 [11.50]
4	7/16-20UNF MALE SAE J1926-2 STRAIGHT THREAD O-RING BUNA-N 90SH-904	0.435
		[11.05]
5	1/4-18 NPT	0.596 [15.14]
6	1/8-27 NPT	0.475 [12.06]
E	1/4-19 BSPT	0.50 [12.70]
F	1/4-19 BSPP FEMALE	0.70 [17.78]
K	1/8-27 NPT FEMALE	0.70 [17.78]
P	7/16-20UNF FEMALE SAE J513 STRAIGHT THREAD WITH INTEGRAL VALVE DEPRESSOR	0.689 [17.50]
Q	M10 x 1.0 mm	0.42 [10.67]
S	M12 x 1.5 mm	0.53 [13.46]
U	G/14 DIN 3852 FORM E GASKET DIN3869-14 NBR	0.547 [13.90]
W	M20 x 1.5 mm	0.702 [17.83]

CODE	CONNECTION TYPE
1	CABLE 2 FT
2	CABLE 4 FT
3	CABLE 10 FT
M	CABLE 1 M
N	CABLE 2 M
P	CABLE 5 M
R	CABLE 10 M

OUTPUT OPTIONS

Code	Output	Supply	Ratiometricity	Red	Black	Green	White
1	0 – 10mV/V	5V	Yes	+Supply	-Supply	+Output	-Output
2	0 – 20mV/V	5V	Yes	+Supply	-Supply	+Output	-Output
3	0.5 – 4.5V	5 ± 0.25V	Yes	+Supply	Common	Cut Off	+Output
4	1 – 5V	8 – 30V	No	+Supply	Common	Cut Off	+Output
5	4 – 20mA	9 – 30V	No	+Supply	-Supply	Cut Off	Cut Off

ORDERING INFORMATION

M30	2	1	-	0	0000	5	-	100P	G
Model	Output	Connection Type	-	Port Material	0000	Pressure Port	-	Pressure Range	Pressure Type
M30	1 = 0 – 10mV/V 2 = 0 – 20mV/V 3 = 0.5 – 4.5V 4 = 1 – 5V 5 = 4 – 20mA	1 = Cable 2 ft 2 = Cable 4 ft 3 = Cable 10 ft M = Cable 1 m N = Cable 2 m P = Cable 5 m R = Cable 10 m	-	0 = 17-4PH W = 316L	0000	2 = 1/4-19 BSPP 4 = 7/16-20UNF Male SAE J1926-2 Straight Thread O-Ring BUNA-N 90SH-904 5 = 1/4-18 NPT 6 = 1/8-27 NPT E = 1/4-19 BSPT F = 1/4-19 BSPP Female K = 1/8-27 NPT Female P = 7/16-20UNF Female SAE J513 Straight Thread with Integral Valve Depressor Q = M10 x 1.0 mm S = M12 x 1.5 mm U = G1/4 DIN 3852 Form E Gasket DIN3869-14 NBR W = M20 x 1.5 mm	-	100P 200P 300P 500P 01KP 03KP 05KP 10KP 007B 010B 020B 035B 070B 200B 350B 700B DIN 010B 016B 025B 040B 060B 100B 160B 250B 400B 600B 01KB	G = Gage C = Compound

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
45738 Northport Loop West
Fremont, CA 94538
Tel: 1-800-767-1888
Fax: 1-510-498-1578
Sales: pfg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.