

NATK Series

Surface Mount Aluminum Electrolytic Capacitors




FEATURES

- EXTENDED TEMPERATURE +125°C & LONG LIFE (T0 5,000 HOURS)
- AVAILABLE WITH ANTI-VIBRATION WIDE TERMINATIONS (8mm Dia. & Larger)
- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- DESIGNED FOR AUTOMATIC MOUNTING AND REFLOW SOLDERING
- MEETS THE REQUIREMENTS OF AEC-Q200*

*Contact NIC for supporting test data


CHARACTERISTICS

Rated Voltage Range	16 ~ 63VDC						
Rated Capacitance Range	10 ~ 3900μF						
Operating Temp. Range	-40 ~ +125°C						
Capacitance Tolerance	±20% (M)						
Max. Leakage Current After 2 Minutes @ 20°C	0.01CV or 3μA whichever is greater						
Working & Surge Voltage Ratings	W.V. (Vdc)	16	25	35	50	63	
	S.V. (Vdc)	20	32	44	63	79	
Tan δ @ 120Hz/20°C		See specifications table (page 2)					0.14
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	16	25	35	50	63	
	Z -25°C/Z +20°C	2	2	2	2	2	
	Z -40°C/Z +20°C	4	3	3	3	3	
Load Life Test at W.V. @ 125°C 6.3 ~ 10mm Diameter: 2,000 Hours 12.5mm Diameter: 3,000 Hours 16 ~18mm Diameter: 5,000 Hours	Capacitance Change	Within ±30% of initial measured value					
	Tan δ	Less than 300% of specified max. value					
	Leakage Current	Less than specified max. value					



STANDARD PRODUCT AND CASE SIZE Dφ xL (mm)

Cap.(μF)	Code	Working Voltage (Vdc)				
		16	25	35	50	63
10	100	-	-	-	6.3X6.3	6.3X8
22	220	-	-	6.3X6.3	-	8X10.8
33	330	-	6.3X6.3	6.3X6.3	-	8X10.8
		-	-	6.3X8	-	-
47	470	6.3X6.3	-	6.3X8	8X10.8	8X10.8
100	101	6.3X8	6.3X8	8X10.8	10X10.8	10X10.8
150	151	-	-	-	-	12.5X14
160	161	-	-	8X10.8	-	12.5X14
220	221	-	8X10.8	10X10.8	12.5X14	12.5X14
270	271	-	8X10.8	-	-	-
300	301	-	-	10X10.8	-	-
330	331	8X10.8	10X10.8	12.5X14	-	16X17
390	391	8X10.8	-	-	-	-
470	471	10X10.8	10X10.8	12.5X14	16X17	16X16
620	621	-	-	12.5X14	-	-
680	681	10X10.8	12.5X14	16X17	18X17.5	-
910	911	-	12.5X14	-	-	-
1000	102	12.5X14	16X17	16X17	18X22	-
1500	152	12.5X14	16X17	18X17.5	-	-
2200	222	16X17	18X17.5	18X22	-	-
3300	332	18X17.5	18X22	-	-	-
3900	392	18X22	-	-	-	-

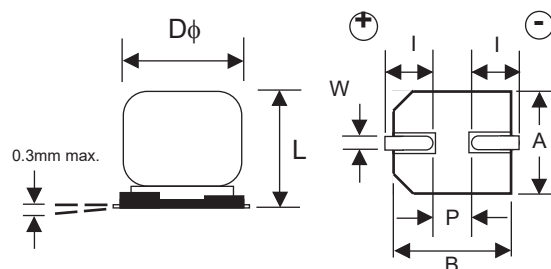

DIMENSIONS (mm)

Case Size	Dφ ±0.5	L max.*	A, B ±0.2	I ±0.3	P ±0.3	W
6.3x6.3	6.3	6.3	6.6	2.5	2.2	0.5 ~ 0.8
6.3x8	6.3	8.0	6.6	2.5	2.2	0.5 ~ 0.8
8x10.8	8.0	10.8	8.3	2.9	3.2	0.7 ~ 1.1
10x10.8	10.0	10.8	10.3	3.2	4.6	0.7 ~ 1.4
12.5x14	12.5	14.0	12.8	4.5	4.6	1.0 ~ 1.4
16x17	16.0	17.0	16.3	5.2	7.0	1.7 ~ 2.1
18x17.5	18.0	17.5	19.0	6.5	7.0	1.7 ~ 2.1
18x22	18.0	*21.5 ^{+0.5/-1.0}	19.0	6.5	7.0	1.7 ~ 2.1

Reflow Code
J = +240°C
K = +245°C
L = +250°C
N = +260°C

Termination / Packaging Code
LB = Sn-Bi / 15" reel
LS = Sn / 15" reel

Note: 16mm & 18mm diameter parts are only available with Sn finish

NATK Series

Surface Mount Aluminum Electrolytic Capacitors



STANDARD VALUES, CASE SIZES & SPECIFICATIONS

Part Number	Cap. (μ F)	Working Voltage	Dissipation Factor @120Hz/+20°C	Max. ESR (Ω) AT 100KHz/+20°C		Max. Ripple Current (mA rms) AT 100KHz/+125°C	Load Life Hours @ +125°C
				+20°C	-40°C		
NATK470M16V6.3X6.3NLYBF	47	16	0.20	1.60	-	110	2,000
NATK101M16V6.3X8NLYBF	100		0.20	0.45	5.0	200	2,000
NATK331M16V8X10.8NLYBF	330		0.20	0.18	3.0	300	2,000
NATK391M16V8X10.8NLYBF	390		0.20	0.18	3.0	300	2,000
NATK471M16V10X10.8LLBYF	470		0.20	0.11	2.0	500	2,000
NATK681M16V10X10.8LLBYF	680		0.20	0.11	2.0	500	2,000
NATK102M16V12.5X14KLBYP	1000		0.20	0.08	1.0	1200	3,000
NATK152M16V12.5X14KLBYP	1500		0.20	0.08	1.0	1200	3,000
NATK222M16V16X17JLSYF	2200		0.22	0.05	0.5	1800	5,000
NATK332M16V18X17.5JLSYF	3300		0.24	0.045	0.45	2000	5,000
NATK392M16V18X22JLSYF	3900		0.24	0.040	0.4	2200	5,000
NATK330M25V6.3X6.3NLYBF	33	25	0.16	1.60	-	110	2,000
NATK101M25V6.3X8NLYBF	100		0.16	0.45	5.0	200	2,000
NATK221M25V8X10.8NLYBF	220		0.16	0.18	3.0	300	2,000
NATK271M25V8X10.8NLYBF	270		0.16	0.18	3.0	300	2,000
NATK331M25V10X10.8LLBYF	330		0.16	0.11	2.0	500	2,000
NATK471M25V10X10.8LLBYF	470		0.16	0.11	2.0	500	2,000
NATK681M25V12.5X14KLBYP	680		0.16	0.08	1.0	1200	3,000
NATK911M25V12.5X14KLBYP	910		0.16	0.08	1.0	1200	3,000
NATK102M25V16X17JLSYF	1000		0.16	0.05	0.5	1800	5,000
NATK152M25V16X17JLSYF	1500		0.16	0.05	0.5	1800	5,000
NATK222M25V18X17.5JLSYF	2200		0.18	0.045	0.45	2000	5,000
NATK332M25V18X22JLSYF	3300		0.20	0.040	0.40	2200	5,000
NATK220M35V6.3X6.3NLYBF	22	35	0.14	1.60	-	110	2,000
NATK330M35V6.3X6.3NLYBF	33		0.14	1.60	-	110	2,000
NATK330M35V6.3X8NLYBF	33		0.14	0.45	5.0	200	2,000
NATK470M35V6.3X8NLYBF	47		0.14	0.45	5.0	200	2,000
NATK101M35V8X10.8NLYBF	100		0.14	0.18	3.0	300	2,000
NATK161M35V8X10.8NLYBF	160		0.14	0.18	3.0	300	2,000
NATK221M35V10X10.8LLBYF	220		0.14	0.11	2.0	500	2,000
NATK301M35V10X10.8LLBYF	300		0.14	0.11	2.0	500	2,000
NATK331M35V12.5X14KLBYP	330		0.14	0.08	1.0	1200	3,000
NATK471M35V12.5X14KLBYP	470		0.14	0.08	1.0	1200	3,000
NATK621M35V12.5X14KLBYP	620		0.14	0.08	1.0	1200	3,000
NATK681M35V16X17JLSYF	680		0.14	0.05	0.5	1800	5,000
NATK102M35V16X17JLSYF	1000		0.14	0.05	0.5	1800	5,000
NATK152M35V18X17.5JLSYF	1500		0.14	0.045	0.45	2000	5,000
NATK222M35V18X22JLSYF	2200		0.16	0.040	0.40	2200	5,000
NATK100M50V6.3X6.3NLYBF	10	50	0.14	2.00	-	70	2000
NATK470M50V8X10.8NLYBF	47		0.14	0.45	5.0	250	2000
NATK101M50V10X10.8LLBYF	100		0.14	0.30	3.0	350	2000
NATK221M50V12.5X14KLBYP	220		0.14	0.15	1.5	700	3000
NATK471M50V16X17JLSYF	470		0.14	0.09	0.9	1000	5000
NATK681M50V18X17.5JLSYF	680		0.14	0.07	0.7	1200	5000
NATK102M50V18X22JLSYF	1000		0.14	0.05	0.5	1650	5000

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Frequency (Hz)	$100 \leq f < 1K$	$1K \leq f < 10K$	$10K \leq f < 100K$	$100K \leq f$
10 μ F ~ 3900 μ F	0.60	0.85	0.93	1.00

Performance Passives By Design

NIC Components Corp.
100 Baylis Road. Melville, NY 11747

Page 2
www.niccomp.com

NATK Series

Surface Mount Aluminum Electrolytic Capacitors




STANDARD VALUES, CASE SIZES & SPECIFICATIONS

Part Number	Cap. (μ F)	Working Voltage	Dissipation Factor @120Hz/+20°C	Max. ESR (Ω) AT 100KHz/+20°C		Max. Ripple Current (mA rms) AT 100KHz/+125°C	Load Life Hours @ +125°C
				+20°C	-40°C		
NATK100M63V6.3X8LLBYF	10	63	0.14	2.00	20	60	2,000
NATK220M63V8X10.8KLBIF	22		0.14	0.70	7.0	140	2,000
NATK330M63V8X10.8KLBIF	33		0.14	0.70	7.0	140	2,000
NATK470M63V8X10.8KLBIF	47		0.14	0.70	7.0	140	2,000
NATK101M63V10X10.8JLBIF	100		0.14	0.30	3.0	260	2,000
NATK101M63V12.5X14JLBIF	100		0.14	0.18	2.0	700	3,000
NATK151M63V12.5X14JLBIF	150		0.14	0.18	2.0	700	3,000
NATK221M63V12.5X14JLBIF	220		0.14	0.18	2.0	700	3,000
NATK331M63V16X17HLSIF	330		0.14	0.13	1.3	1000	5,000
NATK471M63V16X17HLSIF	470		0.14	0.13	1.3	1000	5,000

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Frequency (Hz)	$100 \leq f < 1K$	$1K \leq f < 10K$	$10K \leq f < 100K$	$100K \leq f$
$10\mu F \sim 3900\mu F$	0.60	0.85	0.93	1.00

PART NUMBER SYSTEM

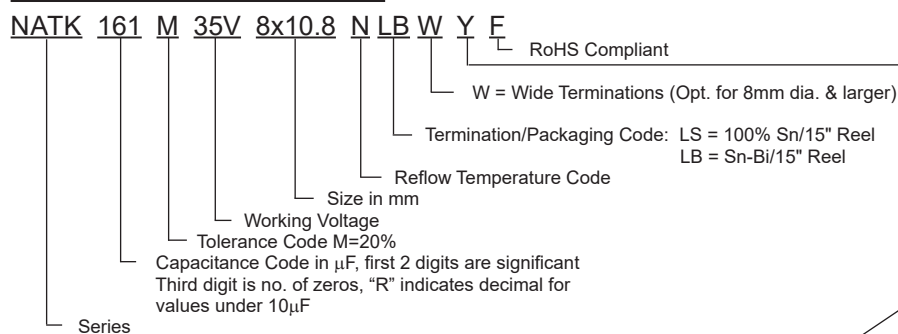


Optional: Suitable for automotive equipment, sourced to special production and inspection at IATF-16949 certified production site.

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at <https://www.niccomp.com/resource/files/aluminum/AlumApplInfoCautions.pdf>
If in doubt or uncertainty, please review your specific application - process details with
NIC's technical support personnel: tpmg@niccomp.com

STANDARD TERMINATIONS LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
6.3x6.3	1.8	3.6	1.8
6.3x8			
8x10.8	2.8	4.1	2.1
10x10.8	4.3	4.4	2.5
12.5x14	4.3	5.8	2.5
16x17	6.6	6.5	5.0
18x17			
18x22	6.6	7.7	5.0






W (WIDE TERMINATIONS) COMPONENT DIM. (mm)

Case Size	Dφ ±0.5	L max.	A, B ±0.2	C ±0.2	P ±0.2	W	R	T
8x10.8	8.0	11.2	8.3	9.0	3.2	0.7 ~ 1.0 (0.7)	(1.3)	
10x10.8	10.0	11.2	10.3	11.0	4.6	1.0 ~ 1.4 (0.7)	(1.3)	
12.5x14	12.5	14.5	13.5	14.2	4.6	1.0 ~ 1.4 (2.2)	(2.4)	
16x17	16.0	17.5	17.0	18.0	7.0	1.7 ~ 2.1 (3.0)	(2.0)	
18x17.5		17.5						
18x22	18.0	22.5	19.0	20.0	7.0	1.7 ~ 2.1 (3.0)	(2.0)	

W (WIDE TERMINATIONS) LAND PATTERN DIM. (mm)

Case Size	a	b	c
8x10.8	2.5	4.5	4.7
10x10.8	3.8	4.8	4.7
12.5x14	3.8	6.1	6.9
16x17	5.0	8.0	9.5
18x17.5			
18x22	5.0	8.6	9.5

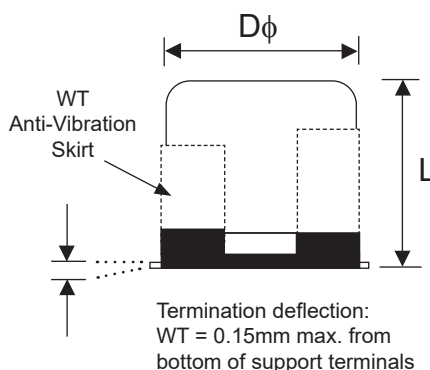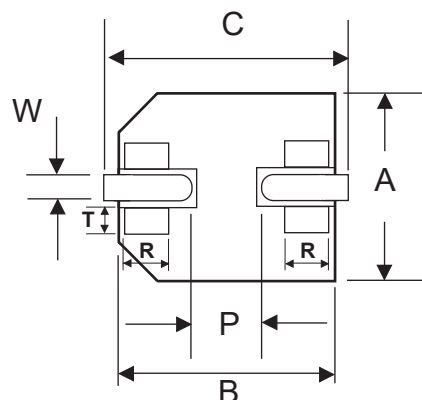

W (Wide Terminations) Anti-Vibration Test	
Test Method	Direction: X, Y, Z axis Frequency & Duration: 5 to 2000Hz reciprocation for 20 minutes, 2 hours each direction Peak to Peak Amplitude: 5mm Peak Acceleration: 30G Sweep Type: Log
Δ Capacitance	Within ± 10% of initial value
Tangent of Loss	≤ Specified value
Leakage Current	≤ Specified value

NATK Series

Surface Mount Aluminum Electrolytic Capacitors



16V ~ 50V PEAK REFLOW TEMPERATURES AND DURATION


Diameter	Time above 200°C	Time above 217°C	Time above 230°C	Peak Temperature 5 seconds
6.3mm & 8mm ϕ	80 sec. max.	70 sec. max.	40 sec. max.	260°C
10mm ϕ	70 sec. max.	60 sec. max.	40 sec. max.	250°C
12.5mm ϕ	60 sec. max.	50 sec. max.	30 sec. max.	245°C
16mm & 18mm ϕ	50 sec. max.	40 sec. max.	20 sec. max.	240°C

63V PEAK REFLOW TEMPERATURES AND DURATION

Diameter	Time above 200°C	Time above 217°C	Time above 230°C	Peak Temperature 5 seconds
6.3mm ϕ	70 sec. max.	60 sec. max.	40 sec. max.	250°C
8mm ϕ	60 sec. max.	50 sec. max.	30 sec. max.	245°C
10mm & 12.5mm ϕ	50 sec. max.	40 sec. max.	20 sec. max.	240°C
16mm ϕ	50 sec. max.	40 sec. max.	15 sec. max.	235°C

Capacitors can withstand two reflow passes under the specified conditions. Capacitors must be allowed to cool to room temperature before the second reflow pass.

Review & Compare Reflow Soldering Heat Limits
V-chip SMT Aluminum Electrolytic Capacitors
www.niccomp.com/RSL

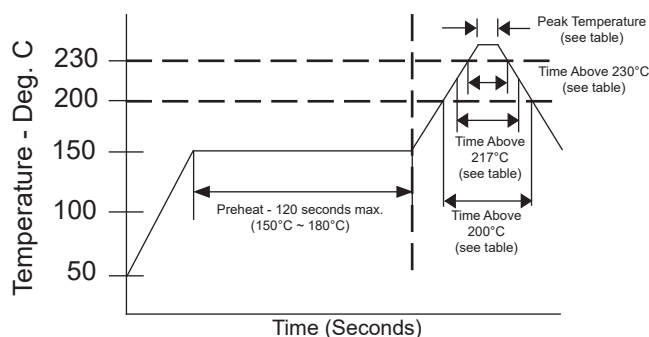


CARRIER TAPE

Case Size	A ± 0.2	B ± 0.2	C ± 0.3	D ± 0.1	P ± 0.1	T ± 0.2	t max.	s ± 0.1
6.3x6.3	7.0	7.0	16.0	7.5	12.0	6.5	0.6	-
6.3x8	7.0	7.0	16.0	7.5	12.0	8.2	0.6	-
8x10.8	8.7	8.7	24.0	11.5	16.0	11.1	0.6	-
10x10.8	10.7	10.7	24.0	11.5	16.0	11.2	0.6	-
12.5x14	13.2	13.2	32.0	14.2	24.0	14.3	0.6	28.4
16x17	17.5	17.5	44.0	20.2	28.0	17.3	0.6	40.4
18x17.5	19.5	19.5	44.0	20.2	32.0	17.8	0.6	40.4
18x22	19.5	19.5	44.0	20.2	32.0	22.5	0.6	40.4

TAPING SPECIFICATIONS (mm)

- Both Leader and Trailer tape: Minimum 10 empty carrier tape pockets.
- Leader tape: Approximately 20cm of cover tape at leader.
- Connection: Maximum 3 connections (slices) per reel.

CARRIER

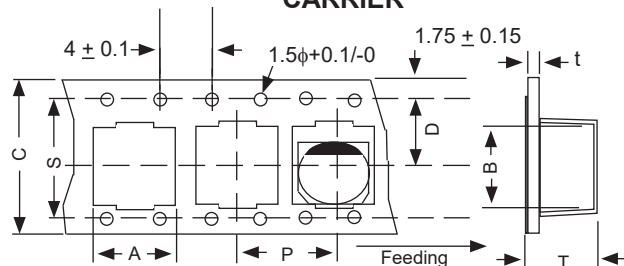


NATK Series

Surface Mount Aluminum Electrolytic Capacitors



V-Chip 15" (380mm) Reels (LB suffix)

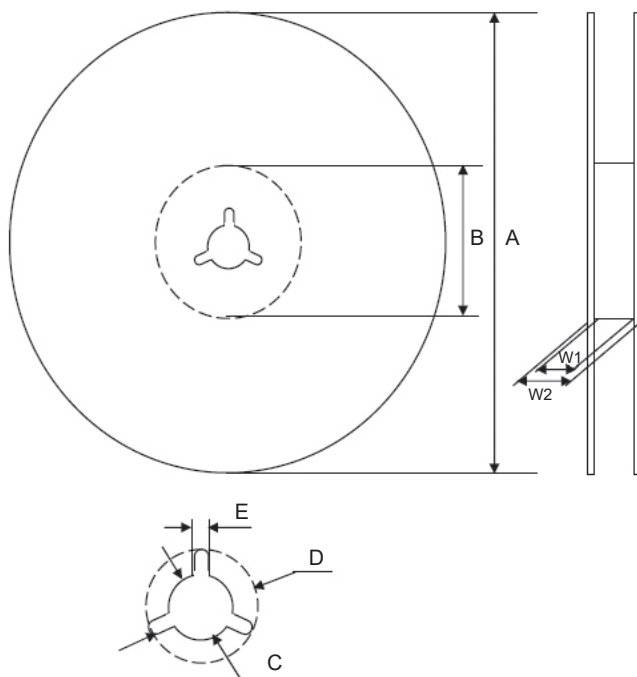

Dimensions (mm)

Case Size	Tape Width	W1	W2
6.3x6.3, 6.3x8	16.0	16.5 ~ 18.0	19.5 ~ 24.0
8x10.8, 10x10.8	24.0	24.5 ~ 26.0	27.5 ~ 32.0
12.5x14	32.0	33.0 ~ 34.0	36.5 ~ 38.5
16x17, 18x17.5, 18x22	44.0	45.0 ~ 46.0	48.5 ~ 50.5

Case Size	Tape Width	A	B	C	D	E
6.3x6.3, 6.3x8	16.0	$\phi 380 \pm 2$	$\phi 80 \sim 105$	$\phi 13 \pm 0.5$	$\phi 21 \pm 1.0$	2.0 ± 0.5
8x10.8, 10x10.8	24.0					
12.5x14	32.0					
16x17, 18x17.5, 18x22	44.0					

Case Size	Qty per Reel 15" (380mm)
6.3x6.3	1000
6.3x8	900
8x10.8	500
10x10.8	500
12.5x14	250
16x17	200
18x17.5	175
18x22	125