

UWB Multi-layer Chip Antenna

ACS0301U

Features

- Supports 6 to 8.2 GHz(UWB Channels 5~9)
- Compact & Low-Profile
- VSWR: ≤ 2.0
- Peak Gain: 2.2 dBi
- Efficiency: up to 63%
- Surface Mount (SMD)
- High efficiency across UWB bands

Applications

- UWB (Ultra-Wide Band)
- Secure car access
- Item Tracking
- Indoor Navigation
- Hands-Free Payment
- Smart Access
- Object Detection

Product Image



UWB Multi-layer Chip Antenna

ACS0301U

Electrical Specification

Parameter	Specification	Unit
Operating Frequency	6000-8200 (US UWB channels 5-9) EU UWB band	MHz
VSWR (Typ.)	< 2.0	
Peak Gain	2.2	dBi
Efficiency (Maximum)	63	%
Impedance	50	Ω
Polarization	Linear	
Radiation Pattern (Azimuth)	Omni-directional	

Note : All test measurements were conducted on 31 x 35 mm. Performance of the chip antenna will vary relative to the ground plane size in use.

Mechanical Specification

Parameter	Specification
Dimensions	3.2 x 1.6 x 1.1 mm
Antenna Clearance Space	11.6 x 6.5 mm
Evaluation Board size	31 x 35 mm
Solder Termination	Ag (Environmental-Friendly Pb-Free)

Environmental Specification

Parameter	Specification
Operating Temperature	-40°C to +85°C
Storage Temperature	-10°C to +40°C
Relative Humidity	70%
RoHS Complaint	Yes



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com


REVISED: 09-15-23

ABRACON IS
ISO9001-2015
CERTIFIED

UWB Multi-layer Chip Antenna

ACS0301U

Product Dimensions

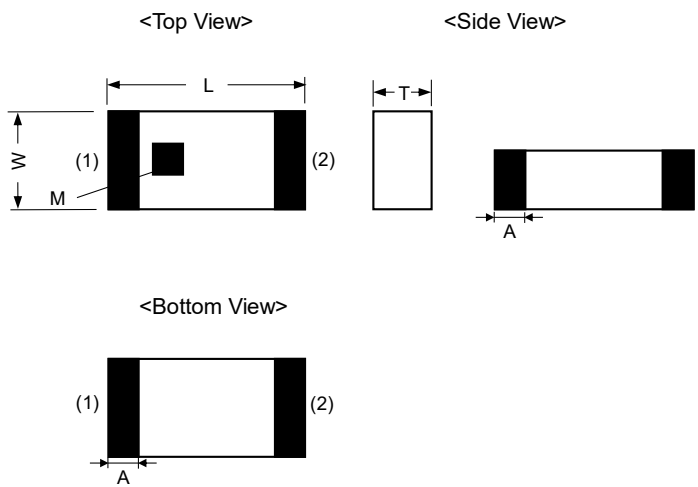

Unit: mm



(1)	Feeding Point
(2)	Not Connected (NC)
M	MARK

MARK	L	W	T	A
Dimensions (mm)	3.20 ±0.20	1.60 ±0.20	1.10 ±0.10	0.5 ±0.10

UWB Multi-layer Chip Antenna

ACS0301U

Evaluation Board Dimensions

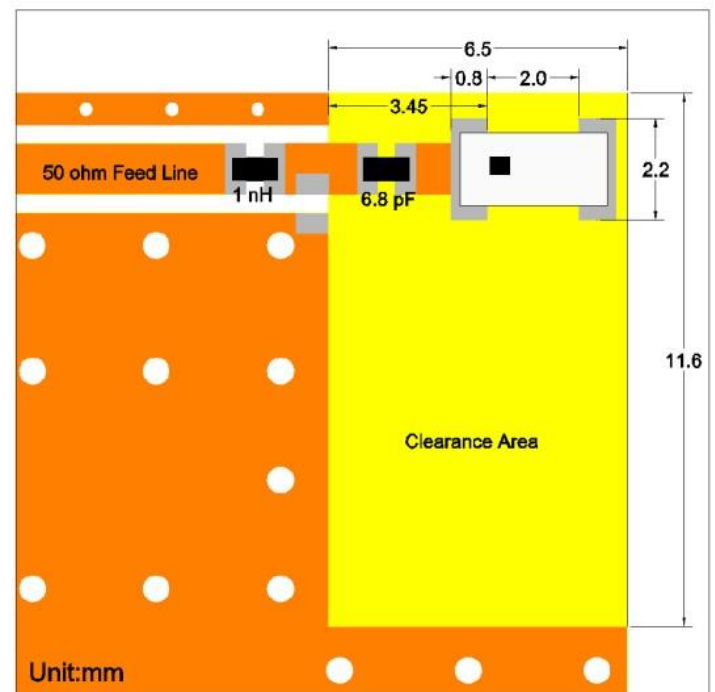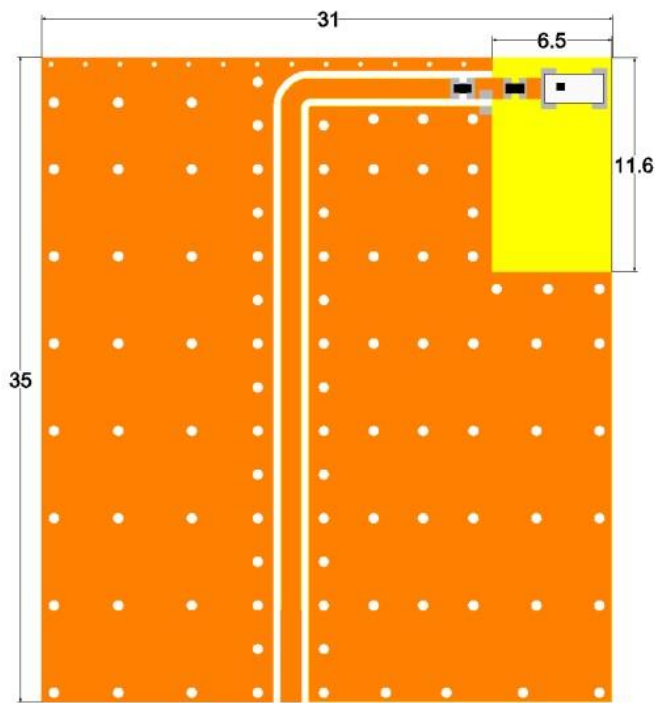


Unit: mm

UWB Multi-layer Chip Antenna

ACS0301U



Measurement Setup photo

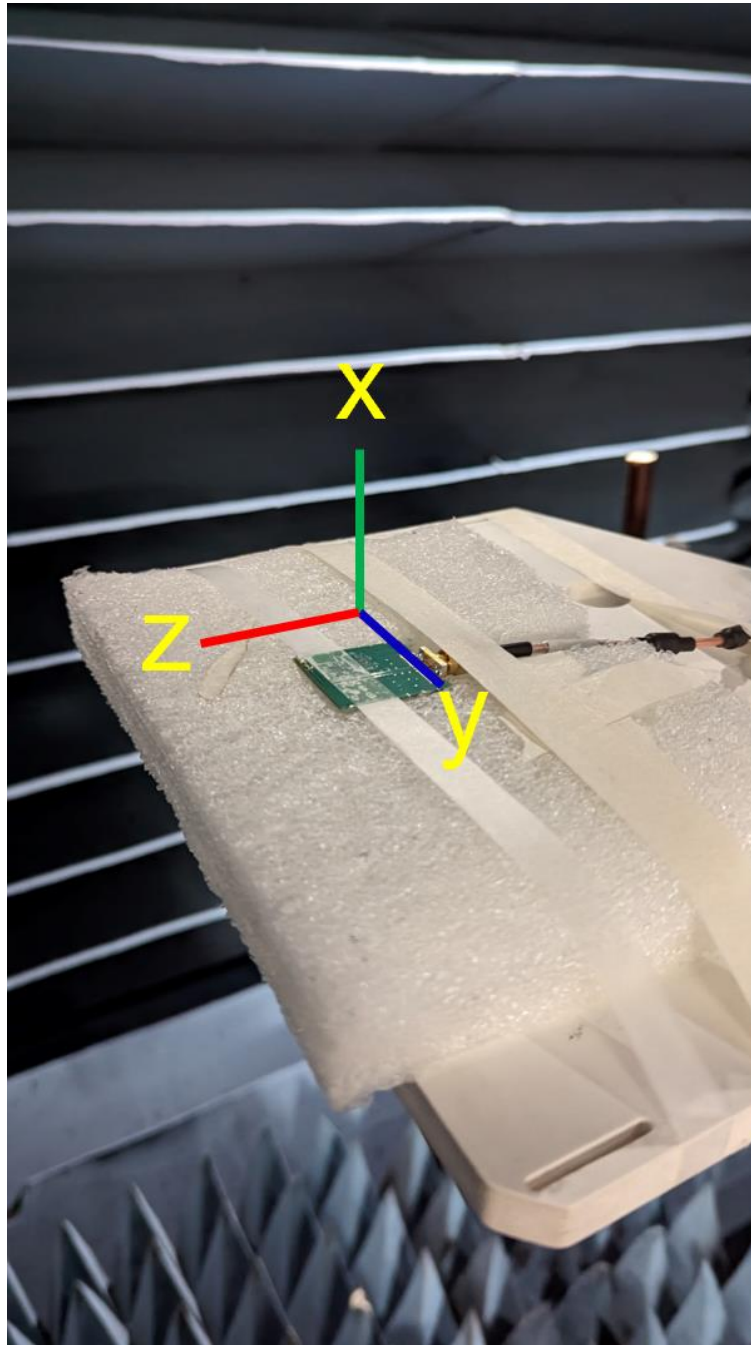

UWB Multi-layer Chip Antenna

ACS0301U


Reflection Characteristics –Return Loss & VSWR

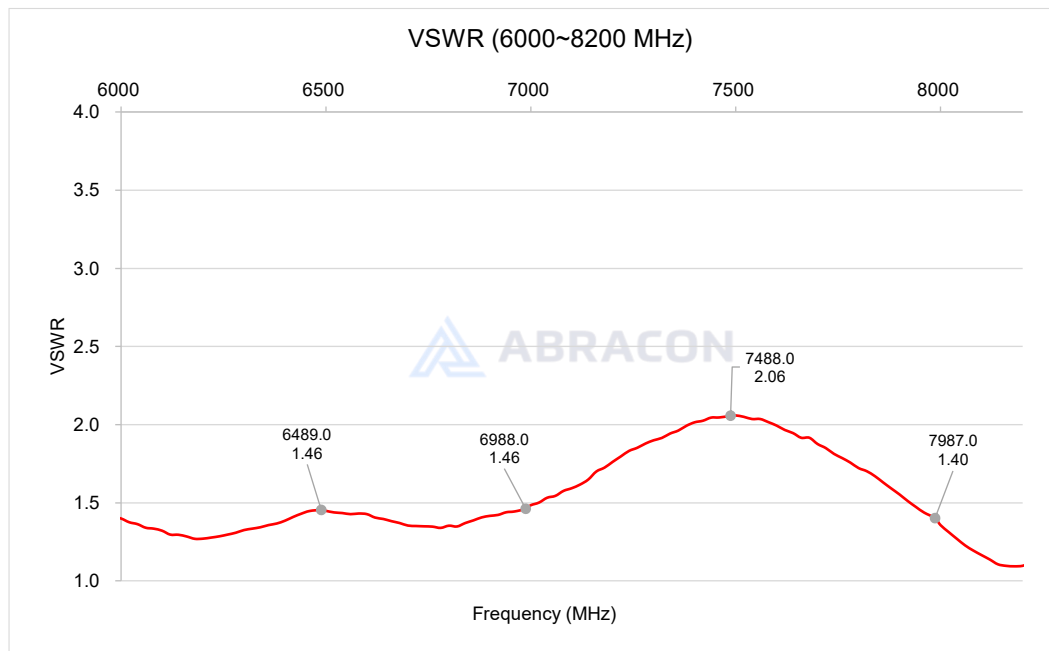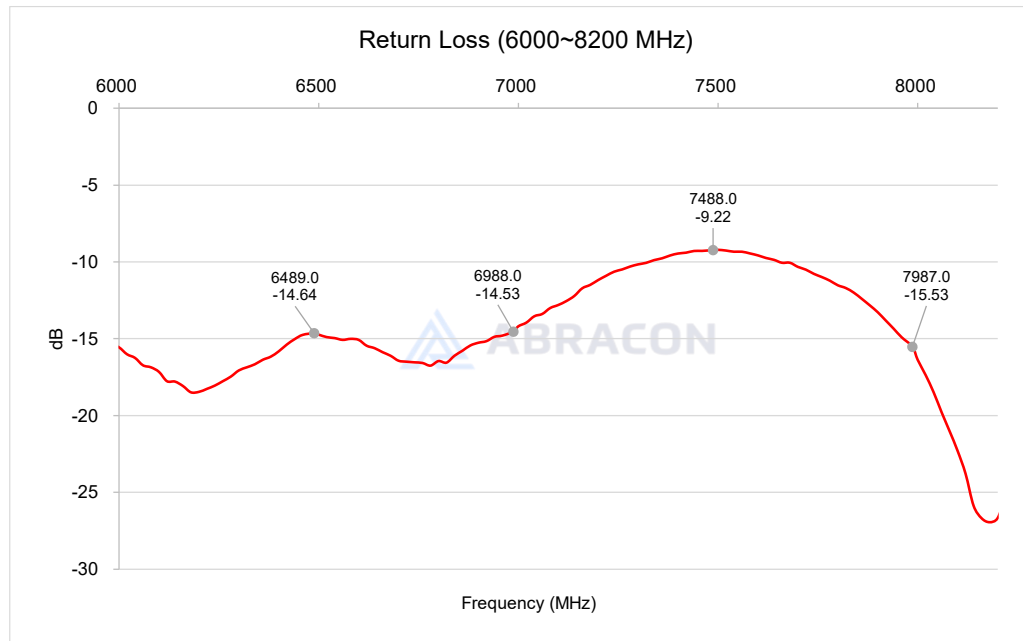

UWB Multi-layer Chip Antenna

ACS0301U


Radiation Characteristics – Peak Gain

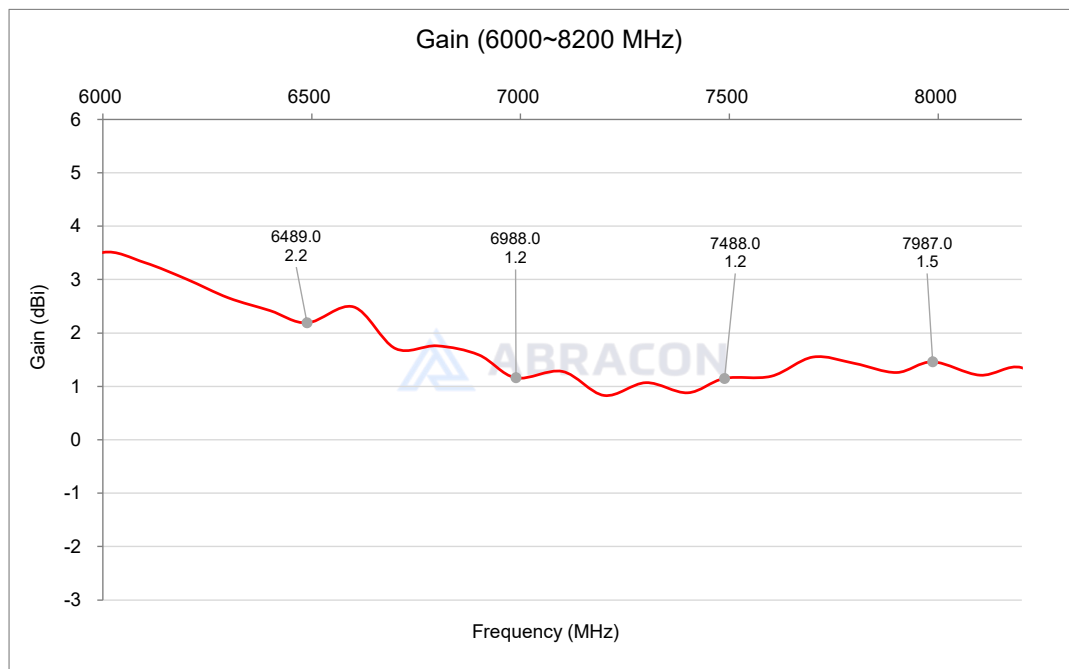

UWB Multi-layer Chip Antenna

ACS0301U

Radiation Characteristics – Total Efficiency (%)




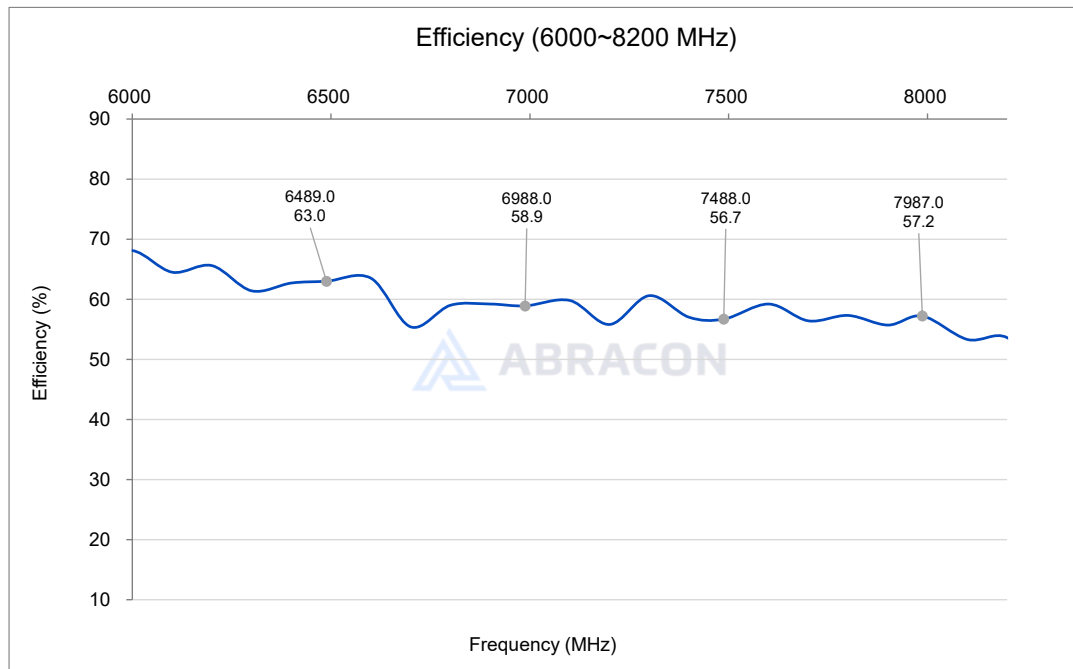


UWB Multi-layer Chip Antenna

ACS0301U

Radiation Characteristics – 3D & 2D Pattern





6500MHz

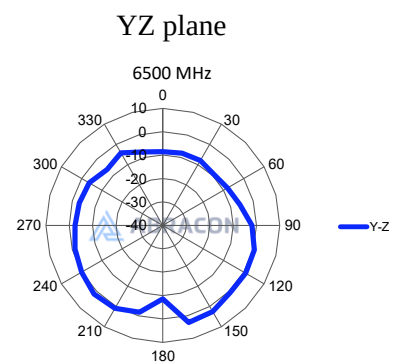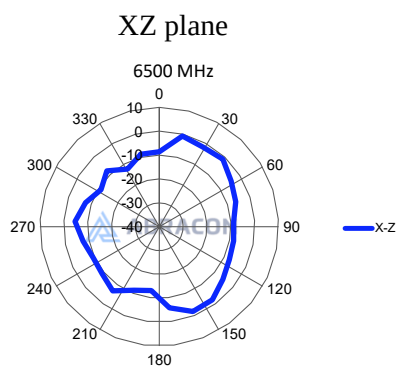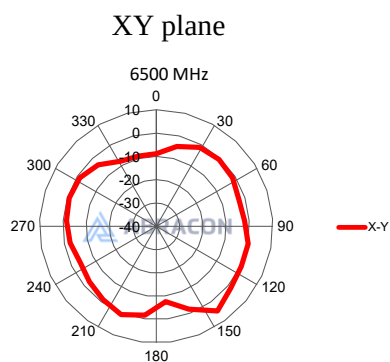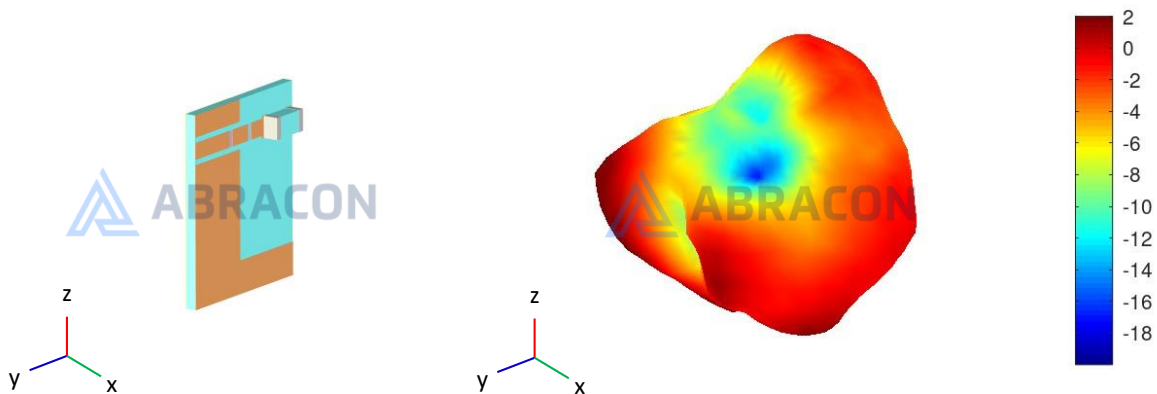

UWB Multi-layer Chip Antenna

ACS0301U





7000MHz

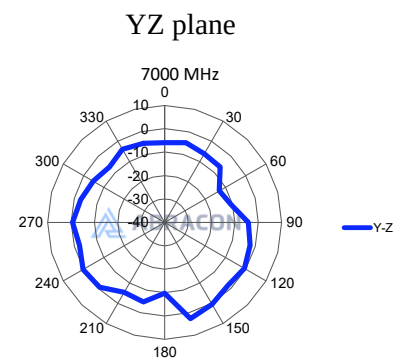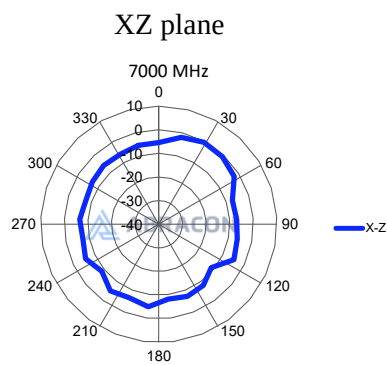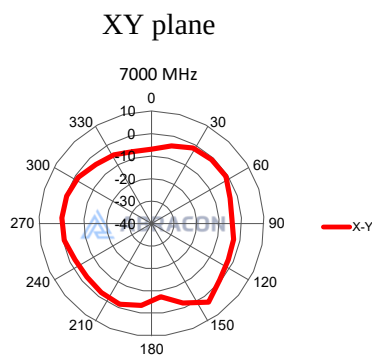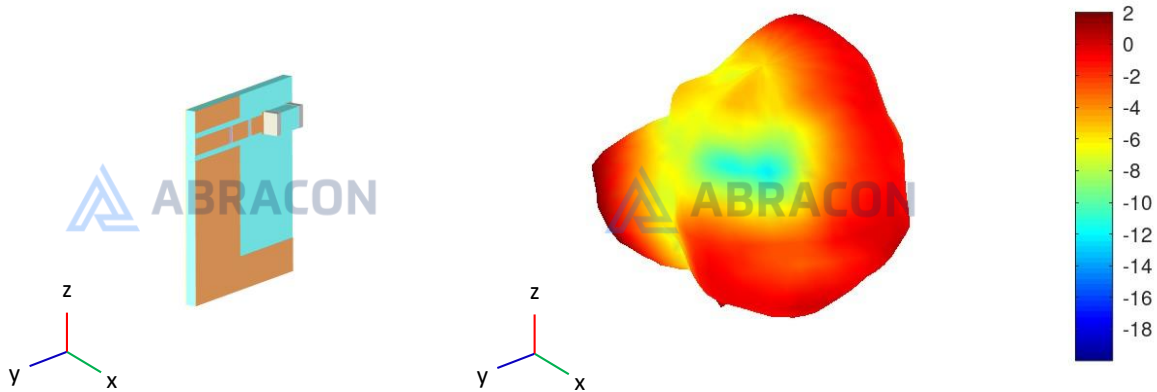

UWB Multi-layer Chip Antenna

ACS0301U





7500MHz

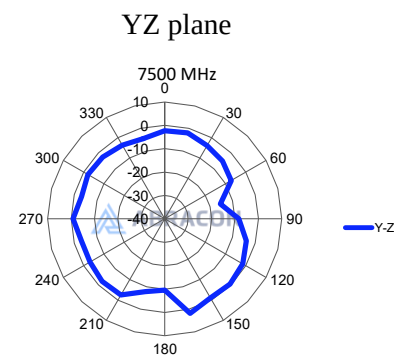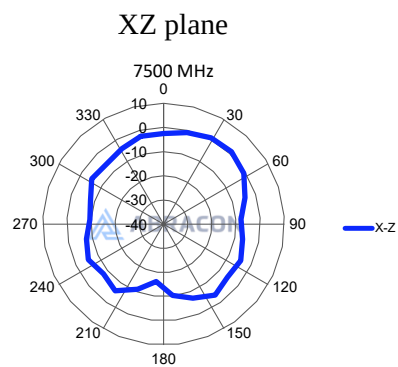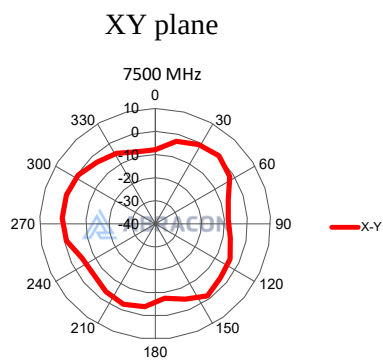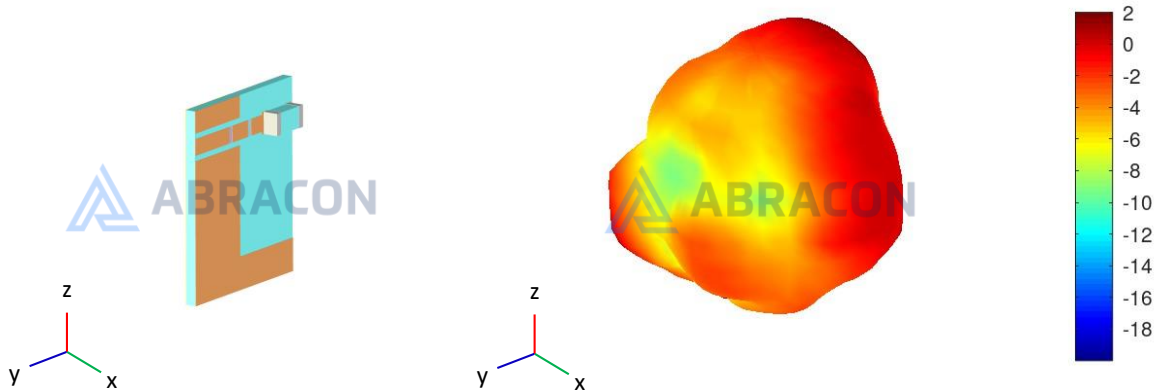

UWB Multi-layer Chip Antenna

ACS0301U

8000MHz

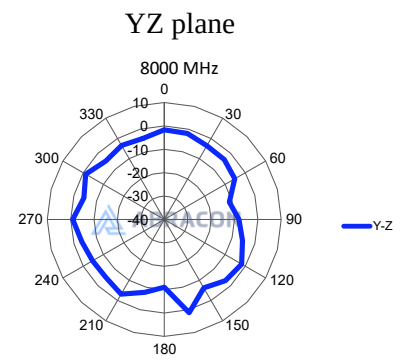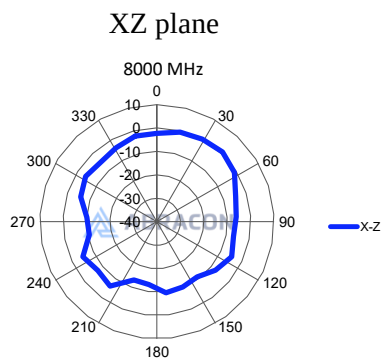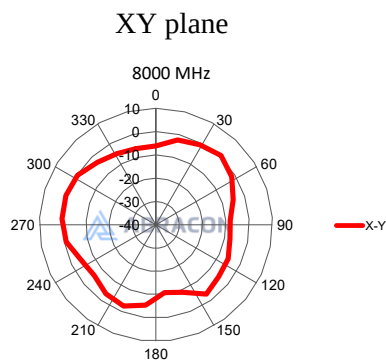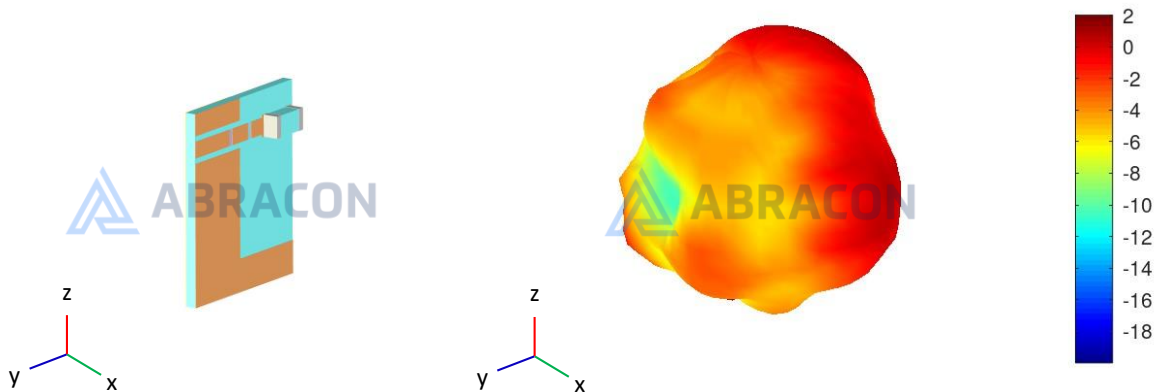

UWB Multi-layer Chip Antenna

ACS0301U


Evaluation Board Outline & Matching Circuit

The evaluation board is developed to showcase the performance of the Niche antenna on a typical PCB and to simplify antenna testing and evaluation. It has a size of 31 x 35 mm. The performance could vary with different PCB sizes and Abracon can offer support to optimize the antenna for your specific application.

The evaluation board has a matching circuit implemented next to the antenna. This is aimed to enable optimization possibilities for the user.

The standard tuning for the evaluation board is the following (can be replaced by equivalent):

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.

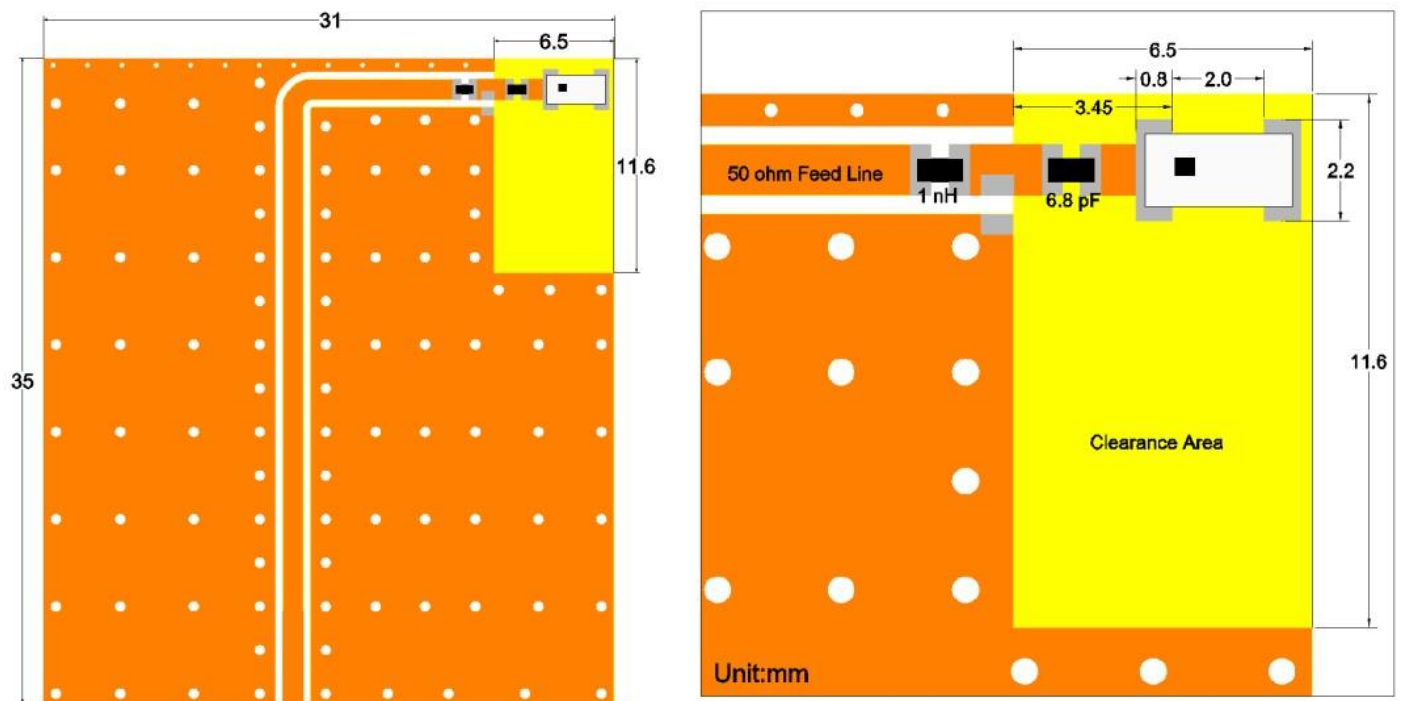

UWB Multi-layer Chip Antenna

ACS0301U

Reflow Profile [JEDEC J-STD-020]

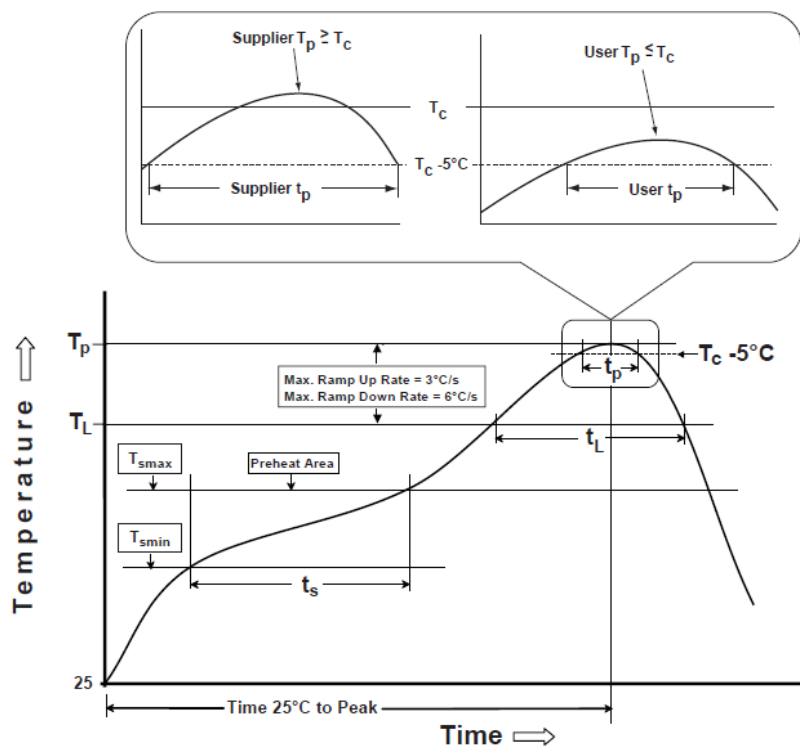


Table 1

SnPb Eutectic Process Classification Temperatures (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process Classification Temperatures (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_P)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_P)*	see Table 1	see Table 2
Time (t_P)** within 5°C of the specified classification temperature (T_C)	20 sec.	30 sec.
Ramp-down rate (T_P to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_P) is defined as a supplier minimum and a user maximum.


**Tolerance for time at peak profile temperature (t_P) is defined as supplier minimum and a user maximum.

UWB Multi-layer Chip Antenna

ACS0301U

Packaging

Tape & Reel Dimension

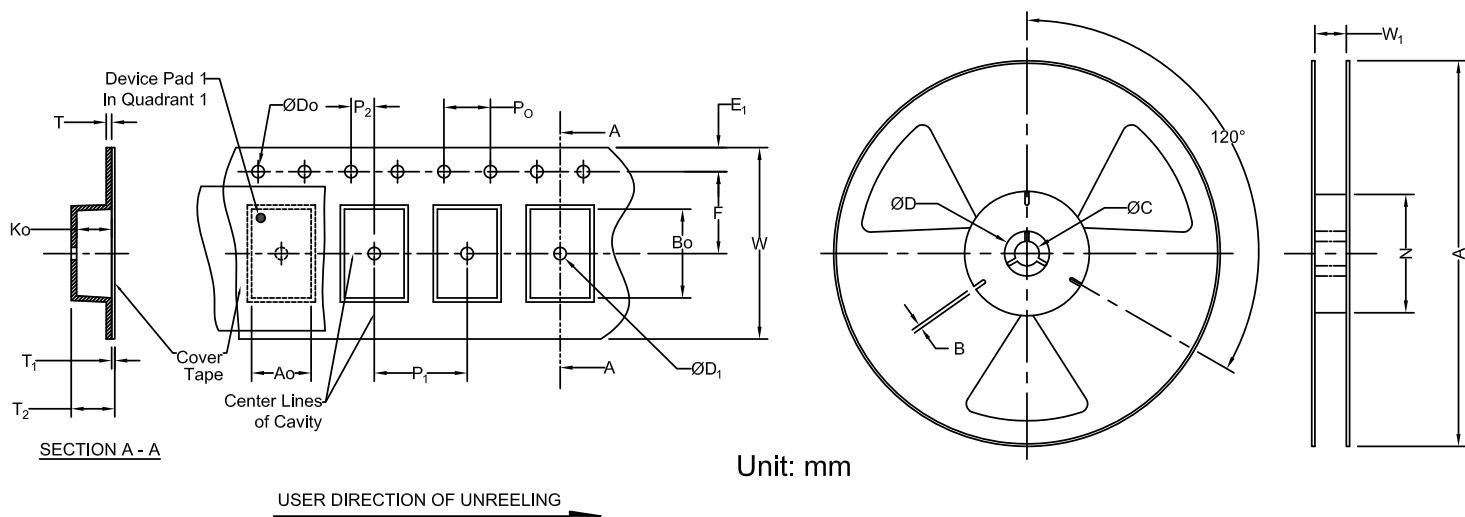

Carrier Tape Specifications (mm)

Do	E ₁	P ₀	P ₂	T	F	P ₁	W	A ₀	B ₀	Reel Qty
1.50 ± 0.1	1.75 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	0.22 ± 0.05	3.5 ± 0.05	4.0 ± 0.1	8.0 ± 0.3	1.8 ± 0.1	3.5 ± 0.1	3,000

Reel Specifications (mm)

A	W ₁	N	B	C
178 ± 2.0	10.0 ± 1.5	58 ± 2.0	3.0 ± 0.1	13.5 ± 0.2

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-15-23

ABRACON IS
 ISO9001-2015
 CERTIFIED