


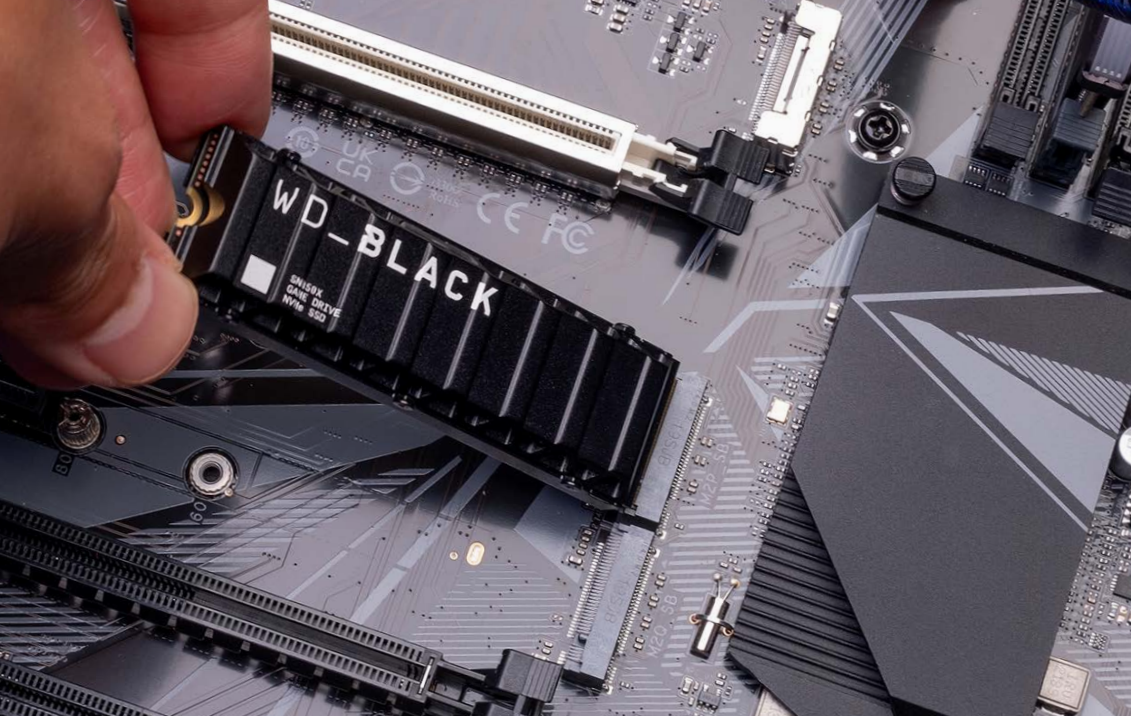

WD_
BLACK™

SANDISK™

WD_BLACK™ SN850X NVMe™ SSD

M.2 2280 NVMe™ SSD GAME DRIVE

BUILT FOR ELITE GAMING.

Crush load times and slash throttling, lagging, and texture pop-ins with the WD_BLACK™ SN850X NVMe™ SSD. Available in capacities of up to 1TB through 8TB¹, this gaming drive is built for top-tier performance. With 7,300MB/s² speeds [1TB - 4TB models] and a heatsink option to maintain performance, you can enjoy your favorite games without worrying about lag. Plus, the downloadable WD_BLACK™ Dashboard [Windows® only] can automatically turn on Game Mode 2.0 features. The WD_BLACK™ SN850X NVMe™ SSD delivers a smooth, fast experience-and the innovations that let you compete at your absolute peak.

KEY FEATURES

- TRANSFORM YOUR PC. Get top-tier performance and ridiculously short load times for your gaming PC or workstation with insane speeds up to 7,300 MB/s² [1TB - 4TB models].
- MORE ROOM, MORE GAMES. Capacities up to 8TB¹ mean you get to download more games - and stop deleting your favorites.
- HEATSINK FOR THE WIN. All capacities have an optional heatsink version to help maintain peak performance through your most intense gaming sessions.
- DO MORE WITH DASHBOARD. The downloadable SANDISK® Dashboard [Windows® only] monitors your drive's health, lets you customize your RGB lighting [heatsink versions only], and can automatically detect games to turn on Game Mode 2.0.
- FUTURE-FORWARD FEATURES. The WD_BLACK™ SN850X SSD boasts a powerful suite of features, including Predictive Loading, Overhead Balancing, and Adaptive Thermal Management [ATM].³
- DIRECTSTORAGE SUPPORT. Improve load times and get precious time back with Microsoft® DirectStorage technology.

WD_
BLACK™



PRODUCT FEATURES

GAIN THE ULTIMATE GAMING EDGE

Insane speeds up to 7,300MB/s² [1TB - 4TB models] deliver top-tier performance with ridiculously short load times - for the elite gaming experience you've been waiting for.

HEATSINK FOR THE WIN

All capacities have an optional heatsink version that's not only eye-catching, but also helps your rig maintain peak performance through your most intense gaming sessions.

MORE ROOM FOR MORE GAMES

Capacities up to 8TB¹ mean you get to keep more games at the ready - and get into the action even faster.

DO MORE WITH SANDISK® DASHBOARD

The downloadable SANDISK® Dashboard [Windows® only] monitors your drive's health, lets you customize your RGB lighting, and, exclusively on the SN850X SSD, enables Game Mode 2.0 to transform your gaming experience.

FUTURE-FORWARD FEATURES

The WD_BLACK™ SN850X SSD boasts a powerful suite of features, including Predictive Loading, Overhead Balancing, and Adaptive Thermal Management [ATM].³

DIRECTSTORAGE SUPPORTED

Improve load times and get precious time back with Microsoft® DirectStorage technology.

PRODUCT SPECIFICATIONS				
CAPACITIES ¹ :	8TB	4TB	2TB	1TB
MODELS WITH HEATSINK:	WDS800T2XHE	WDS400T2XHE	WDS200T2XHE	WDS100T2XHE
MODELS WITHOUT HEATSINK:	WDS800T2X0E	WDS400T2X0E	WDS200T2X0E	WDS100T2X0E
INTERFACE ⁴	PCIe® GEN4 16GT/S, UP TO 4 LANES			
NAND	SANDISK® TLC 3D NAND			
PERFORMANCE ²				
Sequential Read [up to]	7,200MB/s	7,300MB/s	7,300MB/s	7,300MB/s
Sequential Write [up to]	6,600MB/s	6,600MB/s	6,600MB/s	6,300MB/s
Random Read [up to]	1,200K IOPS	1,200K IOPS	1,200K IOPS	800K IOPS
Random Write [up to]	1,200K IOPS	1,100K IOPS	1,100K IOPS	1,100K IOPS
ENDURANCE ⁵ [TBW]	4,800	2,400	1,200	600
DIMENSIONS	Length:	Width:	Height:	Weight:
1 & 2TB MODELS WITHOUT HEATSINK:	80 ± 0.15mm	22 ± 0.15mm	2.38mm	7.5G ± 1g
4 & 8TB MODELS WITHOUT HEATSINK:	80 ± 0.15mm	22 ± 0.15mm	3.88mm	8.6G ± 1g
1 & 2TB MODELS WITH HEATSINK:	80 ± 0.20mm	23.40 ± 0.40mm	8.90 ± 0.40mm	24G ± 3g
4 & 8TB MODELS WITH HEATSINK:	80 ± 0.20mm	24.46 ± 0.48mm	10.31 ± 0.50mm	30.4G ± 3g
SECURITY SPECIFICATIONS	TCG OPAL V2.01			
SYSTEM COMPATIBILITY	Computer with M.2 [M-key] port, capable of taking M.2 2280 form factor Windows® 10+ PlayStation®5 [Heatsink model only]			
LIMITED WARRANTY ⁶	5 Years			
RoHS COMPLIANCE	Yes			
OPERATING TEMPERATURE ⁷	32°F TO 185°F [0°C TO 85°C]			
NON OPERATING TEMPERATURE ⁸	-40°F TO 185°F [-40°C TO 85°C]			

¹ 1TB = 1 trillion bytes. Actual user capacity may be less depending on operating environment.

² Based on read speed, unless otherwise stated. 1 MB/s = 1 million bytes per second. Based on internal testing; performance may vary depending upon host device, usage conditions, drive capacity and other factors.

³ Requires the downloadable WD_BLACK™ Dashboard [Windows® only].

⁴ PCIe® Gen4 storage technology requires a compatible motherboard. Backwards compatible with PCIe® Gen3 x4, PCIe® Gen3 x2, PCIe® Gen3 x1, PCIe® Gen2 x4, PCIe® Gen2 x2 and PCIe® Gen2 x1.

⁵ TBW [terabytes written] values calculated using JEDEC client workload [JESD219] and vary by product capacity.

⁶ 5 years or Max Endurance [TBW] limit, whichever occurs first. See support.wdc.com for region-specific warranty details.

⁷ Operational temperature is defined as temperature reported by the drive. Note that drive temperature readings are expected to be higher than ambient temperature when the SSD is placed inside a system. The SSD box package is rated up to 60°C.

⁸ Non-operational storage temperature does not guarantee data retention.

SANDISK™

July 2025

951 Sandisk Drive
Milpitas, CA 95035, USA
www.sandisk.com

SANDISK, the SANDISK logo and nCache are registered trademarks or trademarks of Sandisk Corporation or its affiliates in the U.S. and/or other countries. WD_BLACK and the WD_BLACK logo are registered trademarks or trademarks of Western Digital Corporation or its affiliates in the U.S. and/or other countries. The NVMe word mark is a trademark of NVM Express, Inc. PCIe® is a registered trademark of PCI-SIG. Windows and Microsoft are registered trademarks or trademarks of the Microsoft group of companies. All other marks are the property of their respective owners. Product specifications subject to change without notice. Pictures shown may vary from actual products.
©2025 Sandisk Corporation or its affiliates. All rights reserved.