

NLCV25T-3R3M-EFR

Product Status	Production
Applications	Commercial Grade
No Directivity	No Directivity
Feature	Wire Wound Ferrite Core
Series Type	NLCV25-EFR
Brand	TDK
Environmental Compliance	 RoHS  REACH  Halogen Free  Lead Free



Size	
Length(L)	2.50mm ± 0.20 mm
Width(W)	2.00mm ± 0.10 mm
Thickness Height	1.80mm ± 0.10 mm
Recommended Land Pattern (A)	1.00mm Nom.
Recommended Land Pattern (B)	1.50mm Nom.
Recommended Land Pattern (C)	1.50mm Nom.

Electrical Characteristics	
Inductance	3.3 μ H $\pm 20\%$ at 7.96MHz
Rated Current	570mA
DC Resistance [Typ.]	440m Ω
DC Resistance [Max.]	528m Ω
Self Resonant Frequency [Min.]	54MHz
Self Resonant Frequency [Typ.]	
Q [Min.]	
Q [Typ.]	10 at 7.96MHz

Other	
Operating Temp. Range	-40 to 125°C (Including Self-Temp. Rise)
Soldering Method	Wave (Flow) Reflow Iron Soldering
AEC-Q200	NO
Packing	Embossed (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs
Weight	0.025g







! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

NLCV25T-3R3M-EFR

Characteristic Graphs (This is reference data, and does not guarantee the products characteristics.)

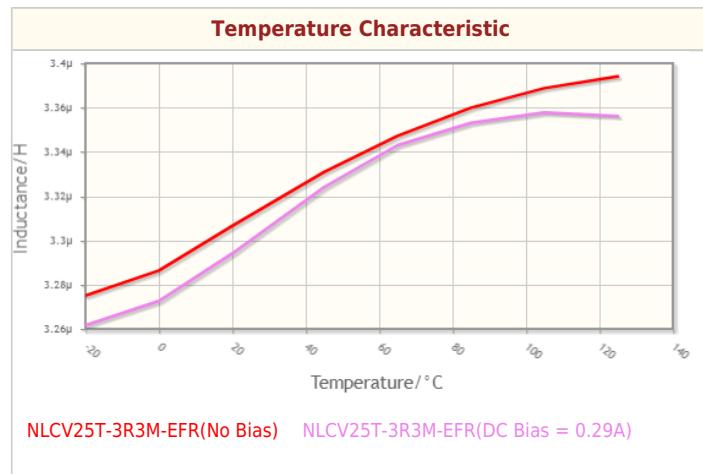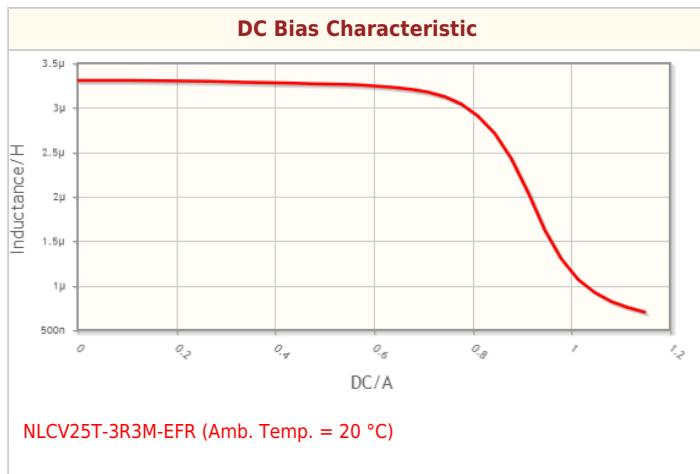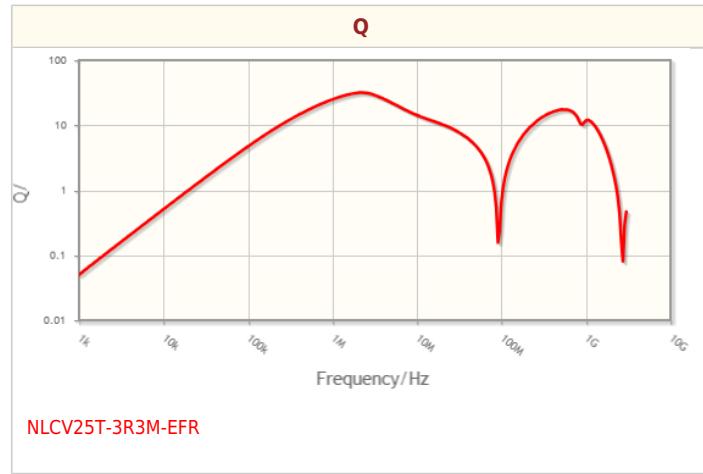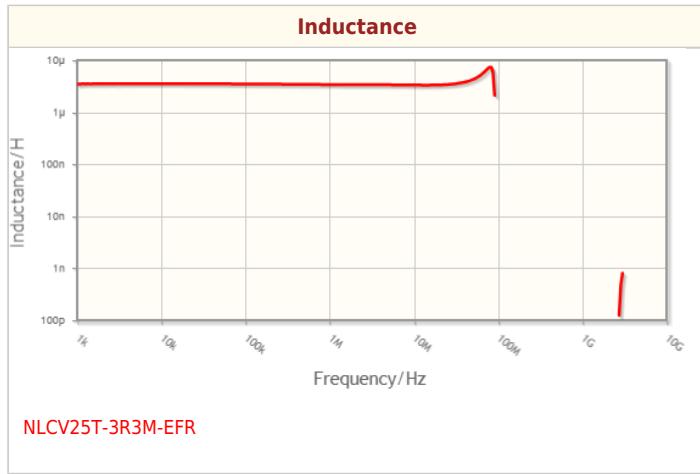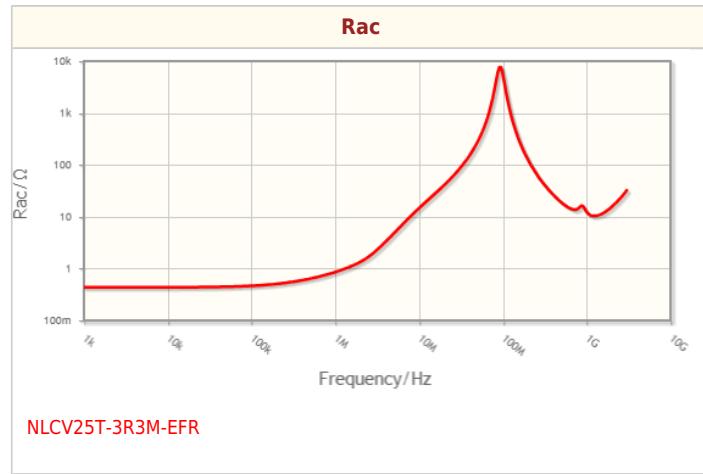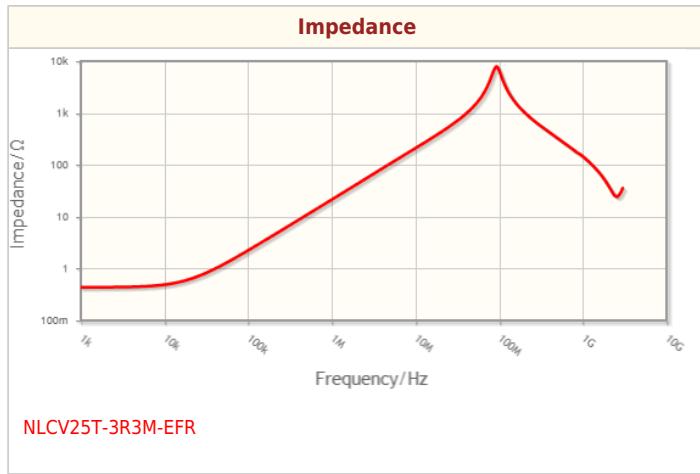


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.



! All specifications are subject to change without notice.

Characteristic Graphs (This is reference data, and does not guarantee the products characteristics.)

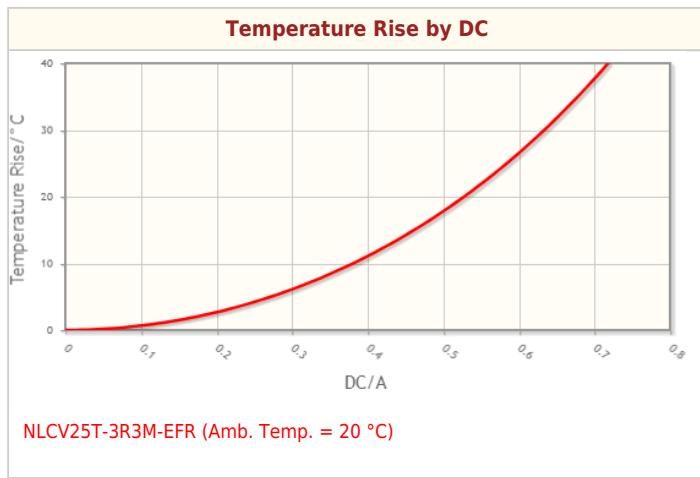

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

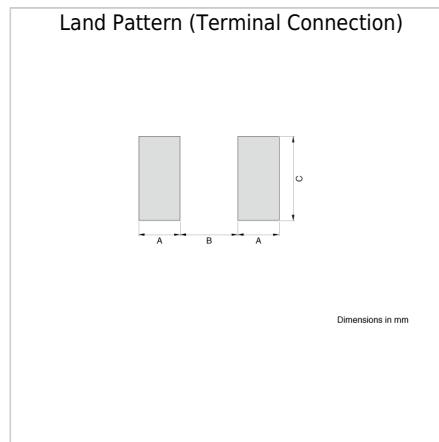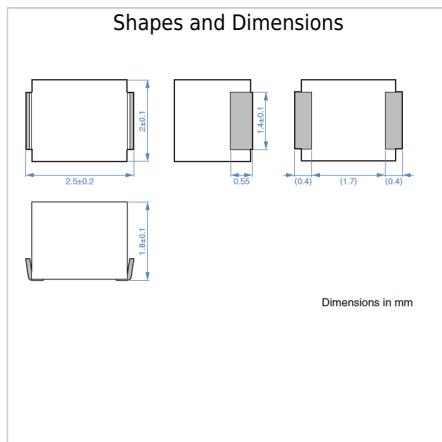

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.