



# SMCJ series

## 1500 W Transient Voltage Suppressor

11 October 2024

Product data sheet

### 1. General description

1500 W uni- and bi-directional Transient Voltage Suppressor (TVS) in a SMC Surface-Mounted Device (SMD) plastic package, designed for transient voltage protection.

### 2. Features and benefits

- Rated peak pulse power at 10/1000  $\mu$ s waveform:  $P_{PPM} = 1500$  W
- Reverse standoff voltage:  $V_{RWM} = 7$  V to 220 V
- Reverse current:  $I_R$  less than 1  $\mu$ A for  $V_{RWM} \geq 11$ V
- Excellent clamping capability
- Small plastic package suitable for surface-mounted design

### 3. Applications

- Power supply protection
- Power management
- Telecom, Computer, Industrial and Consumer electronics application

### 4. Quick reference data



Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
$V_{RWM}$	reverse standoff voltage	$T_{amb} = 25$ °C		7	-	220	V
$P_{PPM}$	rated peak pulse power	$t_p = 10/1000$ $\mu$ s; $T_{amb} = 25$ °C	[1]	-	-	1500	W

[1] In accordance with IEC 61643-321 (10/1000  $\mu$ s current waveform).

5. Pinning information

Table 2. Pinning information

Pin	Description uni-directional	Description bi-directional	Simplified outline	Graphic symbol
1	cathode [1] [2]	cathode 1	 SMC (SOD1003-1)	
2	anode	cathode 2		

- [1] The marking bar indicates the cathode for uni-directional device.  
[2] Marking bar is used for uni-directional device only.

6. Ordering information

Table 3. Ordering information

Type number[1]	Package		
	Name	Description	Version
SMCJ series	SMC	plastic, surface mounted package; 2 terminals; 6.86 mm x 6.11 mm x 2.34 mm body	SOD1003-1

- [1] The series consists of 92 types with reverse standoff voltages from 7 V to 220 V.

7. Marking

Table 4. Marking codes

Type number	Marking code	Type number	Marking code
SMCJ7.0A	AAA2	SMCJ7.0CA	AFA8
SMCJ7.5A	AAA3	SMCJ7.5CA	AFA9
SMCJ8.0A	AAA4	SMCJ8.0CA	AGA2
SMCJ8.5A	AAA5	SMCJ8.5CA	AGA3
SMCJ9.0A	AAA6	SMCJ9.0CA	AGA4
SMCJ10A	AAA7	SMCJ10CA	AGA5
SMCJ11A	AAA8	SMCJ11CA	AGA6
SMCJ12A	AAA9	SMCJ12CA	AGA7
SMCJ13A	ABA2	SMCJ13CA	AGA8
SMCJ14A	ABA3	SMCJ14CA	AGA9
SMCJ15A	ABA4	SMCJ15CA	AHA2
SMCJ16A	ABA5	SMCJ16CA	AHA3
SMCJ17A	ABA6	SMCJ17CA	AHA4
SMCJ18A	ABA7	SMCJ18CA	AHA5
SMCJ20A	ABA8	SMCJ20CA	AHA6
SMCJ22A	ABA9	SMCJ22CA	AHA7
SMCJ24A	ACA2	SMCJ24CA	AHA8
SMCJ26A	ACA3	SMCJ26CA	AHA9
SMCJ28A	ACA4	SMCJ28CA	AJA2

Type number	Marking code	Type number	Marking code
SMCJ30A	ACA5	SMCJ30CA	AJA3
SMCJ33A	ACA6	SMCJ33CA	AJA4
SMCJ36A	ACA7	SMCJ36CA	AJA5
SMCJ40A	ACA8	SMCJ40CA	AJA6
SMCJ43A	ACA9	SMCJ43CA	AJA7
SMCJ45A	ADA2	SMCJ45CA	AJA8
SMCJ48A	ADA3	SMCJ48CA	AJA9
SMCJ51A	ADA4	SMCJ51CA	AKA2
SMCJ54A	ADA5	SMCJ54CA	AKA3
SMCJ58A	ADA6	SMCJ58CA	AKA4
SMCJ60A	ADA7	SMCJ60CA	AKA5
SMCJ64A	ADA8	SMCJ64CA	AKA6
SMCJ70A	ADA9	SMCJ70CA	AKA7
SMCJ75A	AEA2	SMCJ75CA	AKA8
SMCJ78A	AEA3	SMCJ78CA	AKA9
SMCJ85A	AEA4	SMCJ85CA	ALA2
SMCJ90A	AEA5	SMCJ90CA	ALA3
SMCJ100A	AEA6	SMCJ100CA	ALA4
SMCJ110A	AEA7	SMCJ110CA	ALA5
SMCJ120A	AEA8	SMCJ120CA	ALA6
SMCJ130A	AEA9	SMCJ130CA	ALA7
SMCJ150A	AFA2	SMCJ150CA	ALA8
SMCJ160A	AFA3	SMCJ160CA	ALA9
SMCJ170A	AFA4	SMCJ170CA	AMA2
SMCJ180A	AFA5	SMCJ180CA	AMA3
SMCJ200A	AFA6	SMCJ200CA	AMA4
SMCJ220A	AFA7	SMCJ220CA	AMA5

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
P <sub>PPM</sub>	rated peak pulse power	t <sub>p</sub> = 10/1000 µs	[1]	-	1500	W
I <sub>PPM</sub>	rated peak pulse current	t <sub>p</sub> = 10/1000 µs	[1]	-	see table 8	A
T <sub>j</sub>	junction temperature			-	150	°C
T <sub>amb</sub>	ambient temperature			-55	150	°C
T <sub>stg</sub>	storage temperature			-55	150	°C

[1] In accordance with IEC 61643-321 (10/1000 µs current waveform).


Table 6. ESD maximum ratings

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
V <sub>ESD</sub>	electrostatic discharge voltage	IEC 61000-4-2; contact discharge; T <sub>amb</sub> = 25°C	[1]	-	30	kV

[1] Device stressed with ten non-repetitive ESD pulses.

Table 7. ESD standards compliance

Standard	
Per diode	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4kV

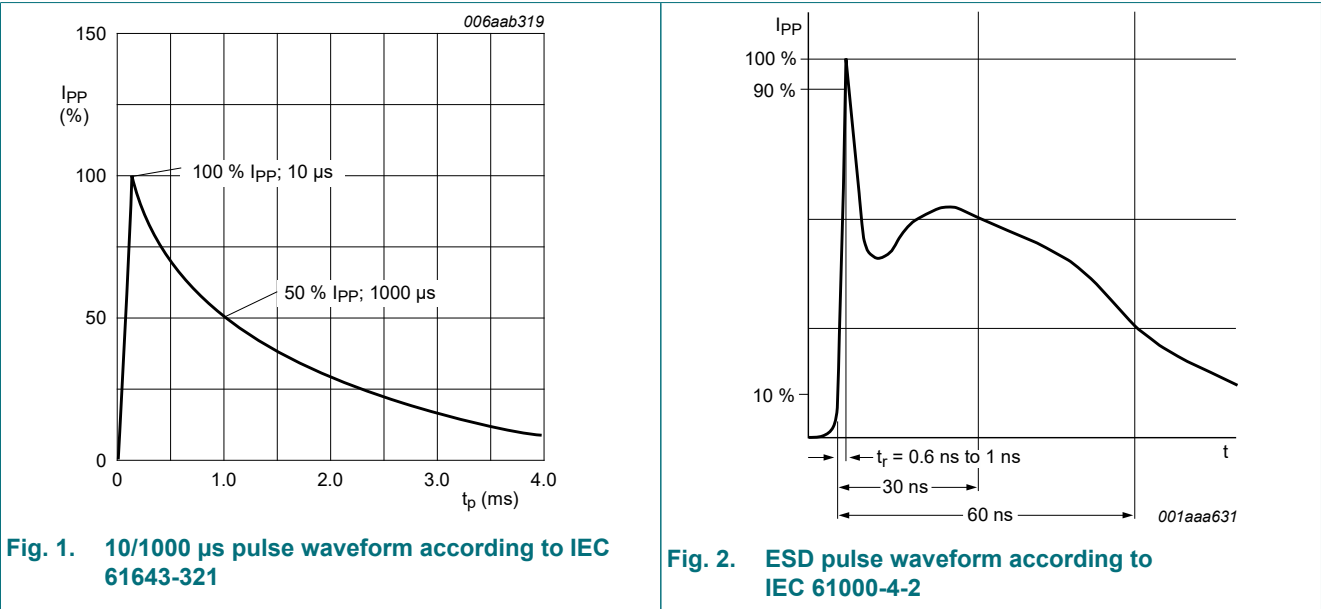



9. Characteristics

Table 8. Characteristics per type; SMCJ7.0(C)A to SMCJ220(C)A




T<sub>amb</sub> = 25°C unless otherwise specified.

Type number		Reverse standoff voltage V <sub>RWM</sub> (V)	Breakdown voltage V <sub>BR</sub> (V) at test current I <sub>T</sub>			Reverse leakage current I <sub>RM</sub> at V <sub>RWM</sub> (µA)	Test current I <sub>T</sub> (mA)	Clamping voltage V <sub>CL</sub> (V)	
uni-directional	bi-directional	Max	Min	Typ	Max	Max		Max	I <sub>PPM</sub> (A)
SMCJ7.0A	SMCJ7.0CA	7.0	7.78	8.19	8.60	200/400	10	12.0	125.0
SMCJ7.5A	SMCJ7.5CA	7.5	8.33	8.77	9.21	100/200	1	12.9	116.3
SMCJ8.0A	SMCJ8.0CA	8.0	8.89	9.36	9.83	50/100	1	13.6	110.3
SMCJ8.5A	SMCJ8.5CA	8.5	9.44	9.92	10.40	20/40	1	14.4	104.2
SMCJ9.0A	SMCJ9.0CA	9.0	10.00	10.55	11.10	10/20	1	15.4	97.4
SMCJ10A	SMCJ10CA	10	11.10	11.70	12.30	5/10	1	17.0	88.3
SMCJ11A	SMCJ11CA	11	12.20	12.85	13.50	1	1	18.2	82.5
SMCJ12A	SMCJ12CA	12	13.30	14.00	14.70	1	1	19.9	75.4
SMCJ13A	SMCJ13CA	13	14.40	15.15	15.90	1	1	21.5	69.8
SMCJ14A	SMCJ14CA	14	15.60	16.40	17.20	1	1	23.2	64.7
SMCJ15A	SMCJ15CA	15	16.70	17.60	18.50	1	1	24.4	61.5
SMCJ16A	SMCJ16CA	16	17.80	18.75	19.70	1	1	26.0	57.7
SMCJ17A	SMCJ17CA	17	18.90	19.90	20.90	1	1	27.6	54.4
SMCJ18A	SMCJ18CA	18	20.00	21.05	22.10	1	1	29.2	51.4
SMCJ20A	SMCJ20CA	20	22.20	23.35	24.50	1	1	32.4	46.3
SMCJ22A	SMCJ22CA	22	24.40	25.65	26.90	1	1	35.5	42.3
SMCJ24A	SMCJ24CA	24	26.70	28.10	29.50	1	1	38.9	38.6
SMCJ26A	SMCJ26CA	26	28.90	30.40	31.90	1	1	42.1	35.7
SMCJ28A	SMCJ28CA	28	31.10	32.75	34.40	1	1	45.4	33.1
SMCJ30A	SMCJ30CA	30	33.30	35.05	36.80	1	1	48.4	31.0
SMCJ33A	SMCJ33CA	33	36.70	38.65	40.60	1	1	53.3	28.2
SMCJ36A	SMCJ36CA	36	40.00	42.10	44.20	1	1	58.1	25.9
SMCJ40A	SMCJ40CA	40	44.40	46.75	49.10	1	1	64.5	23.3
SMCJ43A	SMCJ43CA	43	47.80	50.30	52.80	1	1	69.4	21.7
SMCJ45A	SMCJ45CA	45	50.00	52.65	55.30	1	1	72.7	20.6
SMCJ48A	SMCJ48CA	48	53.30	56.10	58.90	1	1	77.4	19.4
SMCJ51A	SMCJ51CA	51	56.70	59.70	62.70	1	1	82.4	18.2
SMCJ54A	SMCJ54CA	54	60.00	63.15	66.30	1	1	87.1	17.3
SMCJ58A	SMCJ58CA	58	64.40	67.80	71.20	1	1	93.6	16.1
SMCJ60A	SMCJ60CA	60	66.70	70.20	73.70	1	1	96.8	15.5
SMCJ64A	SMCJ64CA	64	71.10	74.85	78.60	1	1	103.0	14.6
SMCJ70A	SMCJ70CA	70	77.80	81.90	86.00	1	1	113.0	13.3
SMCJ75A	SMCJ75CA	75	83.20	87.65	92.10	1	1	121.0	12.4
SMCJ78A	SMCJ78CA	78	86.70	91.25	95.80	1	1	126.0	11.9
SMCJ85A	SMCJ85CA	85	94.40	99.20	104.0	1	1	137.0	11.0
SMCJ90A	SMCJ90CA	90	100.0	105.5	111.0	1	1	146.0	10.3

Type number		Reverse standoff voltage $V_{RWM}$ (V)	Breakdown voltage $V_{BR}$ (V) at test current $I_T$			Reverse leakage current $I_{RM}$ at $V_{RWM}$ ( $\mu A$ )	Test current $I_T$ (mA)	Clamping voltage $V_{CL}$ (V)	
uni-directional	bi-directional	Max	Min	Typ	Max	Max		Max	$I_{PPM}$ (A)
SMCJ100A	SMCJ100CA	100	111.0	117.0	123.0	1	1	162.0	9.3
SMCJ110A	SMCJ110CA	110	122.0	128.5	135.0	1	1	177.0	8.5
SMCJ120A	SMCJ120CA	120	133.0	140.0	147.0	1	1	193.0	7.8
SMCJ130A	SMCJ130CA	130	144.0	151.5	159.0	1	1	209.0	7.2
SMCJ150A	SMCJ140CA	150	167.0	176.0	185.0	1	1	243.0	6.2
SMCJ160A	SMCJ160CA	160	178.0	187.5	197.0	1	1	259.0	5.8
SMCJ170A	SMCJ170CA	170	189.0	199.0	209.0	1	1	275.0	5.5
SMCJ180A	SMCJ180CA	180	201.0	211.5	222.0	1	1	292.0	5.1
SMCJ200A	SMCJ200CA	200	224.0	235.5	247.0	1	1	324.0	4.6
SMCJ220A	SMCJ220CA	220	246.0	259.0	272.0	1	1	356.0	4.2

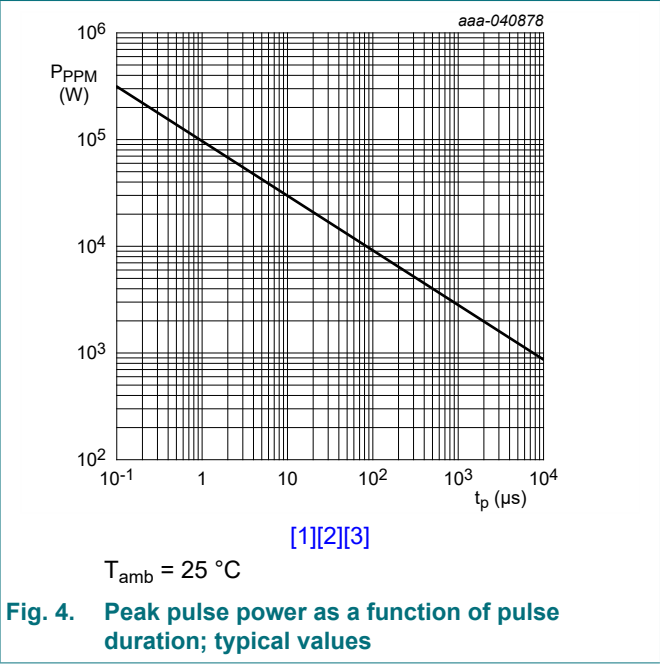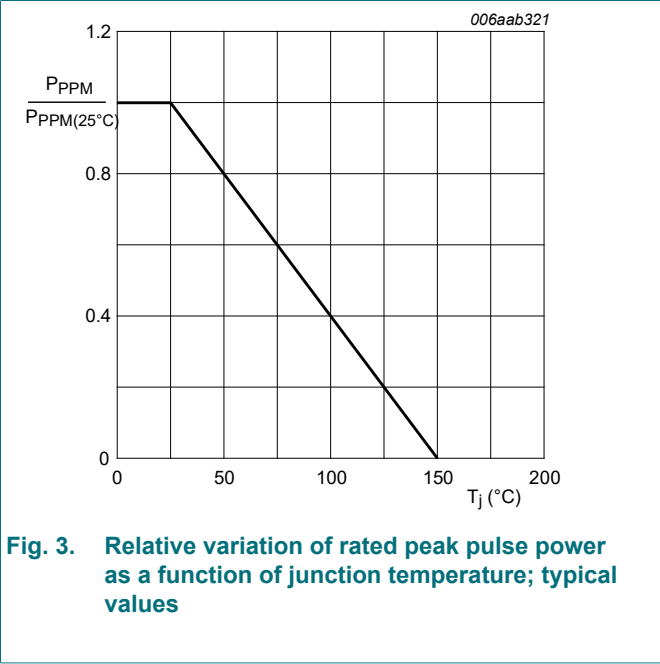

[1] Peak pulse power derating curve derived from typical measured values using 8/20  $\mu s$  and 10/1000  $\mu s$  waveforms.  
[2] In accordance with IEC 61000-4-5 (8/20  $\mu s$  waveforms).  
[3] In accordance with IEC 61643-321 (10/1000  $\mu s$  waveforms).

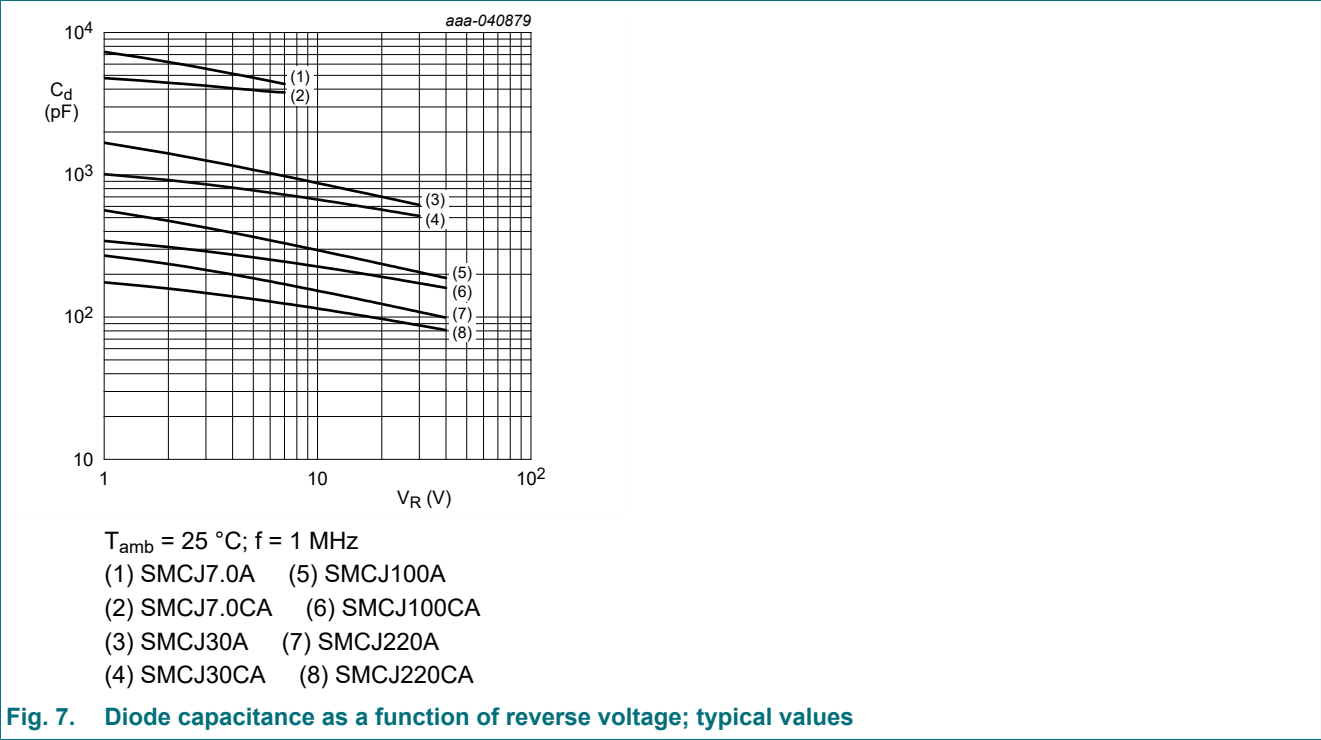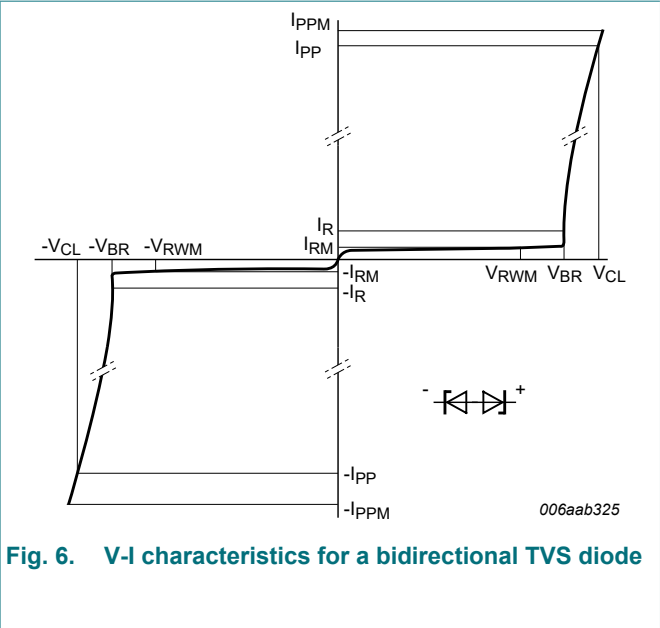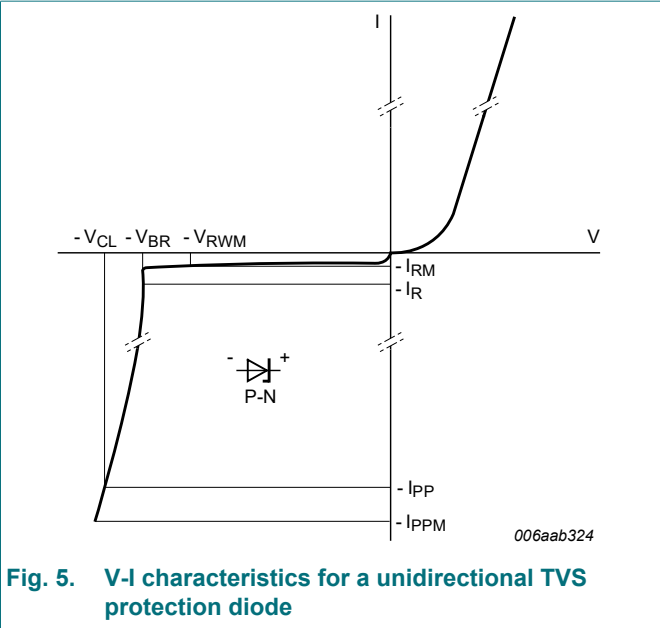

10. Package outline

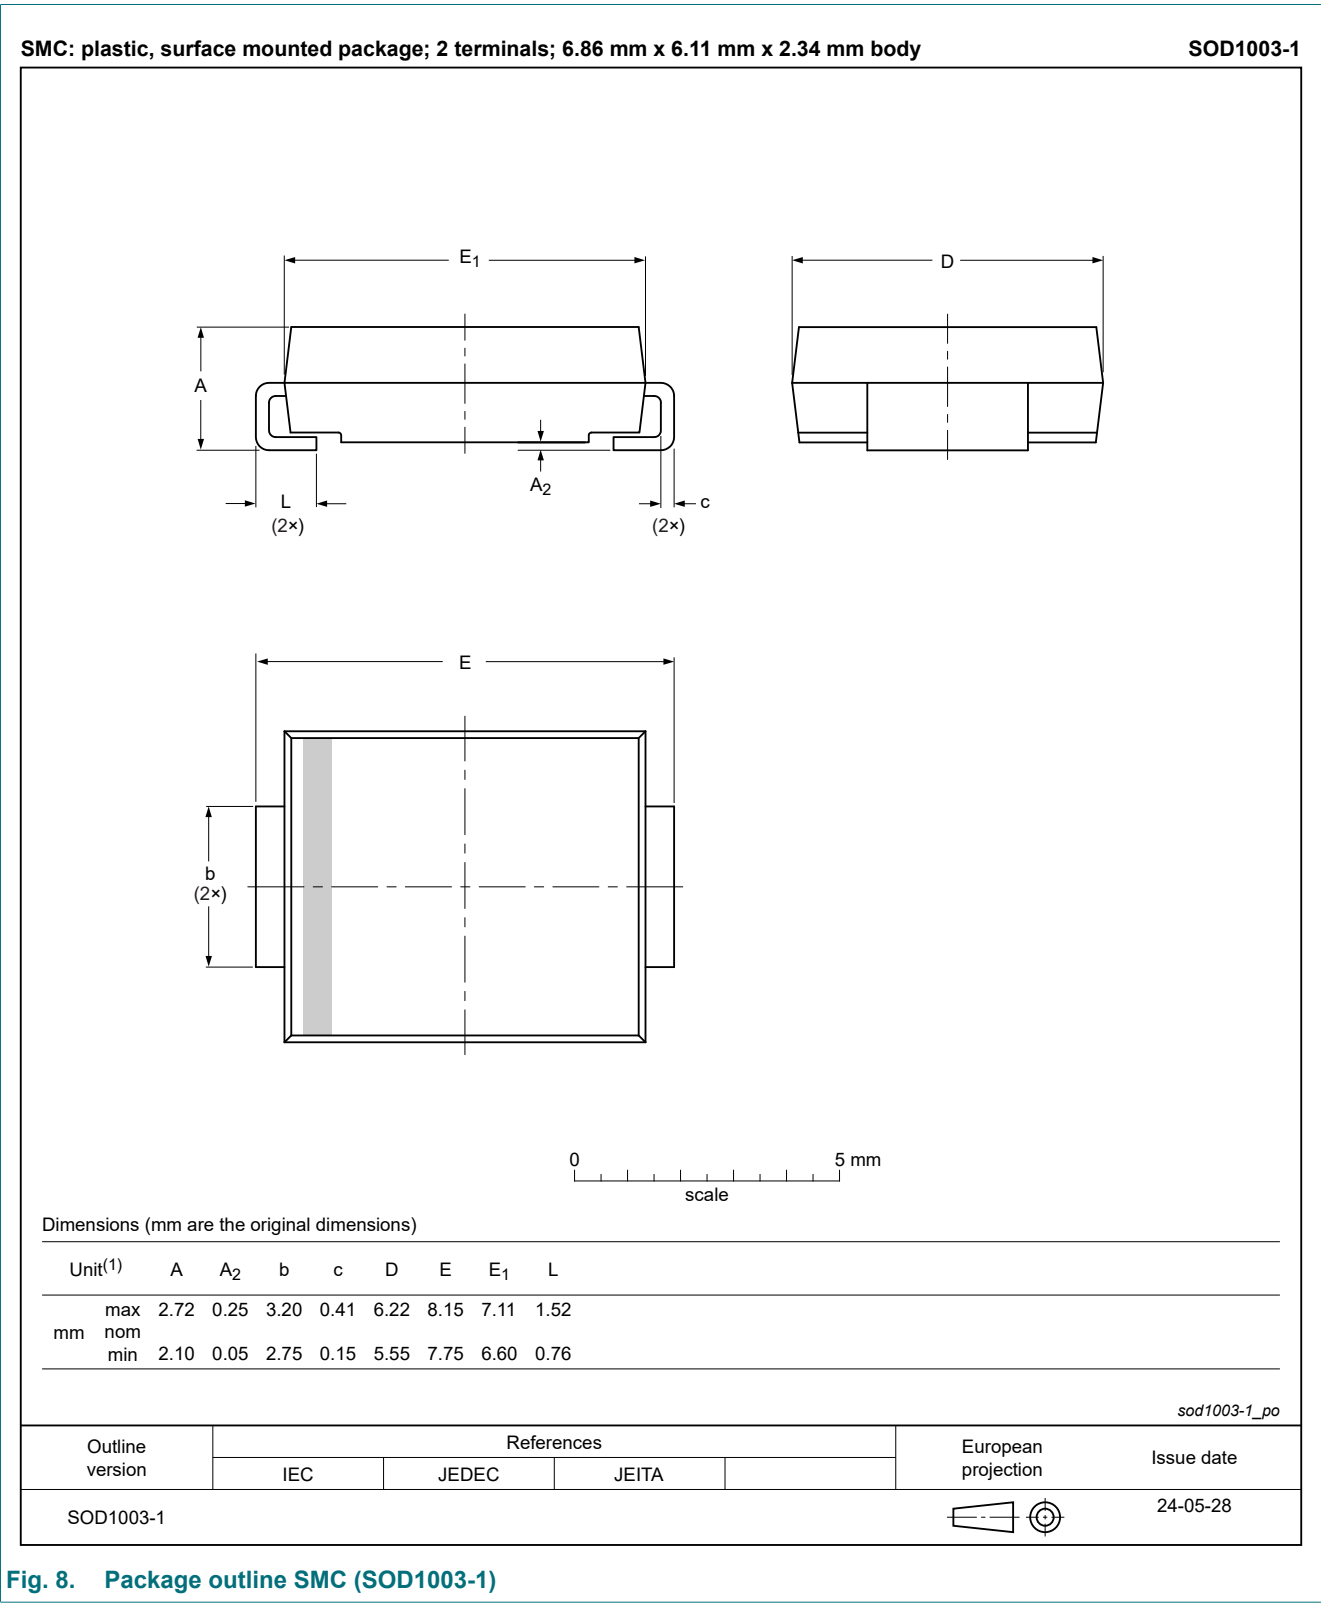


Fig. 8. Package outline SMC (SOD1003-1)



11. Soldering

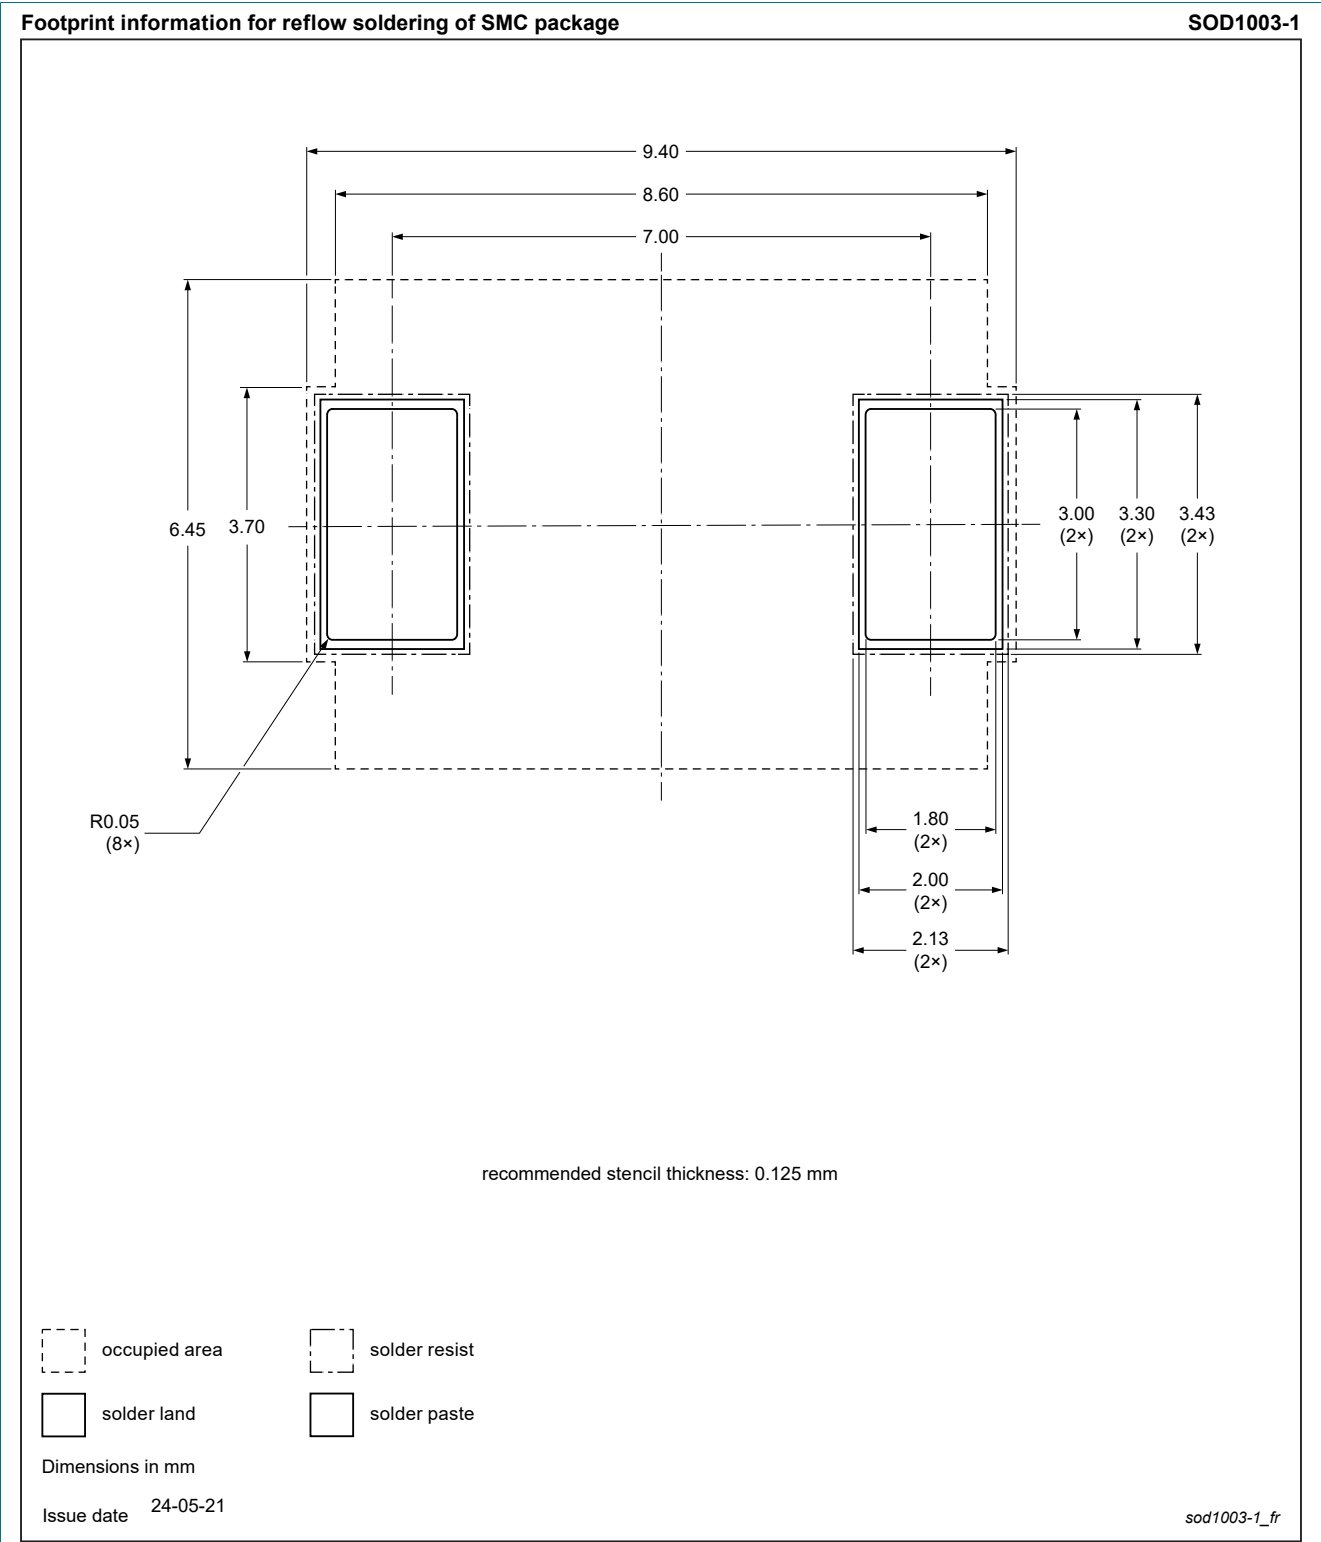


Fig. 9. Reflow soldering footprint for SMC (SOD1003-1)

12. Revision history

Table 9. Revision history

Data sheet ID	Release date	Data sheet status	Change notice	Supersedes
SMCJ_SER v.1	20241011	Product data sheet	-	-

13. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1. General description..... 1

2. Features and benefits..... 1

3. Applications..... 1

4. Quick reference data..... 1

5. Pinning information.....2

6. Ordering information.....2

7. Marking.....2

8. Limiting values..... 4

9. Characteristics.....5

10. Package outline..... 8

11. Soldering..... 9

12. Revision history.....10

13. Legal information.....11

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 11 October 2024