
MBC300 Series

AC-DC Open Frame Power Supplies
Medical

Not For New Design
Please refer to exact equivalent product series
MWLT300

NOT FOR NEW DESIGN

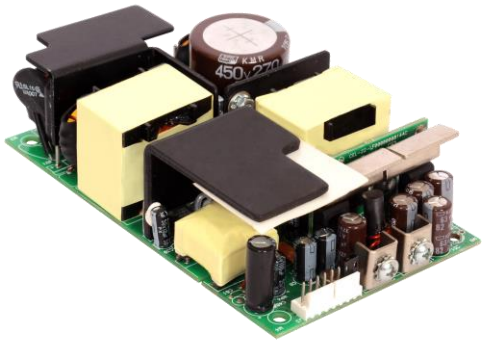

The MBC300 Series of open-frame medical power supplies, with its wide universal 90-264 VAC input range, is available at 300 W of output power and a variety of single output voltages.

The MBC series is designed and approved to the latest Medical standards (EN/IEC 60601-1), providing 2 x MOPP (Means of Patient Protection) isolation for Class I & Class II applications.

These medical power supplies are ideal for monitoring, home health equipment as well as surgical devices.

RoHS Compliant

Key Features & Benefits

- 5.0 x 3.0 x 1.5 in (127.0 x 76.2 x 38.1 mm)
- Approved to EN/IEC 60601-1
- 2x MOPP
- 12 V fan output
- 5 V standby output
- IEC Protection Class Options:
  - Class I: Earth pin J4 (no suffix)
  - Class II: No Earth pin (-2 suffix)
- EMI Class B
- Medical Safety Agency Approvals
- RoHS Compliant
- CE marked

Applications

- Diagnostic
- Drug Pump
- Dialysis
- Home Health Care
- Monitoring
- Imaging

bel POWER SOLUTIONS & PROTECTION
a bel group

belfuse.com/power-solutions

Please read our datasheet & drawing disclaimer here.

Downloaded from Arrow.com.

1. MODEL SELECTION

MODEL [1]	CONNECTOR	OUTPUT VOLTAGE	MAX LOAD		MINIMUM LOAD	RIPPLE & NOISE [2]	POWER
			CONVECTION	300 LFM			
MBC300-1T05G	Screw Terminal	5 VDC	28.0 A	40.0 A	0.0 A	2%	200 W
MBC300-1T12G	Screw Terminal	12 VDC	16.67 A	25.0 A	0.0 A	2%	300 W
MBC300-1T15G	Screw Terminal	15 VDC	13.33 A	20.0 A	0.0 A	2%	300 W
MBC300-1T24G	Screw Terminal	24 VDC	8.33 A	13.54 A	0.0 A	2%	325 W
MBC300-1T30G	Screw Terminal	30 VDC	6.67 A	10.83 A	0.0 A	2%	325 W
MBC300-1T48G	Screw Terminal	48 VDC	4.17 A	6.77 A	0.0 A	2%	325 W
Cover-300-XBC [3]	Metal cover kit accessory						

[1] Class II means without input Earth pin. Add suffix "-2" at the end of the Model Number to order Class II version.
[2] Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Electrolytic capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
[3] When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input Voltage	Universal	90 – 264 VAC / 120 – 390 VDC
Input Frequency		47 to 63 Hz
Input Current	120 VAC 230 VAC	3.2 A max 1.65 A max
Inrush Current	120 VAC 230 VAC	35 A max 65 A max
Leakage Current	120 VAC 230 VAC	< 125 µA < 250 µA
Switching Frequency	PFC converter (fixed) Resonant converter (variable)	80 kHz typical 35 to 250 kHz, 90 kHz typical

NOT FOR NEW DESIGN

Downloaded from Arrow.com.

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION		SPECIFICATION
Output Voltage [4]			12 to 48 V
Stand-by Output 5			5 VDC
Output Power [6, 7]	Derate linearly to 80% from 90 VAC to 80 VAC input.		200 to 325 W
Efficiency	120 VAC 230 VAC		88% typical 92% typical
Hold Up Time	120 / 230 VAC		10 ms
Power Factor	120 VAC 230 VAC		0.98 0.95
Line Regulation			± 0.5 %
Load Regulation			± 2 %
Transient Response	50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/µs,		< 10 %, recovery time < 5 ms
Rise Time			< 100 ms
Set Point Tolerance			± 1 %
Voltage Output Adjustment			± 3 %
Over Voltage Protection	Automatic recovery		110 to 150 %
Over Current Protection			110 to 150 %
Short Circuit Protection	Short term, automatic recovery		
Over Temperature Protection	Automatic Recovery		110° C primary heat sink
Cooling [8]	Convection	5 V model 12, 15, 24, 30 & 48 V models	140 W max 200 W max
	With 300 LFM	5 V model 12 &15 V models 24, 30 & 48 V models	200 W max 300 W max 325 W max

4 Peak current rating on main output is 120% of max., lasting < 30 s with a maximum 10% duty cycle.
5 Standby output voltage tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.
6 Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.
7 Derate output power linearly to 80% from 90 VAC to 80 VAC input.
8 Refer de-rating curves to determine output power over the entire operating temperature range

4. EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Conducted Emissions [9]	EN 55011-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55011 B	Pass
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 4, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 4, Criterion A
Voltage Dips, Interruptions	EN 61000-4-11	Criterion A & B

9 Class II product meets Class A limit line for conducted emission.

NOT FOR NEW DESIGN

Downloaded from Arrow.com.

5. SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Isolation Voltage	Input to Output (2 MOPP) Input to Earth (1 MOPP) Output to Earth (1 MOPP)	4000 VAC 1500 VAC 500 VAC
Safety Standards	EN 60601-1, IEC 60601-1 (ed.3), ANSI / AAMI ES 60601 - 1, CSA C22.2 No. 60601-1	
Agency Approvals	Nemko	
CE mark	Complies with LVD Directive	

6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	Refer to de-rating curves -20 to 0°C start-up is guaranteed	-20 to 70°C
Storage Temperature		-40 to 85° C
Relative Humidity	Non Condensing	95% Rh
Altitude	Operating: Non-Operating:	10,000 ft. 40,000 ft.
Reliability	MTBF according to Telcordia –SR332-issue 3	1.77 million hours

7. SIGNALS

PARAMETER	DESCRIPTION / CONDITION
Power Good [10]	TTL signal goes high after main output is within regulation band, delay is 0.1 to 0.3 s
Remote On/ Off	To turn on PSU short remote pin to ground
Remote Sense	Compensates for 200 mV drop

[10] Power good signal cannot be used as a current source. Internal pull up resistor from PG signal to 5V is 10K. It is recommended to use external transistor if intended to source current.

8. CONNECTOR & PIN DESCRIPTION


CONNECTOR	PIN	DESCRIPTION / CONDITION	MANUFACTURER / PN
AC Input Connector	J1	Pin 1 AC LINE Pin 2 AC NEUTRAL	Molex: 26-60-4030 Mating: 09-50-3031; Pins: 08-50-0106
DC Output Connector	J2	Pin 1 RTN Pin 2 V1	6-32 inches Screw Pan HD Mating: Designed to accept Ring Tongue Terminal AMP : 8-31886-1, wherein one 16 AWG (max) wire can be crimped. Note: One Ring Tongue Terminal with 16 AWG is recommended for current up to 11 A only. Use multiple tongue terminals with wire for more current.
Signals & Aux Power	J3 [11]	Pin 1 REMOTE ON/OFF Pin 2 RTN Pin 3 VFAN (+12 V/0.5 A) Pin 4 -VE REMOTE SENSE Pin 5 VSTBY (+5 V/2 A, +/-5%) Pin 6 +VE REMOTE SENSE Pin 7 RTN Pin 8 POWER GOOD	Molex: 22-23-2081 Mating: 22-01-2087; Pins: 08-50-0113
Earth (Spade Connector)	J4 [12]		Molex: 19705-4301 Mating: 190030001

[11] PSU is supplied with J3 housing, pin-1 and pin-2 shorted to enable main output without remote on/off feature.
[12] Class I models only.

NOT FOR NEW DESIGN

Downloaded from Arrow.com.

9. DERATING CURVES

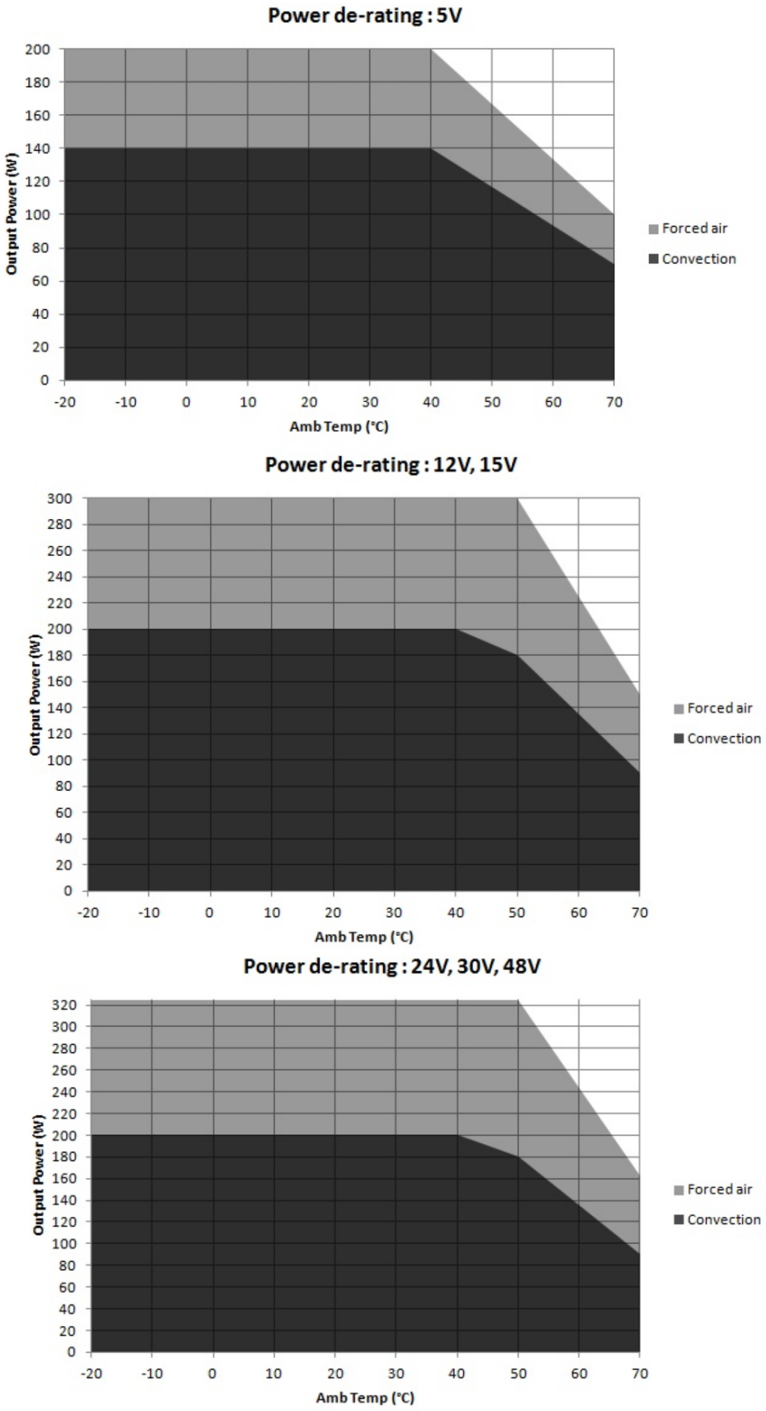

Forced air cooled load: 200 W up to 40°C
De-rate above 40 °C @ 1.67% per °C

Convection load: 140 W up to 40 °C
De-rate above 40 °C @ 1.67% per °C

Forced air cooled load: 300 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

Convection load: 200 W up to 40 °C
De-rate between 40-50 °C @ 1% per °C
De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 325 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

Convection load: 200 W up to 40 °C
De-rate between 40-50 °C @ 1% per °C
De-rate above 50 °C @ 2.5% per °C

Figure 1. Derating Curves

NEW DESIGN

© 2022 Bel Power Solutions & Protection

Downloaded from Arrow.com.

10. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	450 g (0.99 lbs)
Dimensions	127.0 x 76.2 x 38.1 mm (5.0 x 3.0 x 1.5 inch)

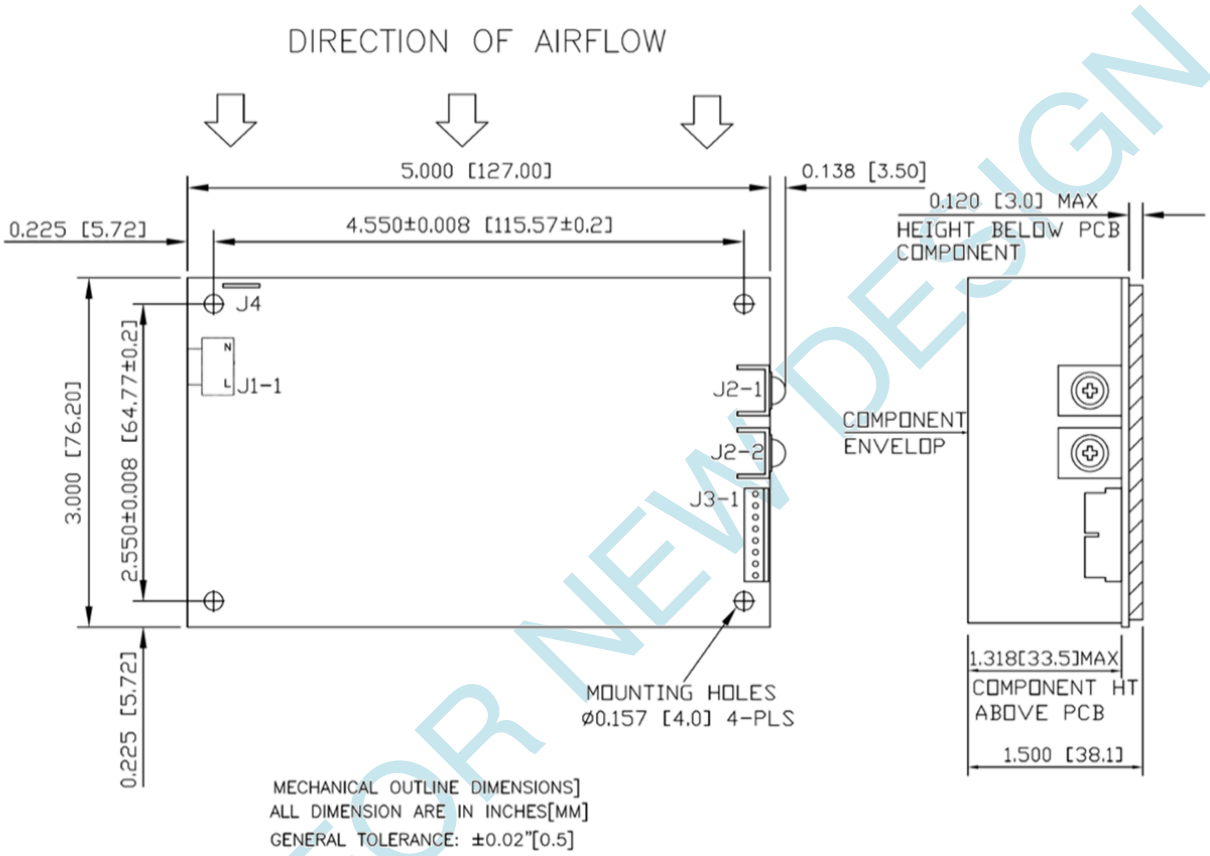


Figure 2. Mechanical Drawing

NOT FOR NEW DESIGN

Downloaded from Arrow.com.

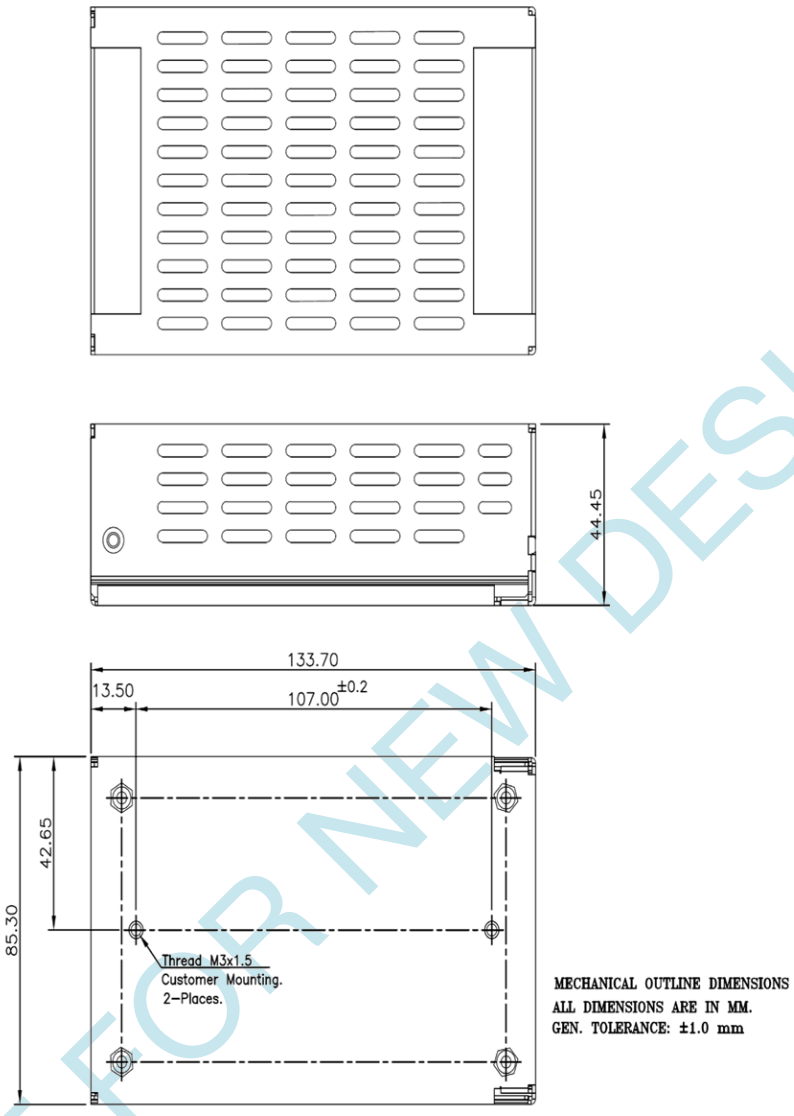


Figure 3. Mechanical Drawing with Cover Kit

NOTES: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

1 Stand off, used to mount PCB has OD of 5.4 mm max.
2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
3 Washer, if used, to have dia of 6.5 mm max.

NOT FOR NEW DESIGN

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

© 2022 Bel Power Solutions & Protection

Downloaded from Arrow.com.