P2

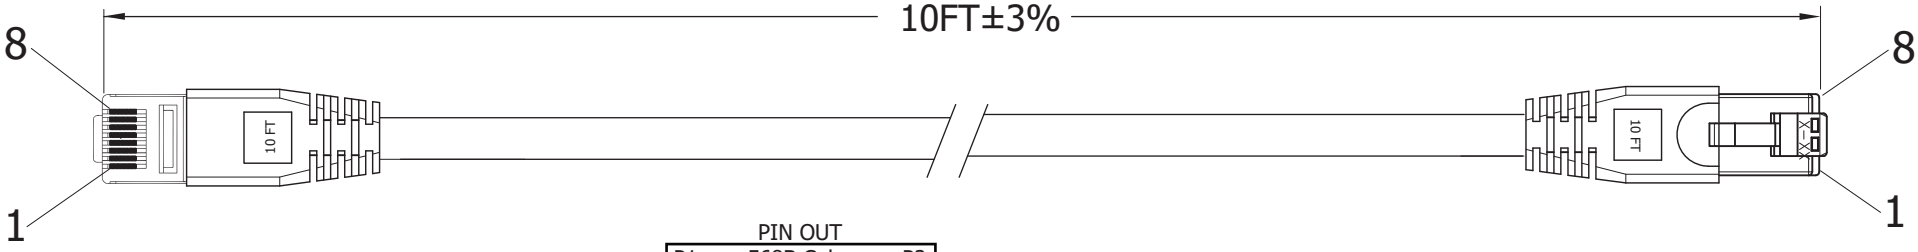

P1

PIN OUT

P1	568B Color	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8



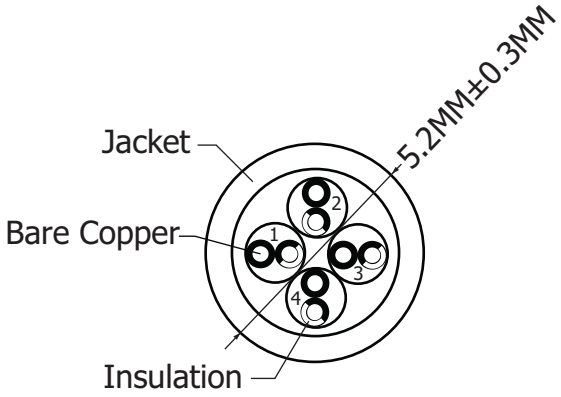

1	2	3	4
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN

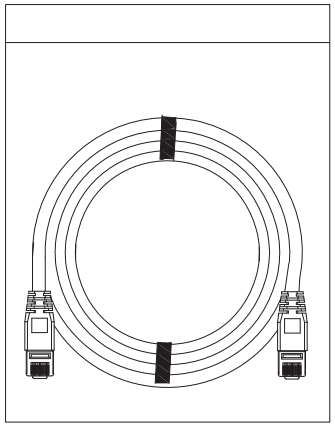

100 cables per carton

Material:

- 4X2, 24AWG, twisted pair, 7*0.19±0.15MM
  - OD: 5.2MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50µ”
- 568B Color wire standard
- Molded snaglass boot with strain relief
- Spot length on boot
- Connection 1:1

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	12.13.11	Chappell
Approved		

ASSMANN WSW components

Item No. DK-1511-010/G

Title Cat 5e Patch Cord - Unshielded, Booted, UTP, 24AWG, Contact Plating 50µ” of Gold, Grey, 10 Feet

Drawing No. **rev00**

Replace | Sheet

Downloaded from Arrow.com.