




[+ HARNESSING](#)
[HEAT SHRINK BOOTS](#)

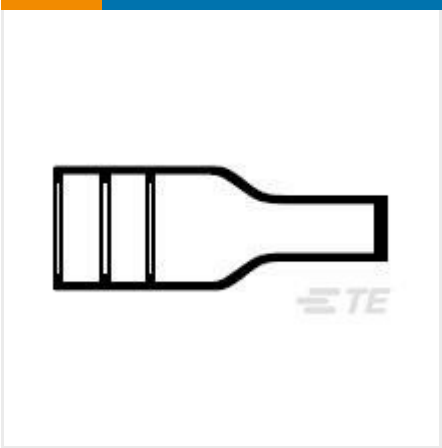

✓ Active
TE CONNECTIVITY (TE)
202D121-25/86-0
[Raychem](#) | [CAP](#) , [CRPS](#)

202D121-25/86-0
TE Internal Number: 923307-000
Alias ID: 1-1197163-3

[EU RoHS Compliant](#)
[EU ELV Compliant](#)

Lipped Yes
Operating Temperature Range (°C) -55 – 120
Adhesive Options None
Material Systems Code 25
Adhesive Pre-Coat Yes

[↓](#) **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings
Boot, Straight, With Lips
PDF
English

Product Specifications
Product Specification
Thermofit Elastomeric Molded Components Flame-Retarded, Semi-Rigid, Heat-Shrinkable
PDF
English

-25 MOULDED PARTS
PDF
English

Product Environmental Compliance

Safety Data Sheet

Aliphatic Polyamide Based Adhesives.

PDF

Dutch

Aliphatic Polyamide Based Adhesives.

PDF

English

Aliphatic Polyamide Based Adhesives.

PDF

French

Aliphatic Polyamide Based Adhesives.

PDF

German

Aliphatic Polyamide Based Adhesives.

PDF

Italian

Aliphatic Polyamide Based Adhesives.

PDF

Spanish

Aliphatic Polyamide Based Adhesives.

PDF

Swedish

EPS Heat Shrinkable Polymeric Products

PDF

English

EPS Heat Shrinkable Polymeric Products

PDF

French

EPS Heat Shrinkable Polymeric Products

PDF

German

EPS Heat Shrinkable Polymeric Products

PDF

Italian

EPS Heat Shrinkable Polymeric Products

PDF

Norwegian

EPS Heat Shrinkable Polymeric Products

PDF

Spanish

EPS Heat Shrinkable Polymeric Products

PDF

Swedish

EPS Heat Shrinkable Polymeric Products

PDF

Dutch

EPS Heat Shrinkable Polymeric Products

PDF

Danish

Aliphatic Polyamide Based Adhesives.

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 25

Adhesive Pre-Coat Yes

Material Modified Elastomer

Dimensions

Inside Diameter as Supplied 23.4 mm [.92 in]

Usage Conditions

Operating Temperature Range (°C) -55 – 120

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Approved Standards VG95343 Parts 6,7,8 and 9

Other

Adhesive Options None

Adhesive Type High Performance Pre-Coat Adhesive

Statement of Compliance

Statement of Compliance

PDF