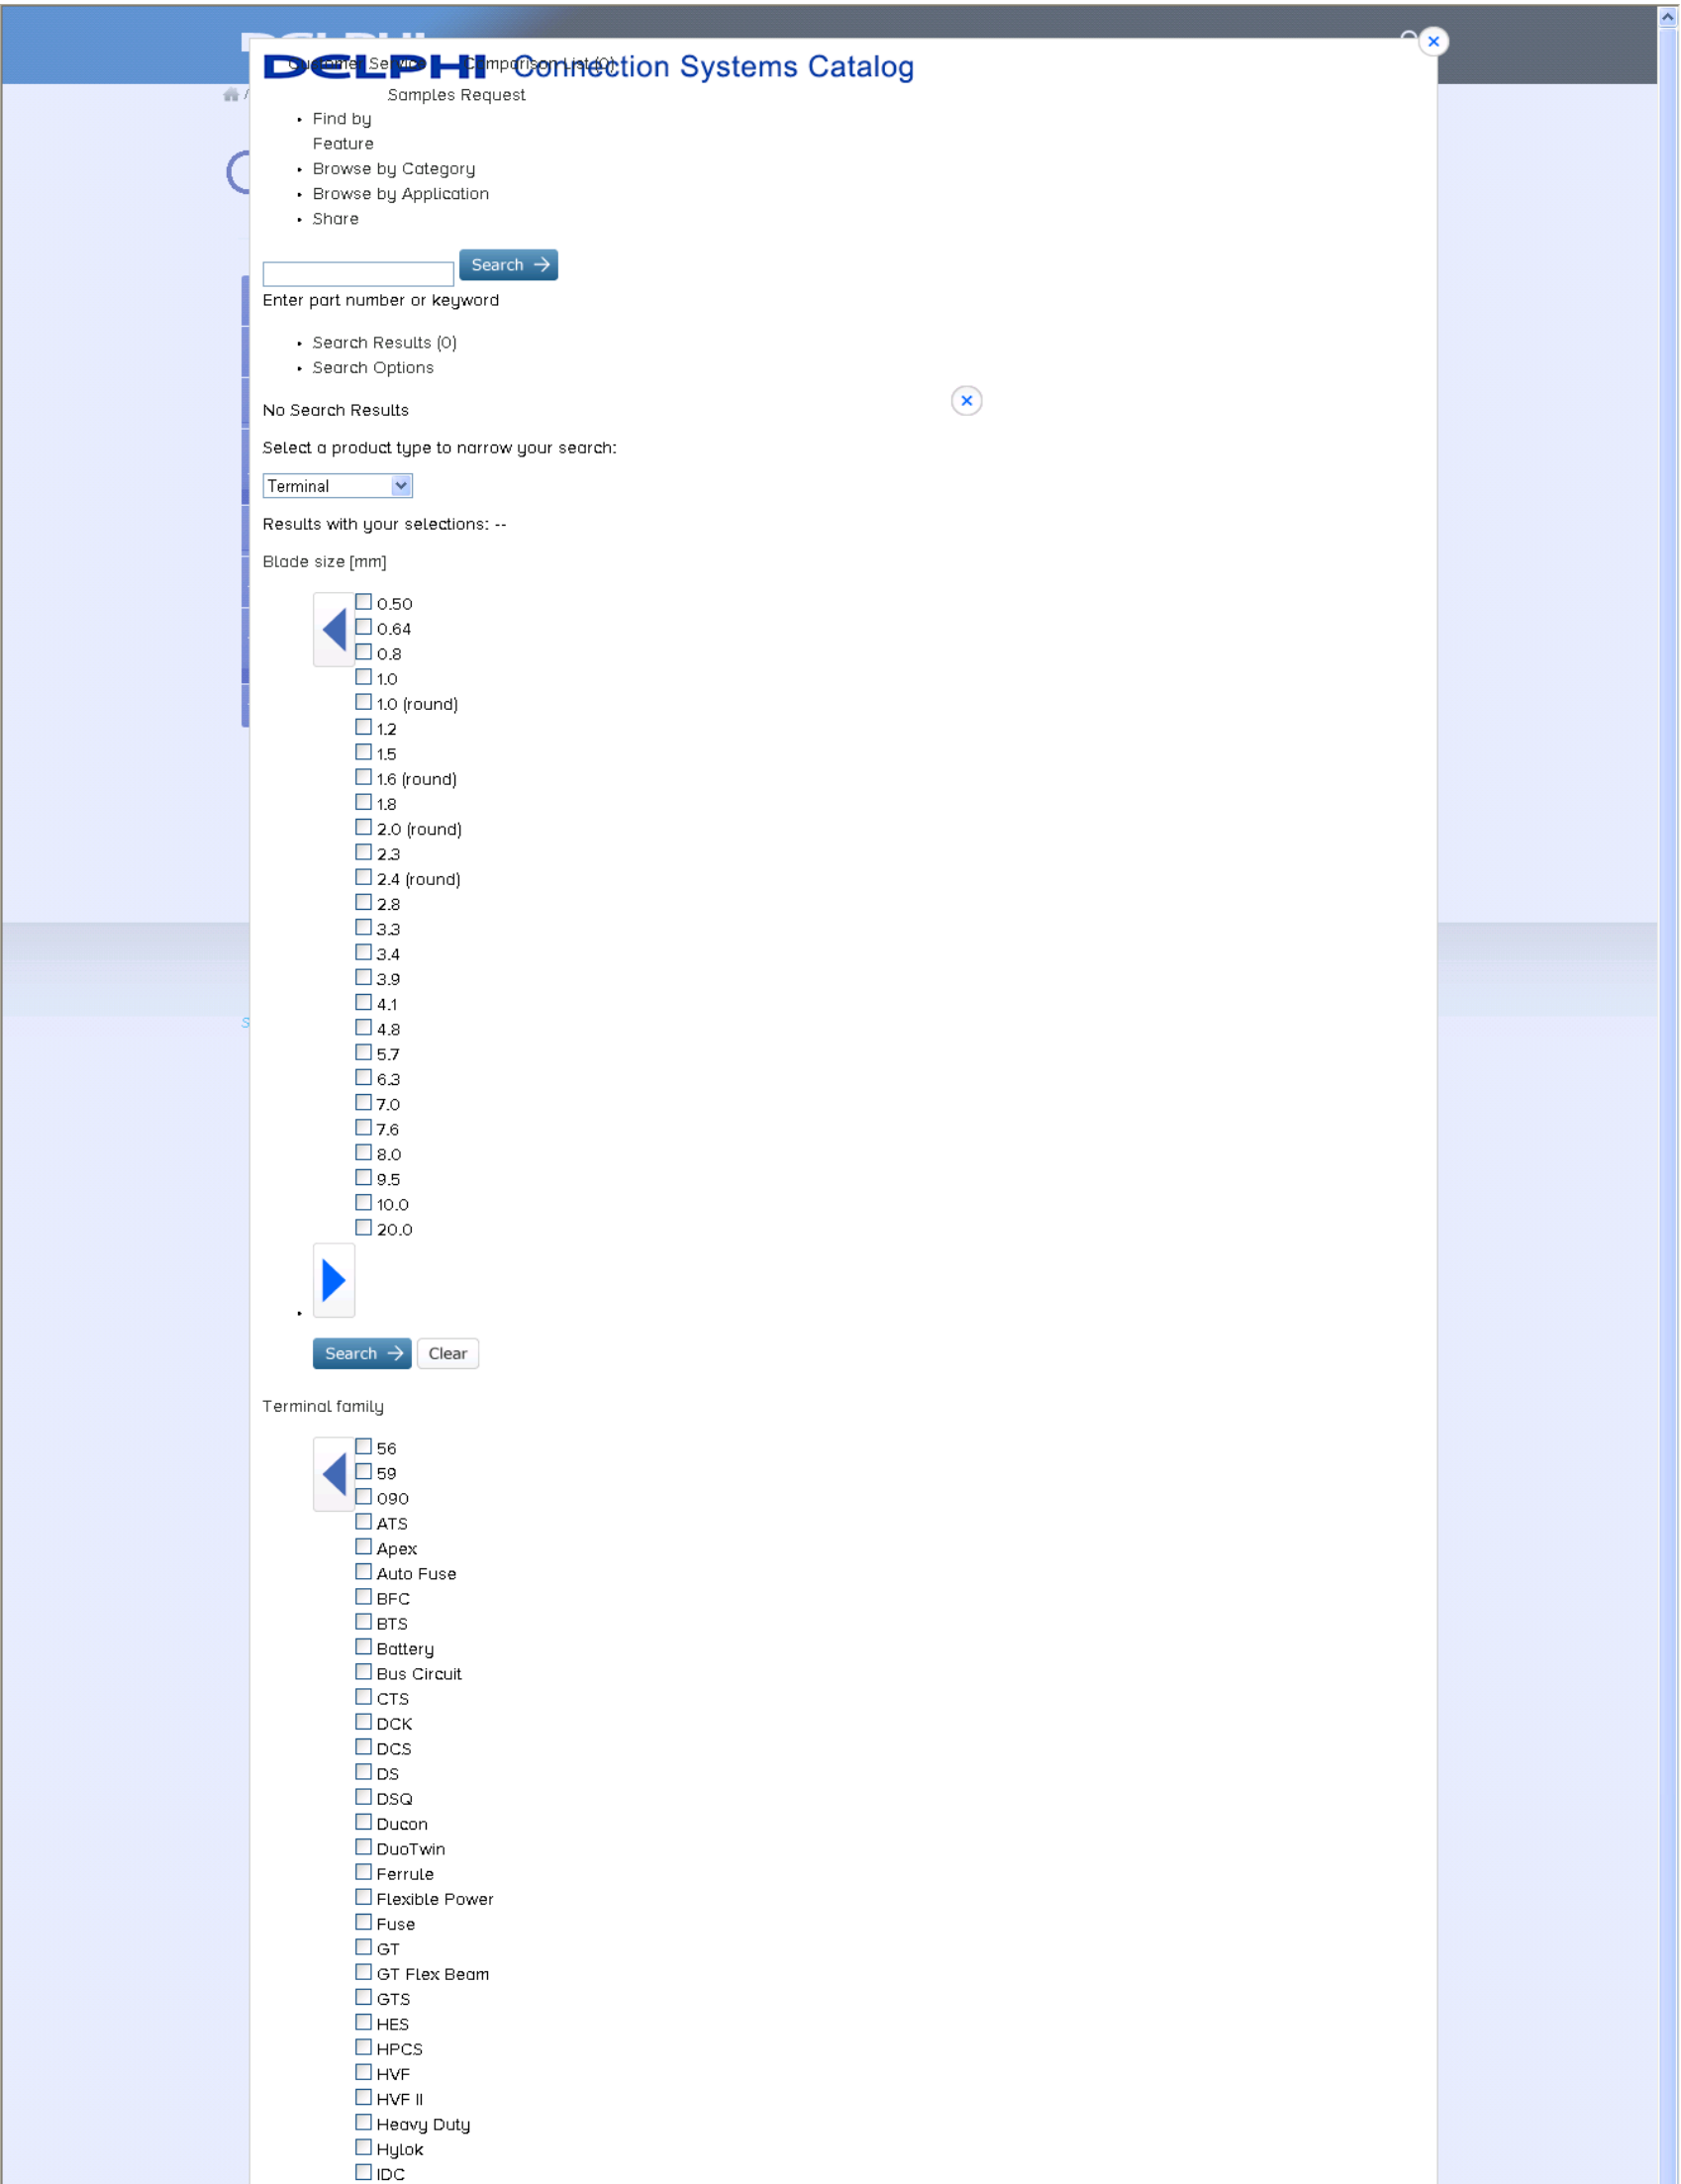

Customer Service Comparison List (0)

DELPHI Connection Systems Catalog

Samples Request

- Find by Feature
- Browse by Category
- Browse by Application
- Share

Enter part number or keyword

- Search Results (0)
- Search Options

No Search Results

Select a product type to narrow your search:

Terminal

Results with your selections: --

Blade size [mm]

- ☐ 0.50
- ☐ 0.64
- ☐ 0.8
- ☐ 1.0
- ☐ 1.0 (round)
- ☐ 1.2
- ☐ 1.5
- ☐ 1.6 (round)
- ☐ 1.8
- ☐ 2.0 (round)
- ☐ 2.3
- ☐ 2.4 (round)
- ☐ 2.8
- ☐ 3.3
- ☐ 3.4
- ☐ 3.9
- ☐ 4.1
- ☐ 4.8
- ☐ 5.7
- ☐ 6.3
- ☐ 7.0
- ☐ 7.6
- ☐ 8.0
- ☐ 9.5
- ☐ 10.0
- ☐ 20.0

Terminal family

- ☐ 56
- ☐ 59
- ☐ 090
- ☐ ATS
- ☐ Apex
- ☐ Auto Fuse
- ☐ BFC
- ☐ BTS
- ☐ Battery
- ☐ Bus Circuit
- ☐ CTS
- ☐ DCK
- ☐ DCS
- ☐ DS
- ☐ DSQ
- ☐ Ducon
- ☐ DuoTwin
- ☐ Ferrule
- ☐ Flexible Power
- ☐ Fuse
- ☐ GT
- ☐ GT Flex Beam
- ☐ GTS
- ☐ HES
- ☐ HPCS
- ☐ HVF
- ☐ HVF II
- ☐ Heavy Duty
- ☐ Hylok
- ☐ IDC

☐ Ignition
☐ Lamp Socket
☐ MCS
☐ MTS
☐ MTS-B
☐ Metri-Pack
☐ Micro 64
☐ Micro HVT
☐ Micro-Pack
☐ OCS
☐ Pack-Con
☐ Performance Pack
☐ Power Pack
☐ RCS
☐ Ring
☐ Sicma
☐ Spade
☐ Splice
☐ TTS
☐ USB MINI-B
☐ VF
☐ Weather Pack

Search → Clear

Plating

☐ Bronze
☐ Chrome
☐ Gold
☐ Gold + Nickel
☐ Gold + Tin
☐ Nickel
☐ Nickel + Tin
☐ Palladium
☐ Palladium / Gold
☐ Palladium-Gold-Nickel
☐ Silver
☐ Silver + Tin
☐ Tin
☐ Tin over Copper
☐ Tin, Lead
☐ Unplated

Search → Clear

Gender

☐ Female
☐ Male
☐ Male + Female
☐ Male + Male
☐ Splice

Search → Clear

Sealed

☐ Mat Sealed
☐ Sealed
☐ Unsealed

Search → Clear

Inside Ring Diameter [mm]

☐ 0.20
☐ 0.28
☐ 0.35
☐ 3.20
☐ 3.60
☐ 3.73
☐ 3.74
☐ 4.21
☐ 4.30
☐ 4.39
☐ 5.13
☐ 5.18
☐ 5.30
☐ 5.40
☐ 5.53
☐ 5.60

☐ 6.00
☐ 6.10
☐ 6.20
☐ 6.33
☐ 6.40
☐ 6.50
☐ 6.60
☐ 6.70
☐ 6.87
☐ 7.10
☐ 7.11
☐ 7.15
☐ 7.16
☐ 7.21
☐ 8.30
☐ 8.40
☐ 8.50
☐ 8.71
☐ 8.76
☐ 8.80
☐ 9.50
☐ 9.52
☐ 9.90
☐ 10.00
☐ 10.26
☐ 10.29
☐ 10.32
☐ 10.33
☐ 10.34
☐ 10.40
☐ 10.50
☐ 10.60
☐ 11.96
☐ 12.00
☐ 12.70
☐ 12.80
☐ 12.85
☐ 12.90
☐ 13.00
☐ 13.53
☐ 13.54

Search → Clear

Outside Ring Diameter [mm]

☐ 0.47
☐ 0.62
☐ 0.81
☐ 6.35
☐ 7.92
☐ 8.00
☐ 8.70
☐ 8.73
☐ 8.74
☐ 8.75
☐ 8.80
☐ 9.00
☐ 9.53
☐ 10.00
☐ 10.34
☐ 10.40
☐ 10.92
☐ 11.30
☐ 11.50
☐ 11.56
☐ 11.58
☐ 11.80
☐ 12.00
☐ 13.00
☐ 14.27
☐ 14.28
☐ 14.40
☐ 14.45
☐ 14.98
☐ 15.00
☐ 15.20
☐ 15.74
☐ 15.84
☐ 17.40
☐ 17.45
☐ 17.48
☐ 18.00
☐ 19.00
☐ 19.05
☐ 20.00
☐ 20.60
☐ 20.62
☐ 22.35
☐ 22.40
☐ 23.00

☐ 28.56
☐ 28.60

Search → Clear

Minimum Cable Core Cross Section [mm2]

☐ 0.01
☐ 0.08
☐ 0.13
☐ 0.14
☐ 0.20
☐ 0.22
☐ 0.25
☐ 0.30
☐ 0.33
☐ 0.35
☐ 0.40
☐ 0.50
☐ 0.52
☐ 0.55
☐ 0.60
☐ 0.70
☐ 0.75
☐ 0.80
☐ 0.82
☐ 0.85
☐ 1.00
☐ 1.10
☐ 1.20
☐ 1.25
☐ 1.30
☐ 1.31
☐ 1.35
☐ 1.40
☐ 1.50
☐ 1.60
☐ 2.00
☐ 2.50
☐ 2.80
☐ 3.00
☐ 3.31
☐ 3.50
☐ 4.00
☐ 5.00
☐ 6.00
☐ 6.50
☐ 8.00
☐ 9.00
☐ 9.30
☐ 10.00
☐ 12.00
☐ 13.00
☐ 14.00
☐ 15.00
☐ 16.00
☐ 19.00
☐ 25.00
☐ 30.00
☐ 32.00
☐ 35.00
☐ 40.00
☐ 42.00
☐ 50.00
☐ 62.00
☐ 70.00
☐ 81.00
☐ 103.00
☐ AWG 12 + 12
☐ AWG 14 + 14 16 + 16
☐ AWG 20 + 20 18 + 18
☐ AWG 20 + 20 20 + 18
☐ AWG 20B
☐ AWG 22 + 22 20 + 22

Search → Clear

Maximum Cable Core Cross Section [mm2]

☐ 0.13
☐ 0.18
☐ 0.22

☐ 0.33
☐ 0.35
☐ 0.50
☐ 0.52
☐ 0.60
☐ 0.70
☐ 0.75
☐ 0.80
☐ 0.82
☐ 0.85
☐ 0.86
☐ 1.00
☐ 1.25
☐ 1.30
☐ 1.31
☐ 1.50
☐ 2.00
☐ 2.08
☐ 2.50
☐ 2.70
☐ 3.00
☐ 3.31
☐ 3.63
☐ 4.00
☐ 5.00
☐ 5.25
☐ 5.26
☐ 6.00
☐ 6.50
☐ 8.00
☐ 9.00
☐ 10.00
☐ 12.00
☐ 13.00
☐ 13.23
☐ 13.50
☐ 14.00
☐ 16.00
☐ 19.00
☐ 20.00
☐ 21.20
☐ 25.00
☐ 32.00
☐ 35.00
☐ 40.00
☐ 42.00
☐ 50.00
☐ 61.00
☐ 62.00
☐ 70.00
☐ 103.00
☐ AWG 12 + 12
☐ AWG 14 + 16
☐ AWG 18 + 18 16 + 16
☐ AWG 18B
☐ AWG 2
☐ AWG 20 + 20 18 + 18
☐ AWG 20 + 20 18 + 20

Search → Clear

Minimum Cable Diameter [mm]

☐ 0.34
☐ 0.35
☐ 0.50
☐ 0.55
☐ 0.80
☐ 0.81
☐ 0.83
☐ 0.88
☐ 0.90
☐ 0.95
☐ 1.00
☐ 1.05
☐ 1.10
☐ 1.12
☐ 1.15
☐ 1.20
☐ 1.25
☐ 1.30
☐ 1.34
☐ 1.35
☐ 1.40

☐ 1.45
☐ 1.47
☐ 1.50
☐ 1.60
☐ 1.65
☐ 1.69
☐ 1.70
☐ 1.76
☐ 1.78
☐ 1.80
☐ 1.84
☐ 1.85
☐ 1.86
☐ 1.87
☐ 1.90
☐ 1.91
☐ 1.92
☐ 1.93
☐ 1.95
☐ 1.96
☐ 1.98
☐ 2.00
☐ 2.03
☐ 2.04
☐ 2.05
☐ 2.06
☐ 2.09
☐ 2.10
☐ 2.11
☐ 2.12
☐ 2.20
☐ 2.30
☐ 2.40
☐ 2.41
☐ 2.42
☐ 2.45
☐ 2.48
☐ 2.50
☐ 2.55
☐ 2.56
☐ 2.57
☐ 2.60
☐ 2.62
☐ 2.69
☐ 2.70
☐ 2.72
☐ 2.80
☐ 2.81
☐ 2.84
☐ 2.89
☐ 2.94
☐ 2.95
☐ 2.97
☐ 2.98
☐ 3.00
☐ 3.04
☐ 3.05
☐ 3.10
☐ 3.11
☐ 3.12
☐ 3.13
☐ 3.20
☐ 3.30
☐ 3.36
☐ 3.40
☐ 3.44
☐ 3.45
☐ 3.49
☐ 3.53
☐ 3.55
☐ 3.61
☐ 3.70
☐ 3.74
☐ 3.80
☐ 3.81
☐ 3.82
☐ 3.87
☐ 3.95
☐ 3.97
☐ 4.00
☐ 4.06
☐ 4.10
☐ 4.30
☐ 4.32
☐ 4.40
☐ 4.50
☐ 4.52
☐ 4.71
☐ 4.95
☐ 5.08
☐ 5.20
☐ 5.28
☐ 5.50

☐ 5.54
☐ 5.80
☐ 6.24
☐ 6.31
☐ 6.34
☐ 6.40
☐ 6.45
☐ 6.50
☐ 6.55
☐ 6.60
☐ 6.63
☐ 7.00
☐ 7.36
☐ 7.40
☐ 7.70
☐ 7.75
☐ 8.00
☐ 8.01
☐ 8.02
☐ 8.47
☐ 8.50
☐ 8.54
☐ 8.65
☐ 8.69
☐ 8.94
☐ 9.00
☐ 9.25
☐ 9.30
☐ 9.35
☐ 9.40
☐ 10.00
☐ 10.04
☐ 10.34
☐ 10.40
☐ 10.41
☐ 10.50
☐ 10.84
☐ 10.90
☐ 11.00
☐ 11.10
☐ 11.39
☐ 11.93
☐ 11.94
☐ 12.00
☐ 12.10
☐ 12.16
☐ 12.50
☐ 12.75
☐ 13.00
☐ 13.20
☐ 13.97
☐ 14.30
☐ 15.00
☐ 15.20
☐ 15.30
☐ 17.00
☐ 18.97
☐ 19.79
☐ 20.00
☐ 31.10
☐ 32.00
☐ 50.00

Search → Clear

Maximum Cable Diameter [mm]

☐ 0.50
☐ 0.62
☐ 0.75
☐ 0.80
☐ 0.85
☐ 1.00
☐ 1.01
☐ 1.05
☐ 1.10
☐ 1.20
☐ 1.30
☐ 1.40
☐ 1.45
☐ 1.50
☐ 1.60
☐ 1.65
☐ 1.70

☐ 1.75
☐ 1.80
☐ 1.83
☐ 1.85
☐ 1.86
☐ 1.87
☐ 1.88
☐ 1.90
☐ 1.92
☐ 1.93
☐ 2.00
☐ 2.02
☐ 2.03
☐ 2.04
☐ 2.05
☐ 2.06
☐ 2.08
☐ 2.10
☐ 2.12
☐ 2.13
☐ 2.19
☐ 2.20
☐ 2.25
☐ 2.30
☐ 2.34
☐ 2.35
☐ 2.40
☐ 2.41
☐ 2.42
☐ 2.45
☐ 2.47
☐ 2.48
☐ 2.50
☐ 2.51
☐ 2.55
☐ 2.60
☐ 2.64
☐ 2.65
☐ 2.66
☐ 2.68
☐ 2.69
☐ 2.70
☐ 2.76
☐ 2.77
☐ 2.78
☐ 2.80
☐ 2.93
☐ 3.00
☐ 3.05
☐ 3.10
☐ 3.11
☐ 3.12
☐ 3.13
☐ 3.15
☐ 3.20
☐ 3.25
☐ 3.30
☐ 3.31
☐ 3.34
☐ 3.35
☐ 3.40
☐ 3.49
☐ 3.52
☐ 3.56
☐ 3.59
☐ 3.60
☐ 3.65
☐ 3.67
☐ 3.68
☐ 3.70
☐ 3.80
☐ 3.89
☐ 3.90
☐ 3.94
☐ 3.95
☐ 3.96
☐ 3.97
☐ 4.00
☐ 4.07
☐ 4.09
☐ 4.20
☐ 4.21
☐ 4.30
☐ 4.40
☐ 4.44
☐ 4.48
☐ 4.50
☐ 4.53
☐ 4.60
☐ 4.67
☐ 4.70
☐ 4.80
☐ 4.84

☐ 5.00
☐ 5.03
☐ 5.08
☐ 5.10
☐ 5.24
☐ 5.25
☐ 5.28
☐ 5.33
☐ 5.35
☐ 5.50
☐ 5.54
☐ 5.55
☐ 5.60
☐ 6.00
☐ 6.10
☐ 6.36
☐ 6.40
☐ 6.45
☐ 6.46
☐ 6.50
☐ 6.65
☐ 7.00
☐ 7.36
☐ 7.50
☐ 8.01
☐ 8.10
☐ 8.13
☐ 8.30
☐ 8.54
☐ 8.84
☐ 8.94
☐ 9.00
☐ 9.19
☐ 9.30
☐ 9.35
☐ 9.40
☐ 9.86
☐ 10.00
☐ 10.20
☐ 10.25
☐ 10.50
☐ 10.84
☐ 10.90
☐ 10.91
☐ 10.95
☐ 11.00
☐ 11.16
☐ 11.20
☐ 11.39
☐ 11.50
☐ 11.93
☐ 12.00
☐ 12.70
☐ 12.75
☐ 12.82
☐ 13.50
☐ 14.02
☐ 14.50
☐ 15.00
☐ 15.10
☐ 15.12
☐ 16.00
☐ 16.40
☐ 16.92
☐ 17.00
☐ 17.50
☐ 18.30
☐ 18.97
☐ 19.00
☐ 19.79
☐ 20.00
☐ 31.10
☐ 32.00
☐ 50.00
☐ 62.00

▶

Search → Clear

Clear Search →

Series 59 Side Attachment Female Unsealed Tin Plating Tang Terminal, Cable Range 0.50

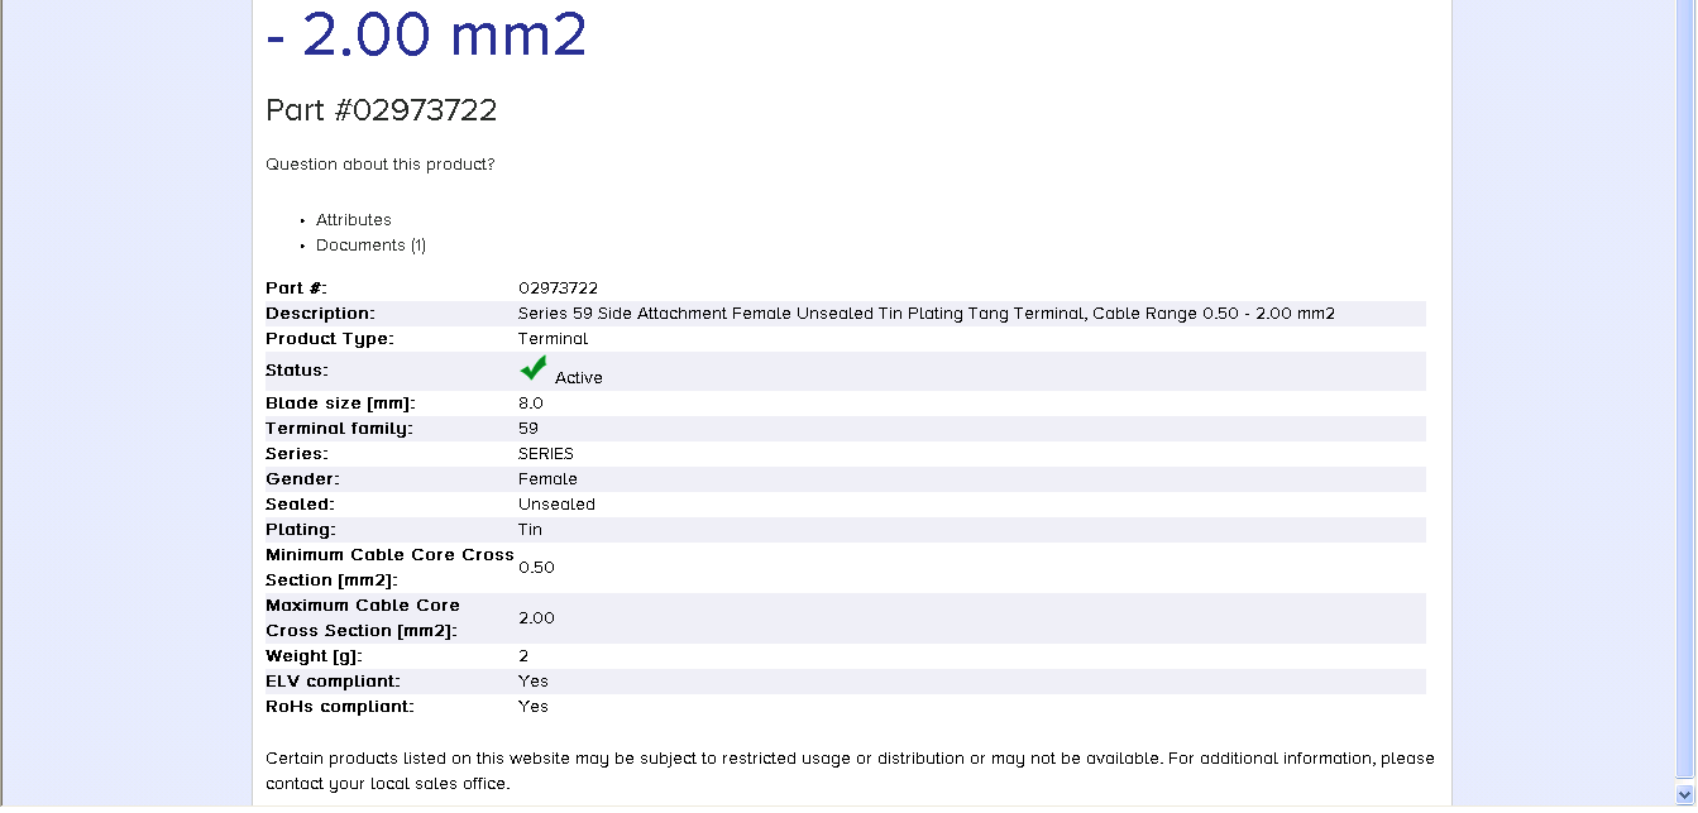

- 2.00 mm2

Part #02973722

Question about this product?

- Attributes
- Documents (1)

Part #:	02973722
Description:	Series 59 Side Attachment Female Unsealed Tin Plating Tang Terminal, Cable Range 0.50 - 2.00 mm2
Product Type:	Terminal
Status:	✓ Active
Blade size [mm]:	8.0
Terminal family:	59
Series:	SERIES
Gender:	Female
Sealed:	Unsealed
Plating:	Tin
Minimum Cable Core Cross Section [mm2]:	0.50
Maximum Cable Core Cross Section [mm2]:	2.00
Weight [g]:	2
ELV compliant:	Yes
RoHs compliant:	Yes

Certain products listed on this website may be subject to restricted usage or distribution or may not be available. For additional information, please contact your local sales office.

Downloaded from Arrow.com.