
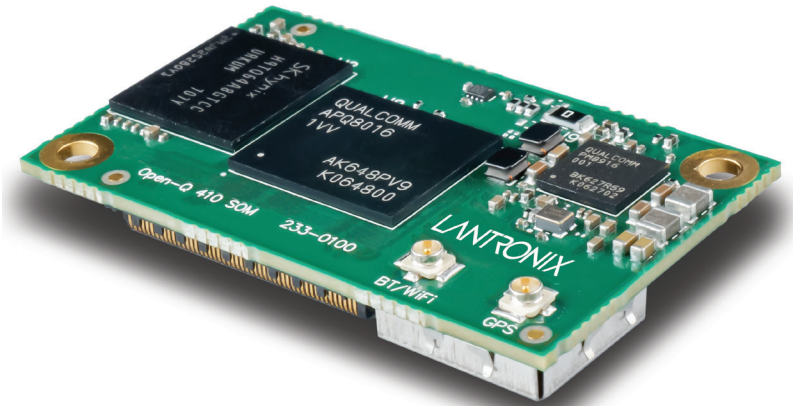


Open-Q™ 410 SOM (System on Module)

Based on the Qualcomm® APQ8016E SoC

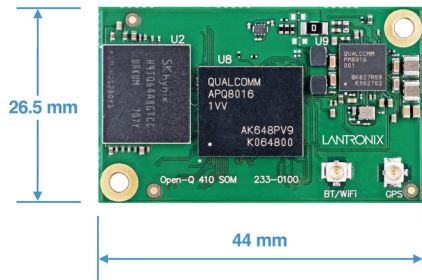

Lantronix's Open-Q™ 410 SOM is a compact, pre-certified, production ready module based on the Qualcomm APQ8016E SoC. The SOM's small form factor, advanced technology, and extensive range of supported peripherals provide the perfect platform for creating low cost, high performance embedded and mobile IoT devices.

Key Features

- Qualcomm® APQ8016E SoC
- 1GB LPDDR3 and 8GB eMMC
- FCC/IC Pre-certified Wi-Fi/BT
- Japan Radio Type Certification
- Ultra-compact 44mm x 26.5mm
- Android™ 7, Linux®, Microsoft Azure Certified

Applications

- Wearable cam / Action cam / 360 degree cam
- Smart home / IP cam / Security cam
- Industrial machine vision camera
- Stereo-vision camera
- Retail analytics camera
- Robotics / drones

Engineering Services:


We provide a full solution – our unparalleled engineering expertise and product development skills deliver innovative products that are cost-effective and can jumpstart your Go-to-Market timeline.

Our business model offers turnkey product development services, or we can augment your team in specific areas of development. The choice is yours.

Key development expertise in:

- Camera development and tuning
- Voice control
- Machine learning
- Mechanical & RF design
- Thermal & power optimization

IoT Product Development made easy





Lantronix Open-Q™ 410 SOM

Hardware Specifications:

Open-Q™ 410 SOM	
• Processors	Qualcomm® APQ8016E SoC Quad-Core ARM® Cortex® A53 (64-bit, 1.2GHz) Qualcomm® Adreno™ 306 GPU Qualcomm® Hexagon™ v5 DSP
• Memory/Storage	1GB LPDDR3 RAM (533MHz), 8GB eMMC 5.0 Flash in eMCP combo package
• Wireless	Wi-Fi 802.11b/g/n 2.4 GHz single band (WCN3620), Bluetooth 4.1 + BLE FCC/IC Modular Certified Wi-Fi/BT
• Location Services	Qualcomm® IZat™ Gen 8C GPS & GLONASS
• Display Interface	1x MIPI-DSI 4-lane, up to 720p 60fps
• Camera Interfaces	2x MIPI-CSI — 1x 4-lane, 1x 2-lane, up to 13MP
• Video	Encode up to 720p 30fps (H.264 Baseline/MPEG-4), 1080p 30fps (MPEG-4/H.264/VP8/H.263) Decode up to 1080p 30fps (MPEG-4/H.264/H.263/DivX/MPEG2/VC1/Soreson/VP8)
• Audio	Integrated audio codec (PM8916) with: 3x Analog in, 4x Analog out 2x Digital mic in, 2x I2S
• Power/Battery Management	Power management and battery charging (PMI8916)
• I/O	1x USB 2.0 (client or host), 6x BLSP 4-pin port configurable as I2C, SPI, UART or GPIO, 1x SDIO, 30x GPIO
• Operating Environment	Input voltage: 3.3V to 4.2V Operating Temperature: -25°C to +85°C
• Form Factor	Dimensions: 44mm x 26.5mm 2x 100 pin board to board connectors

Software:

• OS Support	Android™ 7 Nougat, Android™ 5 Lollipop, Linux®, Microsoft Azure Certified Note that all hardware features may not be supported by all SW — see latest SW release notes for details.
---------------------	--



Purchasing Information:

• Open-Q™ 410 SOM	PN: QC-DB-H00004
--------------------------	------------------

Alternate SOM configurations available by special order (minimum order quantities apply) - e.g. different memory size, etc. Contact sales to discuss your specific needs today.

Contact Information:

Americas

800.422.7055
americas_sales@lantronix.com
www.lantronix.com
NASDAQ: LTRX

Asia/Pacific/Japan

+852 3428.2338
asiapacific_sales@lantronix.com
China: +86.21.6237.8868
India: +91 994-551-2488
Indonesia: +91 994-551-2488
Japan: +81.8.50.1354.6201

Europe

+31 (0) 76.52.3.674 4
eu_sales@lantronix.com

Certifications



© 2020 Lantronix, Inc. All rights reserved. Lantronix is a registered trademark of Lantronix, Inc. in the U.S. and other countries. Open-Q is a trademark of Lantronix, Inc. Qualcomm APQ8016E SoC, Qualcomm Adreno, Qualcomm Hexagon, and Qualcomm IZat are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm, Adreno, Hexagon, and IZat are trademarks of Qualcomm Incorporated, registered in the United States and other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice. Not all features listed may be supported in software. Open-Q 410 SOM MPB-00090 Rev A

LANTRONIX®