

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

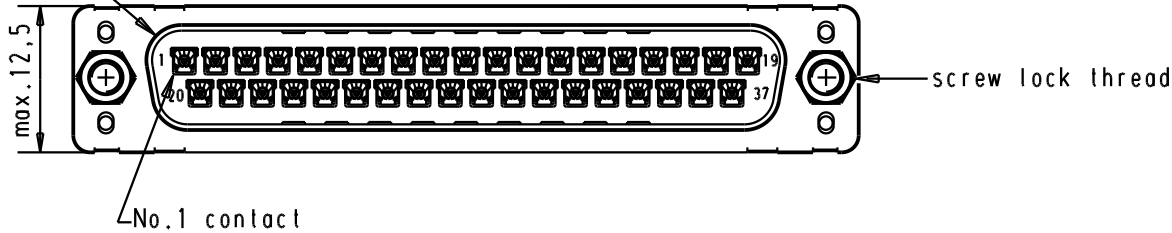


Printed board layout
component side

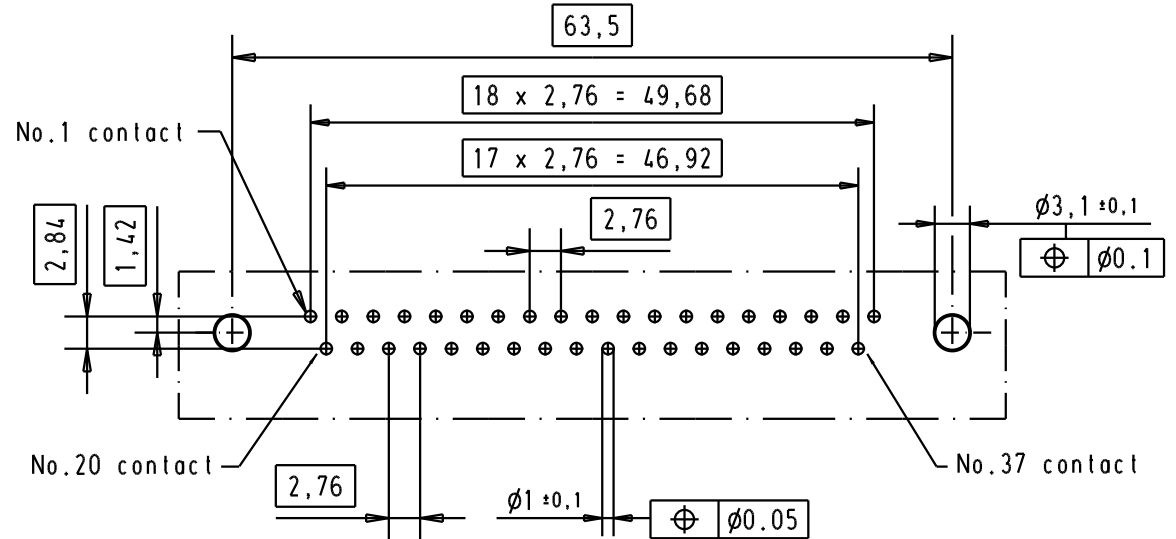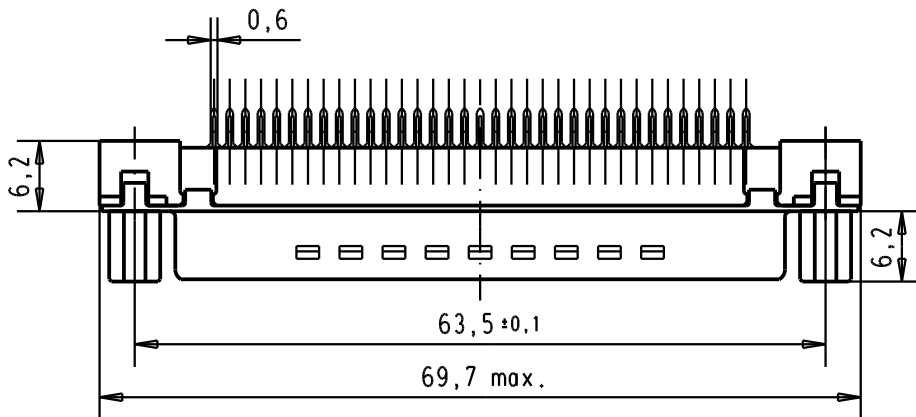

A

Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	Detail.	Dat.	Name	Moßstab/ Scale
09 65 429 3703	4-40 UNC	1				05/03/02	CV	D-Sub, High temperature, 37 poles, male, straight, with solder pins 2,9 and screw lock.	1.5:1
09 65 429 6703	4-40 UNC	2	31892	22/04/04	JH				
09 65 429 7703	4-40 UNC	3	29723	05/03/02	CV				
HARTING EURL F-95972 Paris						TB 09 65 429 x70x			Blatt/ Page 3
						Sub.			



All Dim. in mm
Orig. Size DIN A 4

