



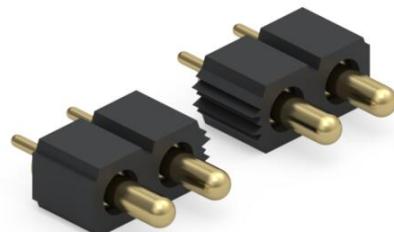

PRODUCT NUMBER: 821-22-022-10-003101

www.mill-max.com  
DATA SHEET

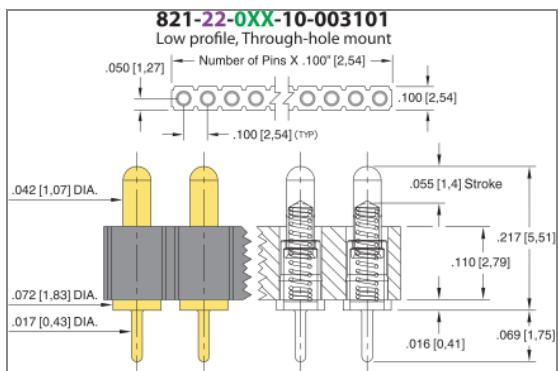

# 821-22-022-10-003101- SPECIFICATIONS

General Info		Materials	
<b>Description<sup>1</sup>:</b>	PCB Mount Spring-Loaded Header Vertical Mount Through-Hole	<b>Loose Pin/Receptacle # (Material):</b>	0906 (Brass Alloy)
<b>Plunger Type:</b>	Rounded	<b>Shell Plating:</b>	20 $\mu$ " Gold over Nickel
<b>Type:</b>	Spring-Loaded	<b>Inner Plating:</b>	(Spring) 10 $\mu$ " Gold
<b>Category:</b>	Pogo Pin Header Strip	<b>Insulator Material:</b>	Nylon 4/6
<b>Mounting Style:</b>	Through Hole Solder Mount	Technical Specs	
<b># Pins:</b>	22	<b>Initial Height:</b> .217" (5,512mm)	
<b>Packaging<sup>2</sup>:</b>	Packaged in Box or Tube	<b>Stroke:</b> .055" (1,397mm)	
<b>Pitch:</b>	.100" (2,540mm)	<b>A Dim:</b> .217" (5,512mm)	
<b>Rows:</b>	Single Row	<b>B Dim:</b> .055" (1,397mm)	
<b>Product Lifecycle:</b>	Active	Electrical Specs	
Environmental Specs			<b>Rated Voltage:</b> 100 VRMS/150 VDC
<b>Temperature Range<sup>3</sup>:</b>	-55/+125° C	<b>Insulation Resistance:</b> 10,000 M $\Omega$ min.	
<b>Shock<sup>4</sup>:</b>	No Elect. Discontinuity > 1 $\mu$ s @ 50g	<b>Dielectric Withstanding Voltage:</b> 1,000 VRMS min.	
<b>Vibration<sup>4</sup>:</b>	No Elect. Discontinuity > 1 $\mu$ s @ 10-2000HZ, 15 G	Mechanical Specs	
<b>RoHS<sup>5</sup>:</b>	Yes	<b>Durability:</b> 100,000 to 1,000,000 Cycles @ Mid-Stroke	

## NOTES:

### 1. Standard Tolerances

Assembly tolerance:  $+\/-0.010$ " (.25mm)

Connector Length "L"

Connector Length "L"	Tolerance
$L \leq 2"$ ( $L \leq 50.8$ mm)	$+\/- .005$ " ( $+\/- .127$ mm)
$2 < L \leq 3"$ ( $50.8 < L \leq 76.2$ mm)	$+\ .007 / - .006$ " ( $+\ .178 / - .152$ mm)
$3 < L \leq 4"$ ( $76.2 < L \leq 101.6$ mm)	$+\ .009 / - .007$ " ( $+\ .229 / - .178$ mm)
$4 < L \leq 5"$ ( $101.6 < L \leq 127$ mm)	$+\ .011 / - .008$ " ( $+\ .279 / - .203$ mm)
$5 < L \leq 6.4"$ ( $127 < L \leq 162.56$ mm)	$+\ .013 / - .009$ " ( $+\ .330 / - .229$ mm)

Insulator width:  $+\/-0.005$  (.13mm)

Insulator height:  $+\/-0.005$  (.13mm)

Co-planarity of SMT connectors:  $.005$ " (.13mm) up to  $1"$  (25.4mm) in connector length

Insulator Flatness:  $.005$ " (.13mm) up to  $1"$  (25.4mm) in connector length

Pin Length:  $+\/-0.006$  (.15mm)


Pin Diameter:  $+\/-0.002$  (.051mm)

Pin Angle:  $+\/-2^\circ$

- Not all part numbers in the series may be packaged in tubes. Some specific part numbers may be packaged in a box.
- Per IEC 60512-11-(4,9,10,12)
- For discrete pin only. Per IEC 60512-6-3: Test 6c: Shock
- Mill-Max products labeled with the RoHS symbol are compliant with all three RoHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).

## ADDITIONAL PARTS, PACKAGING, & ASSEMBLY INFO

### Suggested P.C.B. Footprint

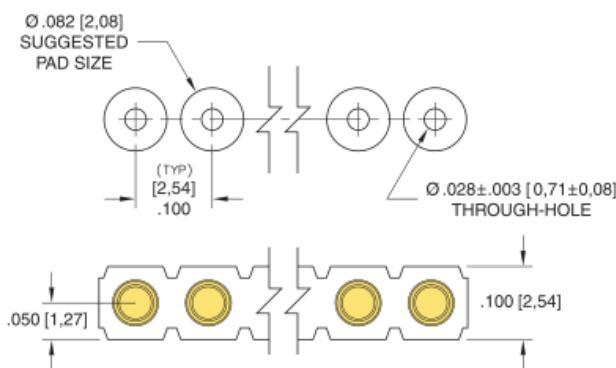

## ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance, Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

## RELATED LINKS AND DOCUMENTS

Engineering Notebook: ( <https://www.mill-max.com/engineering-notebooks/introduction-to-spring-loaded-pogo-pins-connectors> )

Environmental Compliance: ( <https://www.mill-max.com/rohs> )