
Bipolar Transistor

(–)15 V, (–)0.7 A, Low V_{CE}(sat), (PNP)NPN Single CP

2SB815, 2SD1048



1: Source
2: Drain
3: Gate

SC–59 / CP3
CASE 318BJ

Features

- Ultrasmall Package Allows Miniaturization in End Products
- Large Current Capacity (I_C=0.7 A) and Low–Saturation Voltage
- These are Pb–Free Devices

Specifications


( ): 2SB815

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)


Parameter	Symbol	Conditions	Ratings	Unit
Collector to Base Voltage	V_{CBO}		(–)20	V
Collector to Emitter Voltage	V_{CEO}		(–)15	V
Emitter to Base Voltage	V_{EBO}		(–)5	V
Collector Current	I_C		(–)0.7	A
Collector Current (Pulse)	I_{CP}		(–)1.5	A
Collector Dissipation	P_C		200	mW
Junction Temperature	Tj		125	°C
Storage Temperature	Tstg		–55 to +125	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

MARKING DIAGRAMS




2SB815



2SD1048

ELECTRICAL CONNECTION



2SB815

2SD1048

ORDERING INFORMATION

Device	Package	Shipping†
2SB815–6–TB–E	SC–59 / CP3 (Pb–Free)	3000 / Tape & Reel
2SB815–7–TB–E	SC–59 / CP3 (Pb–Free)	3000 / Tape & Reel
2SD1048–6–TB–E	SC–59 / CP3 (Pb–Free)	3000 / Tape & Reel
2SD1048–7–TB–E	SC–59 / CP3 (Pb–Free)	3000 / Tape & Reel

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

DISCONTINUED
THIS DEVICE IS NOT AVAILABLE
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS (T_A = 25°C)

Parameter	Symbol	Conditions	Ratings			Unit
			Min	Typ	Max	
Collector Cutoff Current	I_{CBO}	V_{CB} = (−)15 V, I_E = 0 A	−	−	(−)0.1	μA
Emitter Cutoff Current	I_{EBO}	V_{EB} = (−)4 V, I_C = 0 A	−	−	(−)0.1	μA
DC Current Gain	$h_{FE}1$	V_{CE} = (−)2 V, I_C = (−)50 mA	200*	−	600*	
	$h_{FE}2$	V_{CE} = (−)2 V, I_C = (−)500 mA	80	−	−	
Gain−Bandwidth Product	f_T	V_{CE} = (−)10 V, I_C = (−)50 mA	−	250	−	MHz
Output Capacitance	Cob	V_{CB} = (−)10 V, f = 1 MHz	−	(13)8	−	pF
Collector to Emitter Saturation Voltage	V_{CE}(sat)1	I_C = (−)5 mA, I_B = (−)0.5 mA	−	(−15)10	(−35)25	mV
	V_{CE}(sat)2	I_C = (−)100 mA, I_B = (−)10 mA	−	(−60)30	(−120)80	mV

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

* The 2SB815/2SD1048 are classified by 50 mA h_{FE} as follows:

Rank	6	7
h_{FE}	200 to 400	300 to 600

DISCONTINUED
THIS DEVICE IS NOT AVAILABLE
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

Downloaded from Arrow.com.

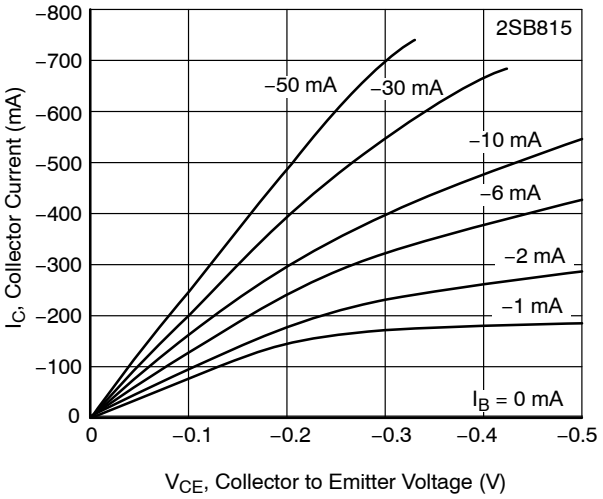


Figure 1. I_C – V_{CE}

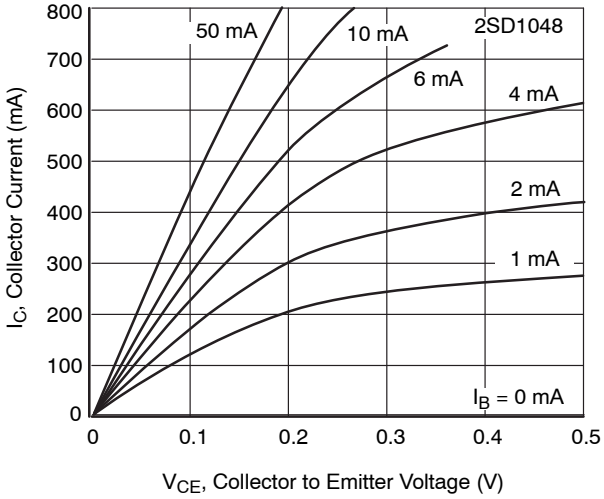


Figure 2. I_C – V_{CE}

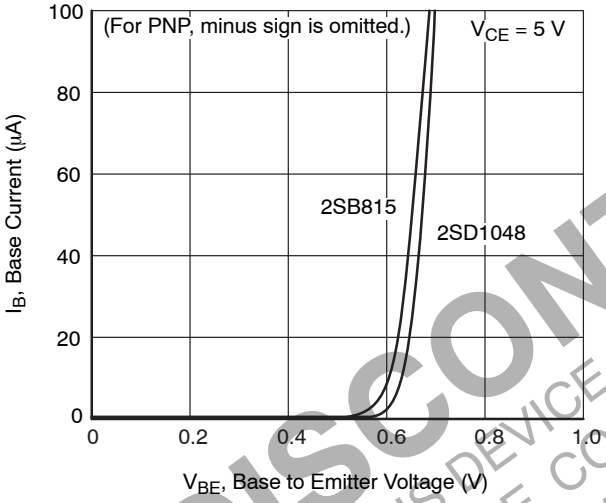


Figure 3. I_B – V_{BE}

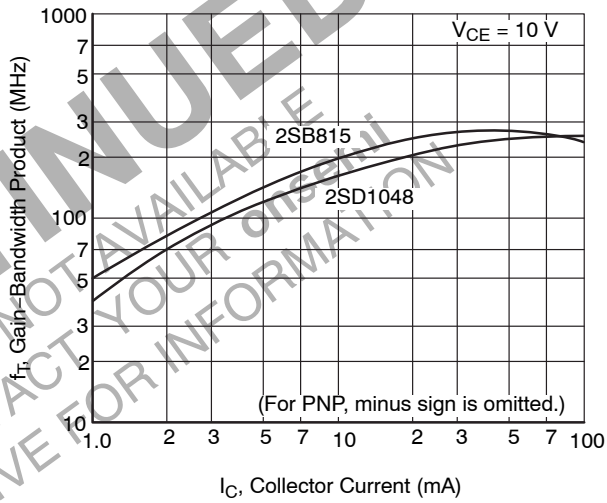


Figure 4. f_T – I_C

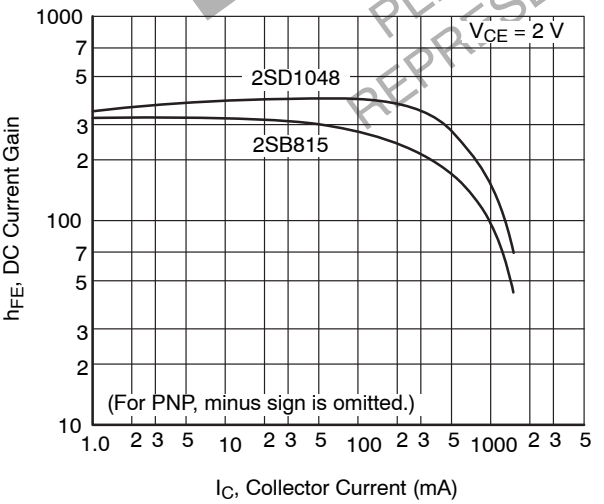


Figure 5. h_{FE} – I_C

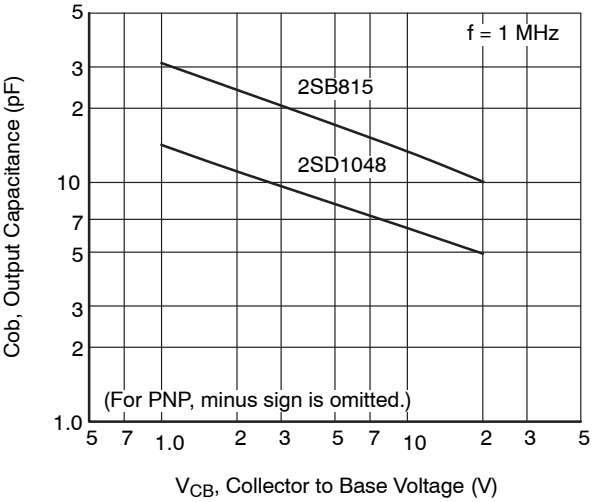


Figure 6. Cob – V_{CB}

DISCONTINUED
THIS DEVICE IS NOT AVAILABLE
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

Downloaded from Arrow.com.

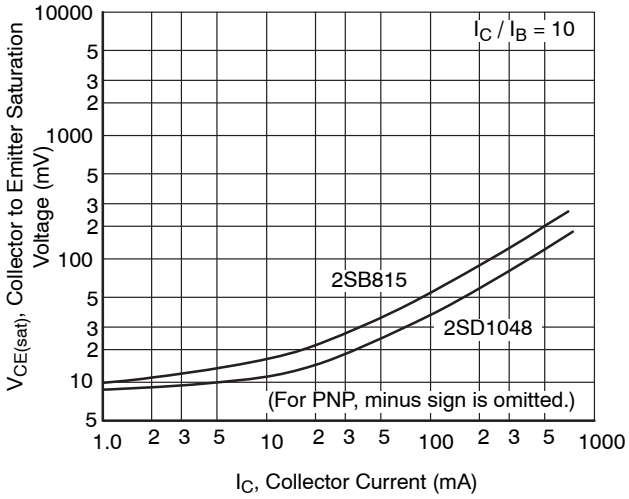


Figure 7. $V_{CE(sat)}$ – I_C

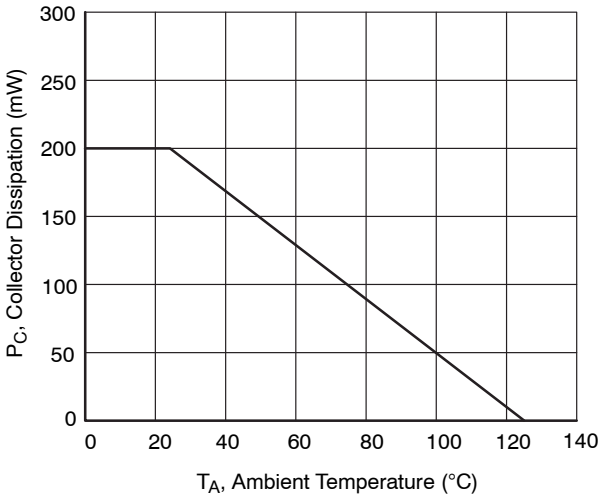


Figure 8. P_C – T_A

DISCONTINUED
THIS DEVICE IS NOT AVAILABLE
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

Downloaded from Arrow.com.

REVISION HISTORY

Revision	Description of Changes	Date
4	Document Discontinued.	1/13/2026

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.

DISCONTINUED
THIS DEVICE IS NOT AVAILABLE
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION


Downloaded from Arrow.com.




SCALE 2:1

SC−59 / CP3
CASE 318BJ
ISSUE O


DATE 09 JAN 2015

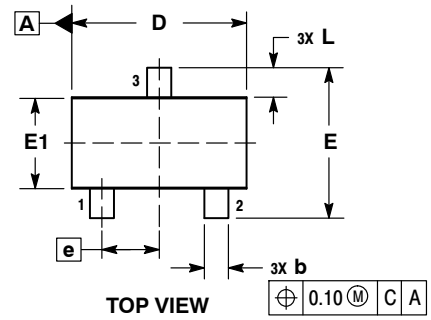

TOP VIEW

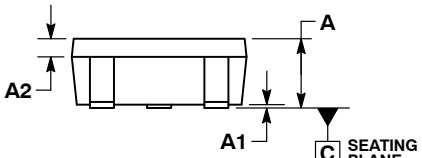

SIDE VIEW




END VIEW

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER SIDE.
4. DIMENSIONS D AND E1 ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
5. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.10 AND 0.20 FROM THE TIP.

	MILLIMETERS	
DIM	MIN	MAX
A	0.95	1.35
A1	0.00	0.10
A2	0.20	0.40
b	0.35	0.50
c	0.10	0.20
D	2.75	3.05
E	2.30	2.70
E1	1.35	1.65
e	0.95 BSC	
L	0.35	0.75

GENERIC MARKING DIAGRAM




XXX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present.

RECOMMENDED SOLDERING FOOTPRINT*



DIMENSIONS: MILLIMETERS

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON94458F**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**SC−59 / CP3**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2015

Downloaded from Arrow.com.

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

◊

Downloaded from Arrow.com.