

ePoP

ePoP – Embedded package-on-package memory for wearables

Kingston's ePoP provides a highly integrated JEDEC standard component that combines Embedded MultiMedia Card (e•MMC) storage and Low-Power Double Data Rate (LPDDR) DRAM into a Package-on-Package (PoP) solution. ePoP is mounted directly on top of a compatible host System-on-a-Chip (SoC), which reduces Printed Circuit Board (PCB) space and ensures optimum performance. ePoP is an ideal solution for space-constrained applications such as wearables.

Downloaded from Arrow.com.

KEY BENEFITS

- By mounting directly on top of a host SoC, ePoP provides an ideal solution for small-form-factor applications such as wearables.
- Low-power DRAM and optimised storage firmware reduce power consumption while delivering the high performance needed for battery-powered wearable applications.
- Simplifies system design, reduces time to market and shortens the qualification cycle.
- Multiple firmware configurations available to best fit your application requirements for performance, power and life span.


MARKET SEGMENTS



IoT



Wearables

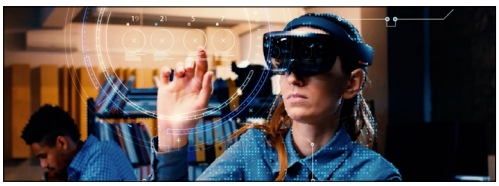

Augmented Reality (AR) / Virtual Reality (VR) devices

EPOP PART NUMBERS AND SPECIFICATIONS

LPDDR3-based ePoP

Part number	Capacity		Standard		Package	FBGA	Operating temperature
	NAND (GB)	DRAM (Gb)	eMMC	DRAM	(mm)		
04EP04-N3GM627	4	4	5.0	LPDDR3	10x10x0.8	136	-25°C ~ +85°C
04EP08-N3GM627	4	8	5.0	LPDDR3	10x10x0.85	136	-25°C ~ +85°C
08EP08-N3GTC32*	8	8	5.1	LPDDR3	10x10x0.85	136	-25°C ~ +85°C
32EP08-N3GTC32	32	8	5.1	LPDDR3	10x10x0.85	136	-25°C ~ +85°C

LPDDR4x based ePoP

Part number	Capacity		Standard		Package	FBGA	Operating temperature
	NAND (GB)	DRAM (Gb)	eMMC	DRAM	(mm)		
08EP08-M4ETC32*	8	8	5.1	LPDDR4x	8x9.5x0.8	144	-25°C ~ +85°C
08CP08-M4ETC32*	8	8	5.1	LPDDR4x	8x9.5x0.85	144	-25°C ~ +85°C
16EP08-M4ETC32	16	8	5.1	LPDDR4x	8x9.5x0.8	144	-25°C ~ +85°C
32EP08-M4ETC32	32	8	5.1	LPDDR4x	8x9.5x0.8	144	-25°C ~ +85°C
16EP16-M4FTC32	16	16	5.1	LPDDR4x	8x9.5x0.8	144	-25°C ~ +85°C
32EP16-M4FTC32	32	16	5.1	LPDDR4x	8x9.5x0.8	144	-25°C ~ +85°C
32CP16-M4FTC32	32	16	5.1	LPDDR4x	8x9.5x0.85	144	-25°C ~ +85°C

*pSLC mode for higher endurance

THIS DOCUMENT SUBJECT TO CHANGE WITHOUT NOTICE.
©2022 Kingston Technology Europe Co LLP and Kingston Digital Europe Co LLP, Kingston Court, Brooklands Close, Sunbury-on-Thames, Middlesex, TW16 7EP, England. Tel: +44 (0) 1932 738888 Fax: +44 (0) 1932 785469 All rights reserved. All trademarks and registered trademarks are the property of their respective owners. MKF-960 EN

Downloaded from Arrow.com.