




+ CONNECTORS

SFP/SFP+/ZSFP+

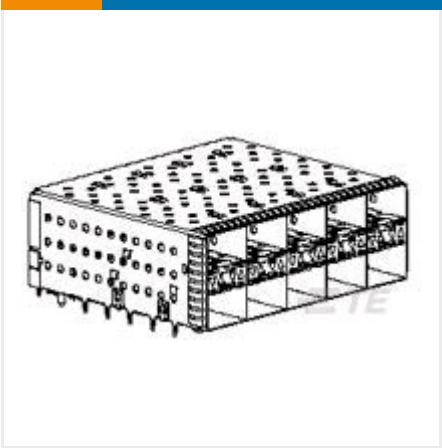

✓ Active

TE CONNECTIVITY (TE)
2X5 SFP+ w/ Springs, 4 LP Sn
SFP+ | SFP+ Enhanced EMI

2132403-5
TE Internal Number: 2132403-5

EU RoHS Compliant
EU ELV Compliant

Form Factor SFP+

Product Type Cage Assembly with Integrated Connector

Data Rate (Max) (Gb/s) 16

EMI Containment External Springs

Cage Type Stacked

↓ PRODUCT DRAWING
English

↓ 3D PDF

DOCUMENTATION

Product Drawings

CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI SPRINGS, PRESS FIT, 2X5, STACKED SFP+
PDF
English

CAD Files

3D PDF
PDF
3D

Customer View Model
2D_DXF.ZIP
English

Customer View Model

3D_IGS.ZIP

English

Customer View Model

3D_STP.ZIP

English

Product Specifications

Application Specification

Stacked Small Form-Factor Pluggable (SFP+) Connector And Cage Assembly

PDF

English

Product Specification

SFP+ Stacked Connector And Cage Assemblies

PDF

English

Qualification Test Report

SFP+ Stacked Connector And Cage Assemblies

PDF

English

Instruction Sheets

Instruction Sheet (U.S.)

Small Form-Factor Pluggable (SFP)+ Seating Tool Kits 2018280-[] For Stacked PT Connector And Cage Assemblies

PDF

English

Small Form-Factor Pluggable (SFP)+ ZSFP+ Extraction Tool Kits 2063048-[] And 2161405-1 For Stacked PT Connector And Cage Assemblies

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

- Form Factor SFP+
- Product Type Cage Assembly with Integrated Connector
- Cage Type Stacked
- Included Heat Sink No
- Integrated Lightpipes Yes

Configuration Features

- Port Matrix Configuration 2 x 5
- Lightpipe Configuration Four Triangular (Inner & Outer)
- Number of Ports 10

Electrical Characteristics

Data Rate (Max) (Gb/s) 16

Contact Features

Contact Mating Area Plating Material Gold or Gold Flash over Palladium Nickel

Contact Mating Area Plating Thickness (µm) .76

Tail Plating Material Tin

Termination Features

Termination Method to PC Board Through Hole - Press-Fit

Housing Features

Cage Material Nickel Silver

Dimensions

PCB Thickness (Recommended) 1.5 mm [.059 in]

Tail Length 3 mm [.118 in]

Operation/Application

Heat Sink Compatible No

Industry Standards

UL Flammability Rating UL 94V-0

Packaging Features

Packaging Method Box & Carton

Other

EMI Containment External Springs

Included Lightpipe Yes

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance
PDF