

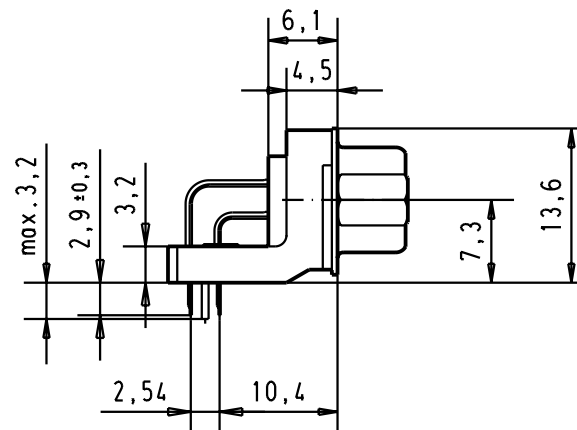


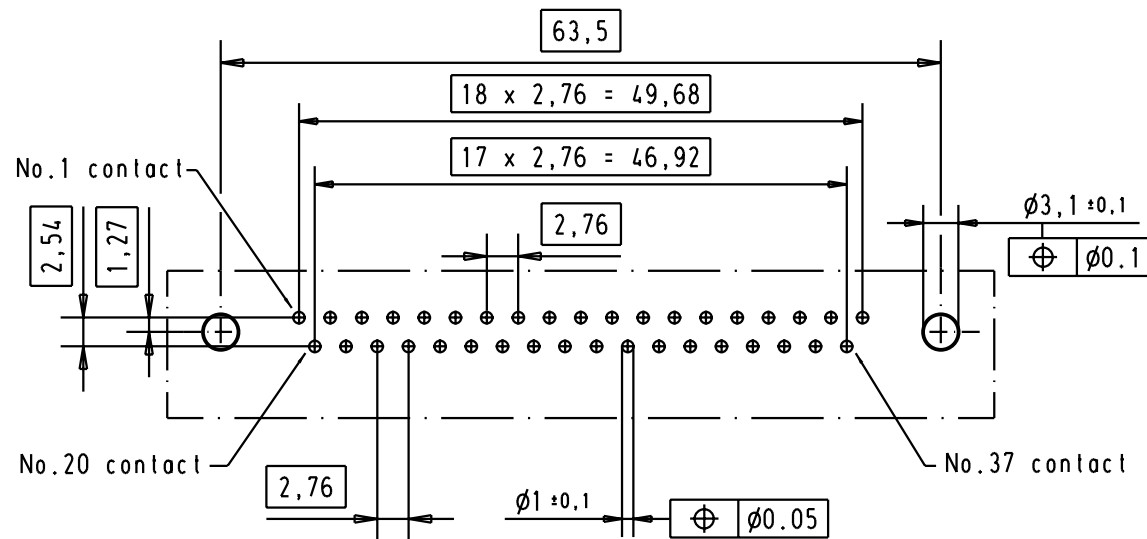

Printed board layout
component side

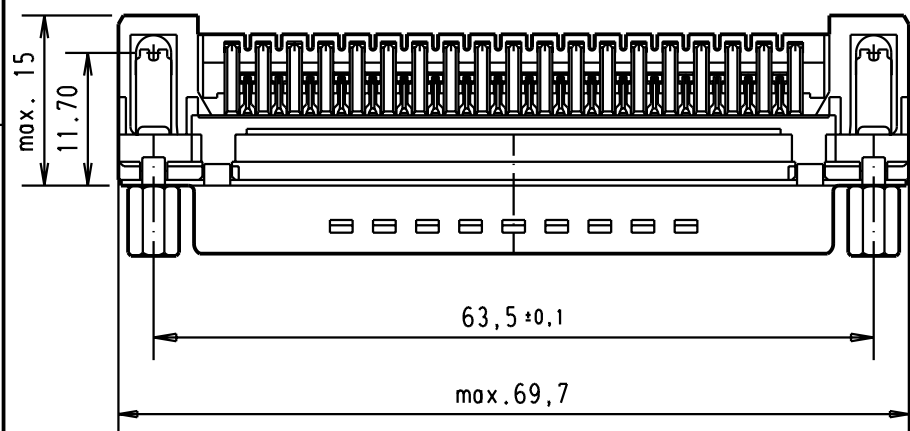

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 65 466 6833	M3	2					Del.	Name	 D-Sub, high temperature, male, standard, 37 poles, with solder pins 2.9, screw lock and grounding board lock	Maßstab/ Scale 1.5:1
09 65 466 7833	M3	3				Detail.	04/09/02	YT		
09 65 466 5833	M3	0.76 µm Au				Insp.				
09 65 466 6813	4-40 UNC	2				Stand.				
09 65 466 7813	4-40 UNC	3							 TB 0965466x8x3	Blatt/ Page 1/
09 65 466 5813	4-40 UNC	0.76 µm Au	31084	04/09/02	YT	HARTING EURL F-95972 Paris				
Part number	Screw lock thread	Performance level	Mod.	Del.	Name					
									Sub.	