

SMF Series



Agency Approvals


AGENCY	AGENCY FILE NUMBER
	E230531

Maximum Ratings and Thermal Characteristics
($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at $T_A=25^{\circ}\text{C}$ by 10/1000 μs (Note 1)	P_{PPM}	200	W
Thermal Resistance Junction- to-Ambient	$R_{\theta JA}$	220	$^{\circ}\text{C/W}$
Thermal Resistance Junction- to-Lead	$R_{\theta JL}$	100	$^{\circ}\text{C/W}$
Operating Temperature Range	T_J	-65 to 150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to 175	$^{\circ}\text{C}$

Notes:
1. Non-repetitive current pulse, per Fig. 4 and derated above T_J (initial) $=25^{\circ}\text{C}$ per Fig. 3.

Functional Diagram

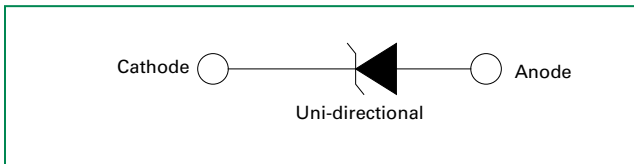

Description

The SMF series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

This SMF package has a 50% smaller footprint as compared to the SMA package and delivers one of the lowest height profiles (1.1mm) available in the industry.

Features

- Compatible with industrial standard package SOD-123FL
- Optimized surface mount footprint for minimal PCB space impact
- Low profile: maximum height of 1.1mm.
- Low inductance, excellent clamping capability
- Compatible with high temperature reflow soldering (260 $^{\circ}\text{C}$ /40sec)
- Typical failure mode due to exceeding maximum ratings is a short circuit condition
- Whisker test conducted based on Table 4a and 4c of JEDEC JESD201A
- IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- EFT protection of data lines in accordance with IEC 61000-4-4
- 200W peak pulsepower capability at 10/1000 μs waveform, repetition rate (duty cycle): 0.01 %
- Fast response time: typically less than 1.0ns from 0 Volts to V_{BR} min
- Glass passivated junction
- Built-in strain relief
- UL Recognized epoxy meeting flammability classification V-0
- Meet MSL level1, per J-STD-020, LF maximum peak of 260 $^{\circ}\text{C}$
- Matte tin lead-free plated
- Halogen-free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/ JEDEC J-STD-609A.01)

Applications

SMF components are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuit used in cellular phones, portable devices, business machines, power supplies and other consumer applications.

Additional Information



Datasheet




Resources



Samples


Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Part Number	Marking Code	Breakdown Voltage V_{BR} (Volts) @ I_T		Test Current I_T (mA)	Reverse Stand off Voltage V_R (V)	Maximum Reverse Leakage @ V_R I_R (μA)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Clamping Voltage @ I_{PP} V_C (V)	Agency Approval 
		MIN	MAX						
SMF5.0A	AE	6.40	7.00	10	5.0	400	21.7	9.2	X
SMF6.0A	AG	6.67	7.37	10	6.0	400	19.4	10.3	X
SMF6.5A	AK	7.22	7.98	10	6.5	250	17.9	11.2	X
SMF7.0A	AM	7.78	8.60	10	7.0	100	16.7	12.0	X
SMF7.5A	AP	8.33	9.21	1	7.5	50	15.5	12.9	X
SMF8.0A	AR	8.89	9.83	1	8.0	25	14.7	13.6	X
SMF8.5A	AT	9.44	10.40	1	8.5	10	13.9	14.4	X
SMF9.0A	AV	10.00	11.10	1	9.0	5	13.0	15.4	X
SMF10A	AX	11.10	12.30	1	10	2.5	11.8	17.0	X
SMF11A	AZ	12.20	13.50	1	11	2.5	11.0	18.2	X
SMF12A	BE	13.30	14.70	1	12	2.5	10.1	19.9	X
SMF13A	BG	14.40	15.90	1	13	1.0	9.3	21.5	X
SMF14A	BK	15.60	17.20	1	14	1.0	8.6	23.2	X
SMF15A	BM	16.70	18.50	1	15	1.0	8.2	24.4	X
SMF16A	BP	17.80	19.70	1	16	1.0	7.7	26.0	X
SMF17A	BR	18.90	20.90	1	17	1.0	7.2	27.6	X
SMF18A	BT	20.00	22.10	1	18	1.0	6.8	29.2	X
SMF20A	BV	22.20	24.50	1	20	1.0	6.2	32.4	X
SMF22A	BX	24.40	26.90	1	22	1.0	5.6	35.5	X
SMF24A	BZ	26.70	29.50	1	24	1.0	5.1	38.9	X
SMF26A	CE	28.90	31.90	1	26	1.0	4.8	42.1	X
SMF28A	CG	31.10	34.40	1	28	1.0	4.4	45.4	X
SMF30A	CK	33.30	36.80	1	30	1.0	4.1	48.4	X
SMF33A	CM	36.70	40.60	1	33	1.0	3.8	53.3	X
SMF36A	CP	40.00	44.20	1	36	1.0	3.4	58.1	X
SMF40A	CR	44.40	49.10	1	40	1.0	3.1	64.5	X
SMF43A	CT	47.80	52.80	1	43	1.0	2.9	69.4	X
SMF45A	CV	50.00	55.30	1	45	1.0	2.8	72.7	X
SMF48A	CX	53.30	58.90	1	48	1.0	2.6	77.4	X
SMF51A	CZ	56.70	62.70	1	51	1.0	2.4	82.4	X
SMF54A	DE	60.00	66.30	1	54	1.0	2.3	87.1	X
SMF58A	RG	64.40	71.20	1	58	1.0	2.1	93.6	
SMF60A	RK	66.70	73.70	1	60	1.0	1.8	96.8	
SMF64A	RM	71.10	78.60	1	64	1.0	1.7	103.0	
SMF70A	RP	77.80	86.00	1	70	1.0	1.5	113.0	
SMF75A	RR	83.30	92.10	1	75	1.0	1.4	121.0	
SMF78A	RT	86.70	95.80	1	78	1.0	1.4	126.0	
SMF85A	RV	94.40	104.00	1	85	1.0	1.3	137.0	

Notes:

- V_{BR} measured after I_T applied for 300 μs , I_T = square wave pulse or equivalent.
- Surge current waveform per 10/1000 μs exponential wave and derated per Fig.2.
- All terms and symbols are consistent with ANSI/IEEE C62.35.

I-V Curve Characteristics

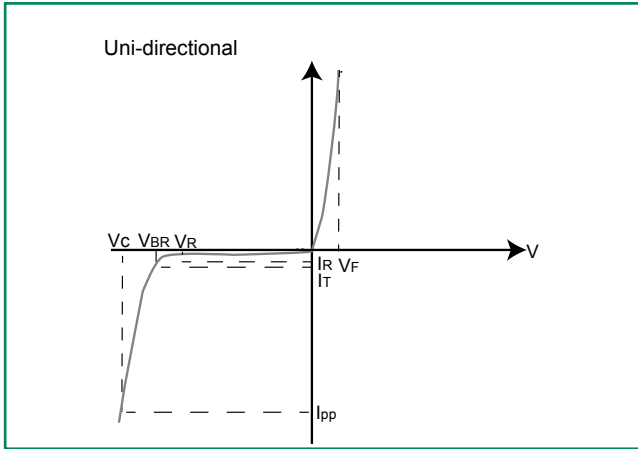

- P_{PPM} Peak Pulse Power Dissipation** – Max power dissipation
- V_R Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation
- V_{BR} Breakdown Voltage** – Maximum voltage that flows through the TVS at a specified test current (I_T)
- V_C Clamping Voltage** – Peak voltage measured across the TVS at a specified I_{ppm} (peak impulse current)
- I_R Reverse Leakage Current** – Current measured at V_R
- V_F Forward Voltage Drop for Uni-directional**

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 - TVS Transients Clamping Waveform


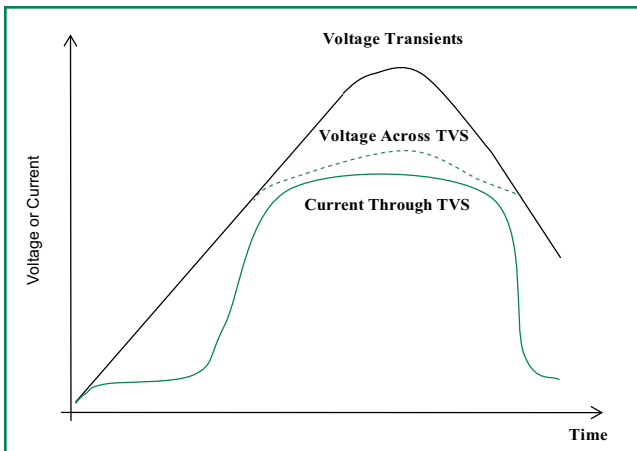


Figure 2 - Peak Pulse Power Rating Curve

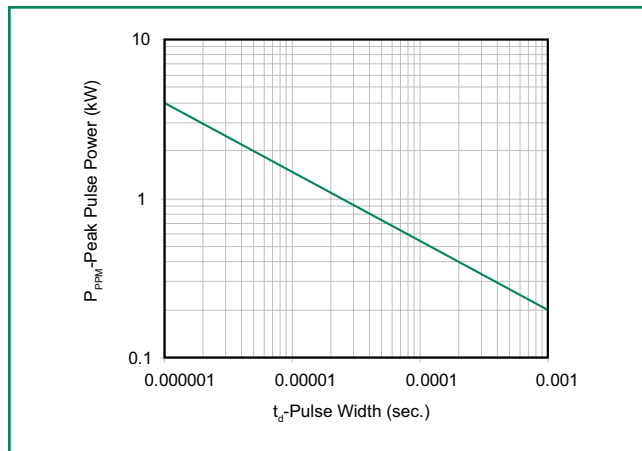

continues on next page.

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)

Figure 3 - Peak Pulse Power Derating Curve

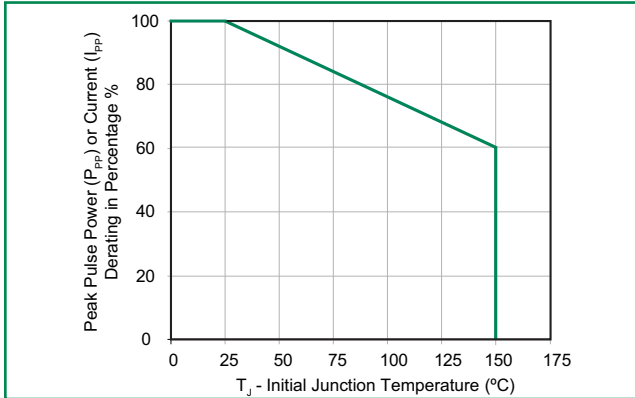


Figure 4 - Pulse Waveform - 10/1000 μS

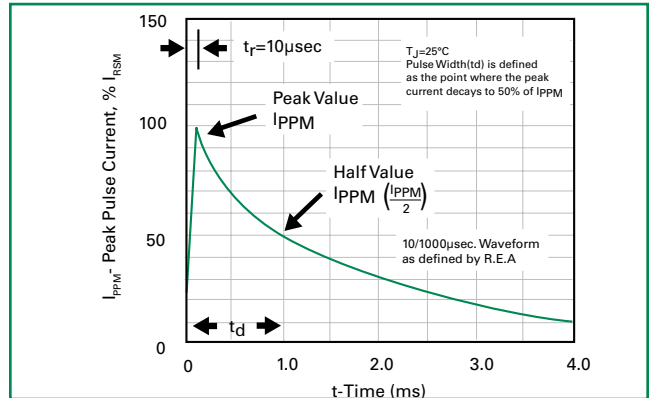


Figure 5 - Forward Voltage

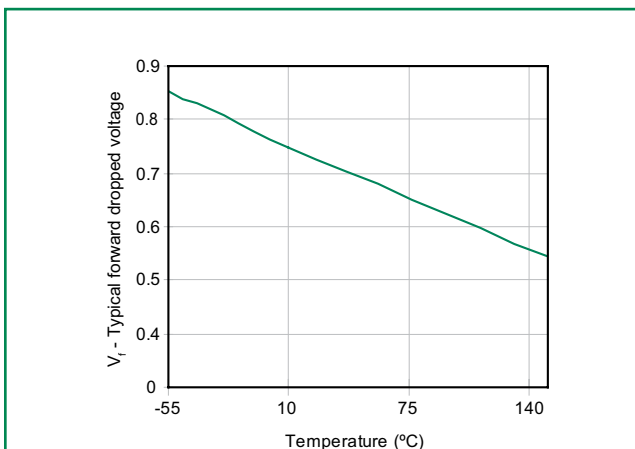


Figure 6 - Typical Junction Capacitance

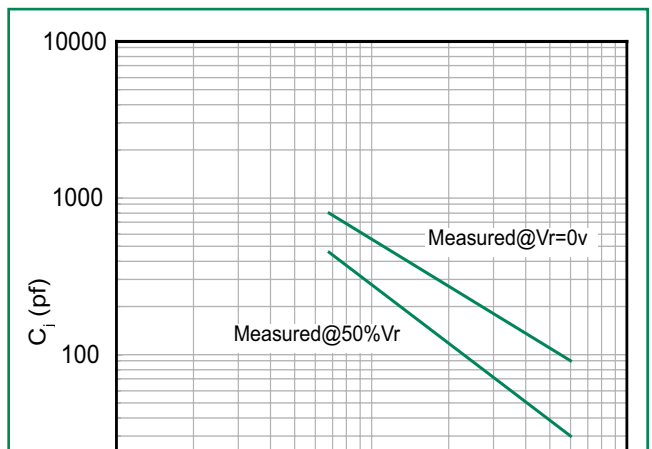


Figure 7 - Peak Forward Voltage Drop vs. Peak Forward Current



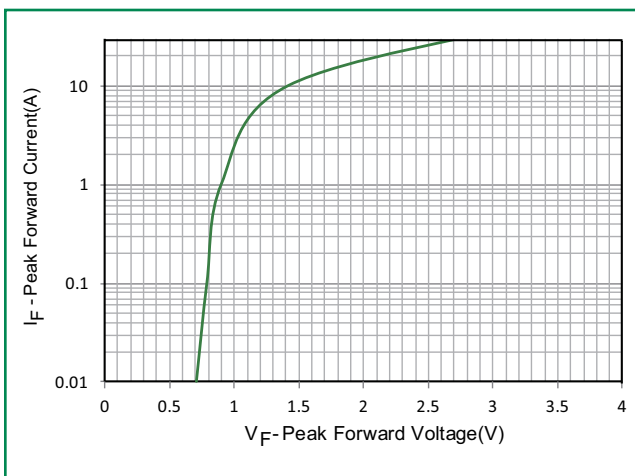


Figure 8 - Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

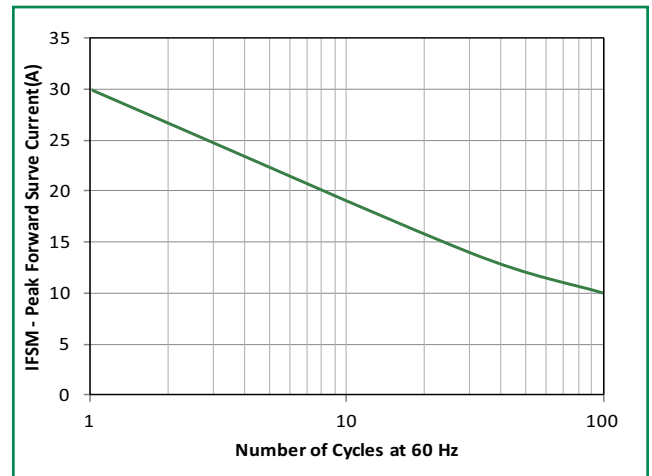

Soldering Parameters

Reflow Condition		Lead-free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_A) to peak)		3°C/second max
$T_{s(max)}$ to T_A - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_A) (Liquidus)	217°C
	- Time (min to max) (t_s)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

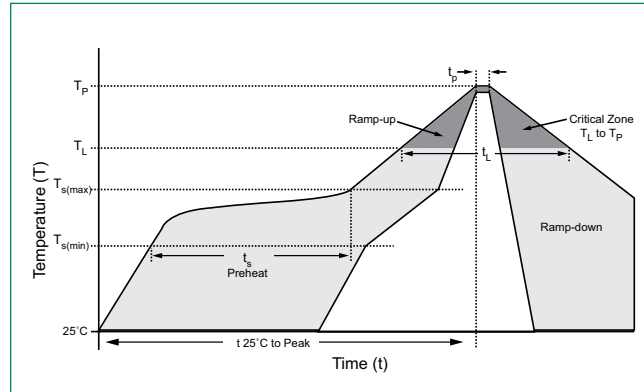


Physical Specifications

Case	SOD-123FL plastic over glass passivated junction
Polarity	Color band denotes cathode except bipolar
Terminal	Matte tin-plated leads, solderable per JESD22-B102


Environmental Specifications

High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Temperature Cycling	JESD22-A104
MSL	JEDEC-J-STD-020, Level 1
H3TRB	JESD22-A101
RSH	JESD22-A111

Dimensions - SOD-123FL Package




Mounting Pad Layout

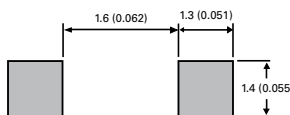


Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A	2.50	2.90	0.0984	0.1142
B	3.40	3.90	0.1339	0.1535
C	0.70	1.20	0.0275	0.0472
D	1.50	2.00	0.0591	0.0787
E	0.35	0.90	0.0138	0.0354
F	0.05	0.26	0.0020	0.0102
G	0.00	0.10	0.000	0.0039
H	0.95	1.10	0.0374	0.0433

Part Numbering System

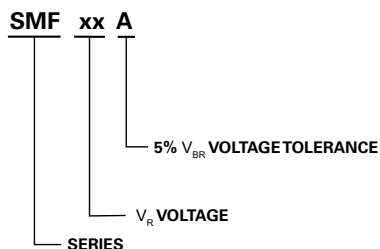


Part Marking System



Packaging Options

Part number	Component Package	Quantity	Packaging Option	Packaging Specification
SMFXXX	SOD-123FL	3000	Tape & Reel – 8mm tape/7" reel	EIA RS-481
SMFXXX-T13	SOD-123FL	10000	Tape & Reel – 8mm tape/13" reel	EIA RS-481

Tape and Reel Specification

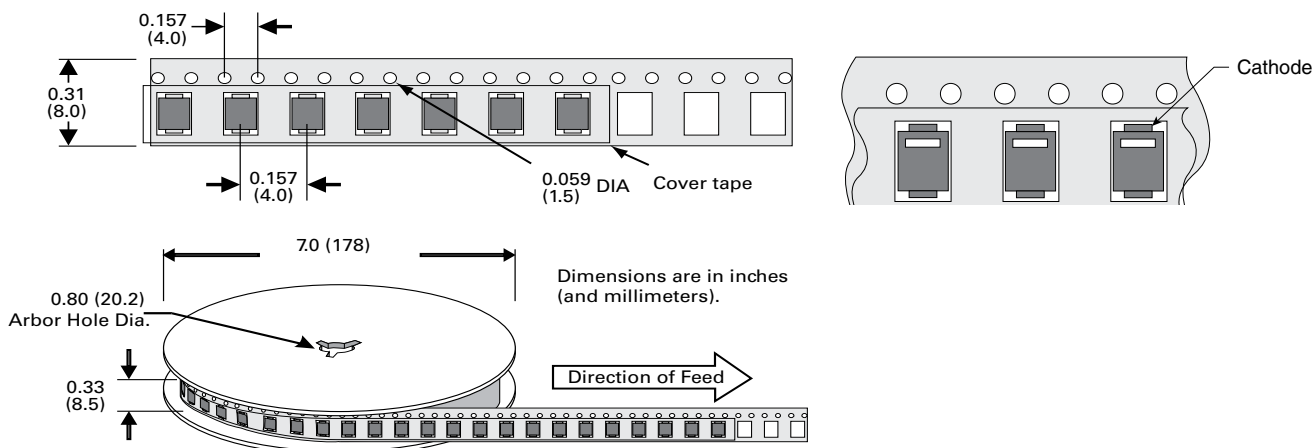

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.