

868 MHz Ceramic Chip Antenna



ACAG1204-868-T

12.0 x 4.0 x 1.6mm
Pb | **RoHS/RoHS II Compliant**
MSL = 1

FEATURES

- Uses Low Temperature Co-Fired Ceramic (LTCC) Technology
- Gain of 2.63 dBi
- Omni-directional
- VSWR of ≤ 2.0



APPLICATIONS

- ISM applications
- LORA
- Sigfox
- RFID

ELECTRICAL SPECIFICATIONS

Item	Specification
Frequency	868MHz
Bandwidth	20MHz typ
VSWR	≤ 2.0
Impedance	50 Ω
Gain	2.63dBi
Azimuth	Omni-directional
Polarization	Linear
Operating Temperature range	-40°C ~+ 85°C

DIMENSIONS

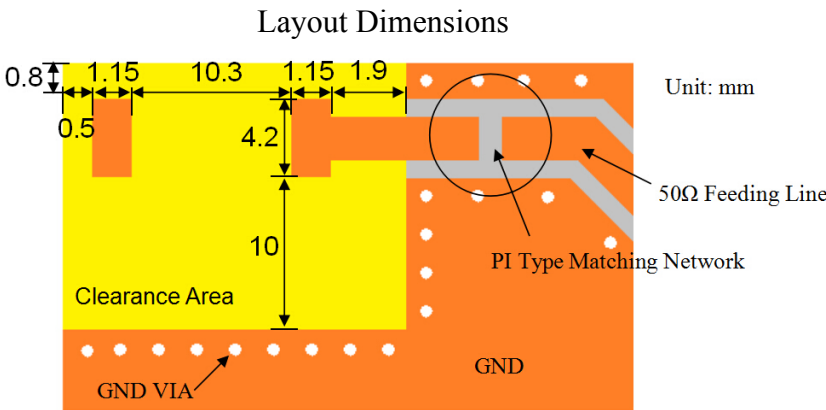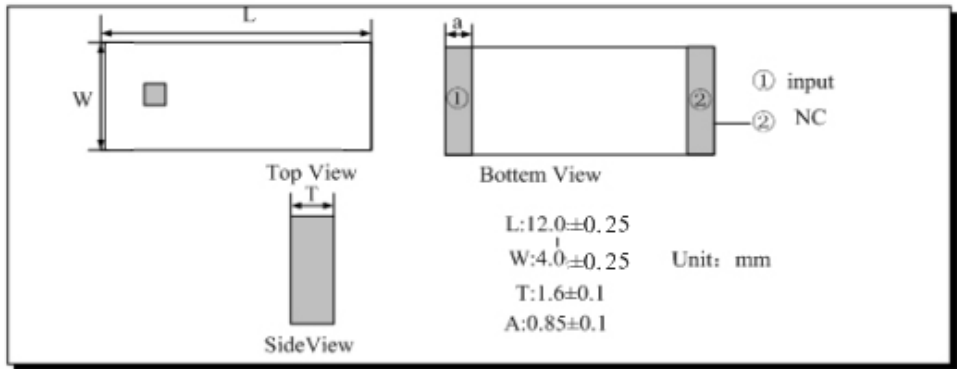

Unit: mm




5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.12.2018

ABRACON IS
ISO9001-2015
CERTIFIED

868 MHz Ceramic Chip Antenna




ACAG1204-868-T




12.0 x 4.0 x 1.6mm
RoHS/RoHS II Compliant
MSL = 1

EVALUATION BOARD AND MATCHING CIRCUITS

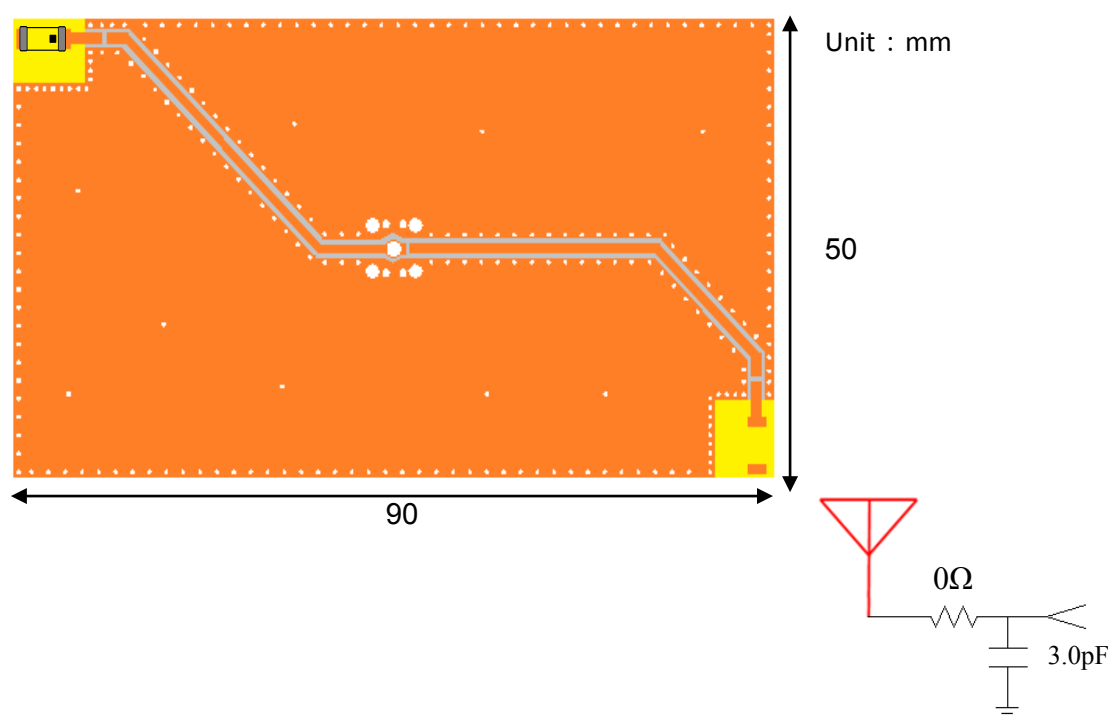

ANTENNA RESPONSE – SMITH CHART AND RETURN LOSS S11

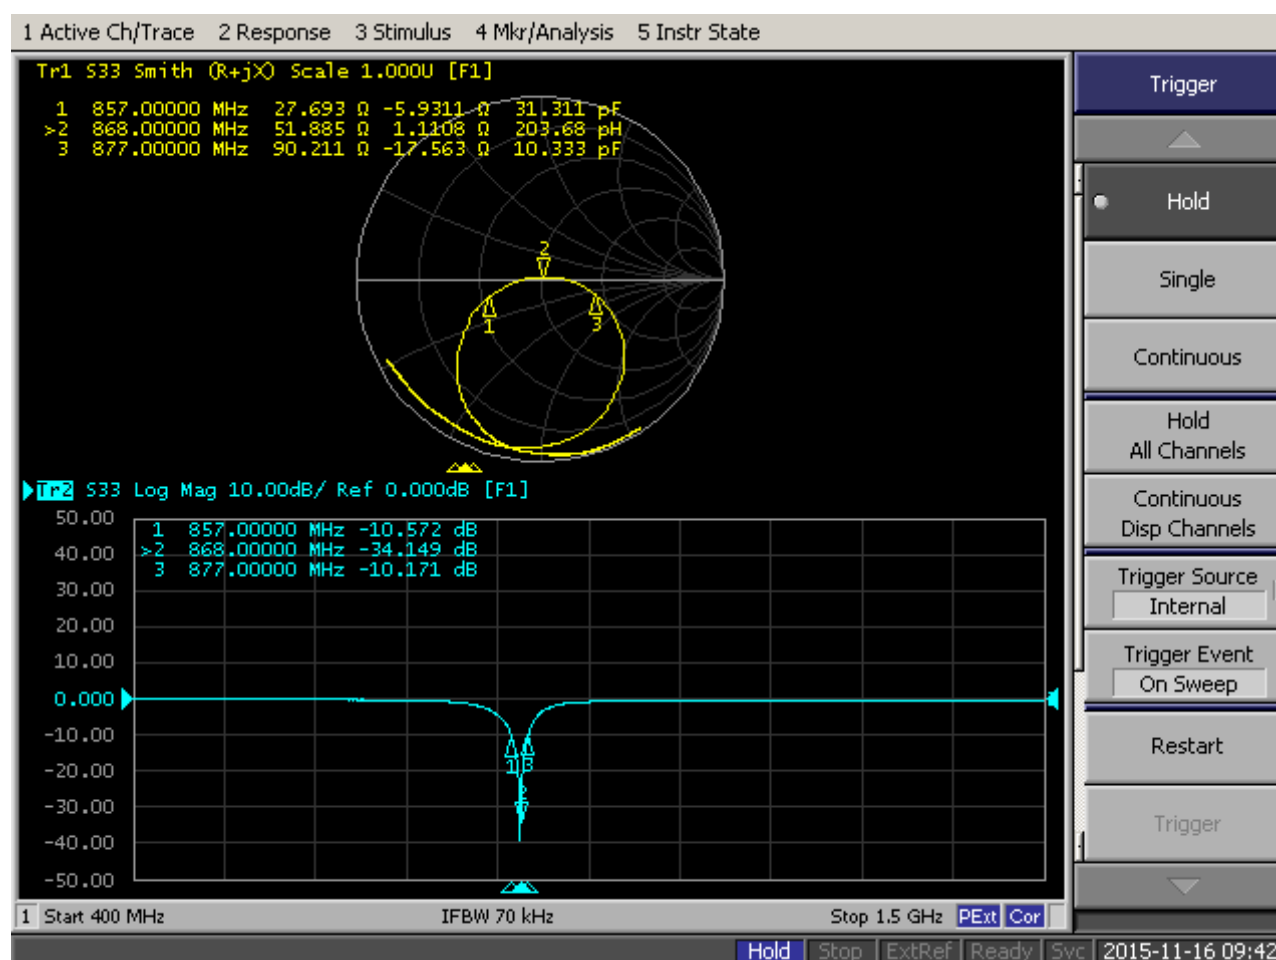

5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.12.2018

ABRACON IS
ISO9001-2015
CERTIFIED



868 MHz Ceramic Chip Antenna

ACAG1204-868-T

12.0 x 4.0 x 1.6mm
RoHS/RoHS II Compliant
MSL = 1





RADIATION PATTERNS

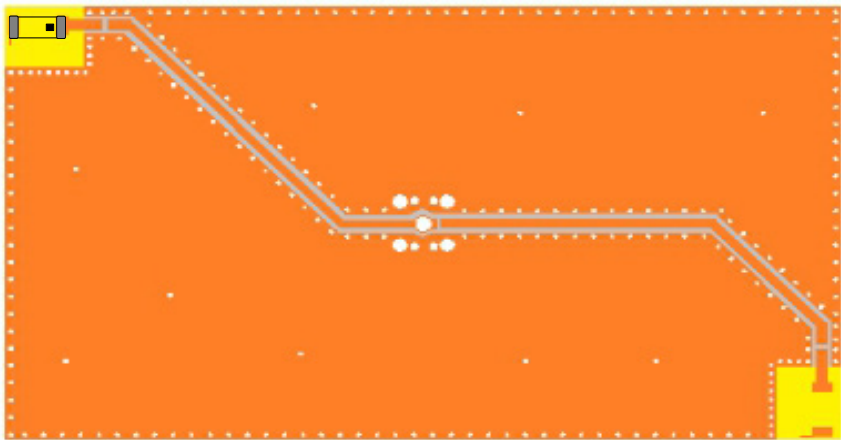



X-Z Plane

Y-Z Plane

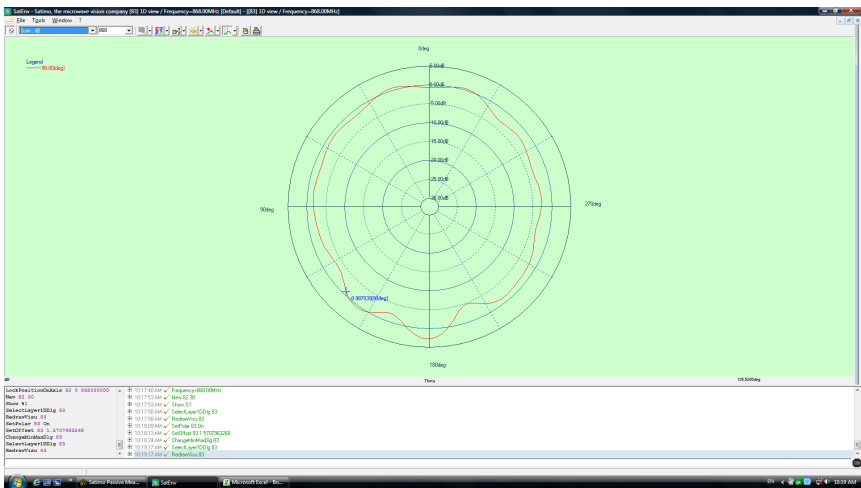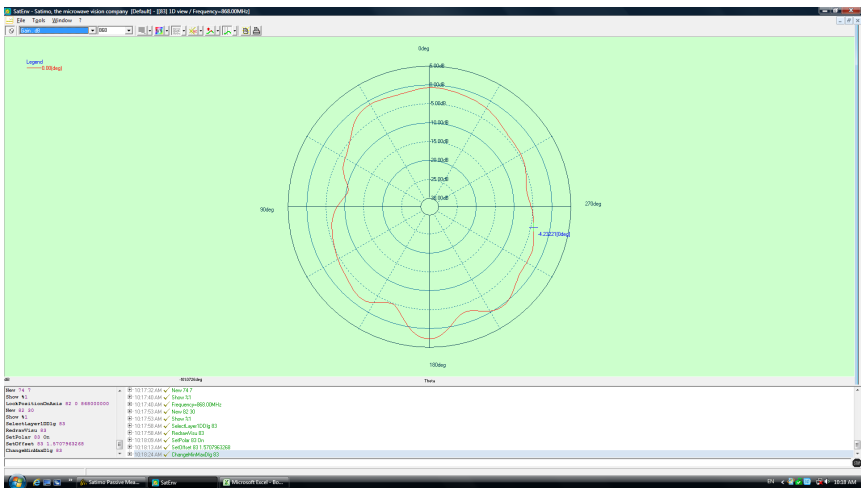

X-Y Plane

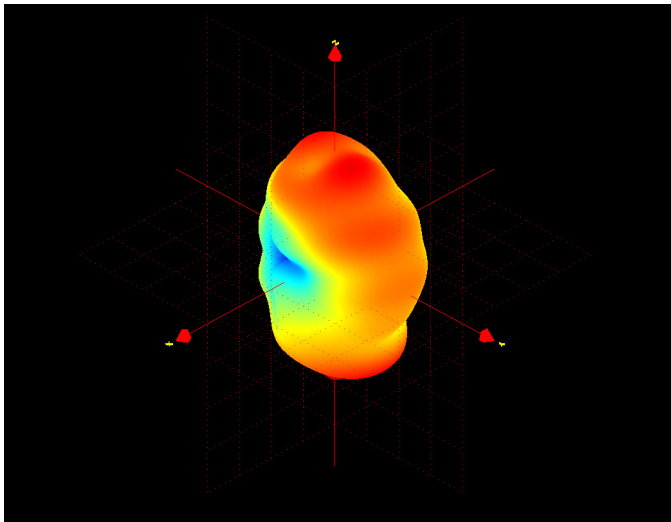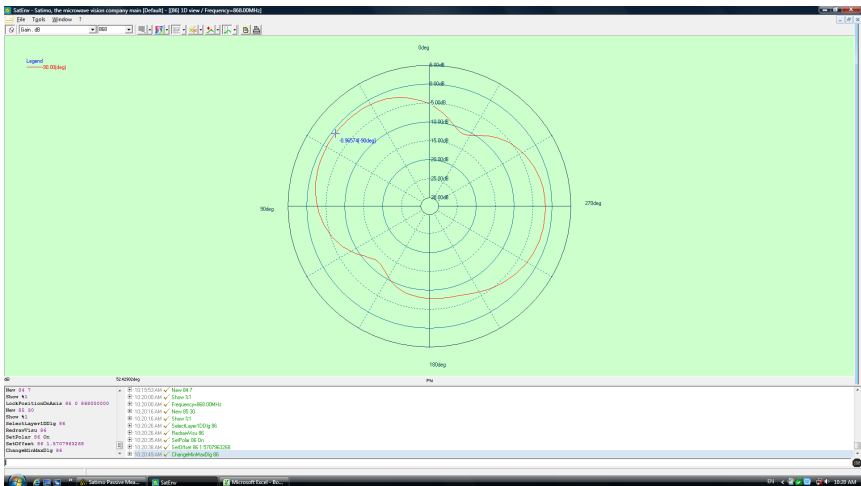

Frequency (MHz)	858	868	878
Avg. Gain (dBi)	-2.68	-2.05	-2.72
Peak Gain (dBi)	2.35	2.63	2.26
Efficiency (%)	48	52	50



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.12.2018

ABRACON IS
ISO9001-2015
CERTIFIED


868 MHz Ceramic Chip Antenna



ACAG1204-868-T

Pb | **12.0 x 4.0 x 1.6mm**
RoHS/RoHS II Compliant
MSL = 1



REFLOW PROFILE

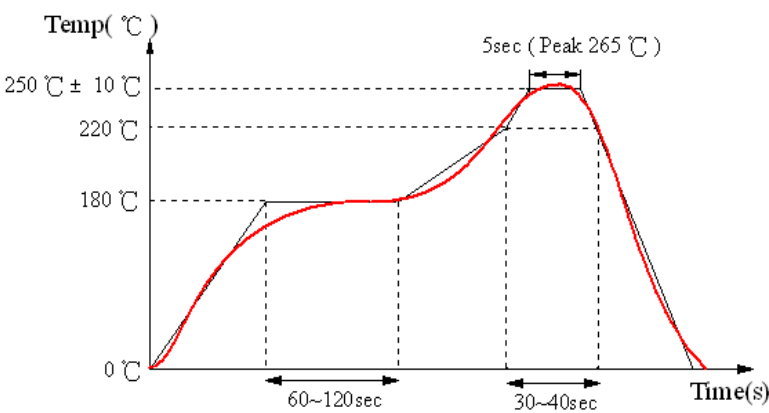


PACKAGING

Package Type	Quantity/Size
Inner Box	3000 pcs/reel
Carton	15000 pcs/carton
Size of the carton	345 x 250 x 360 mm

Tape Dimensions (mm)

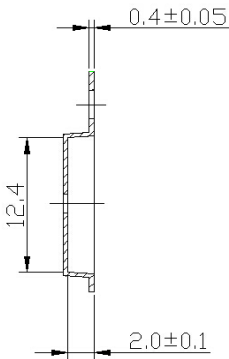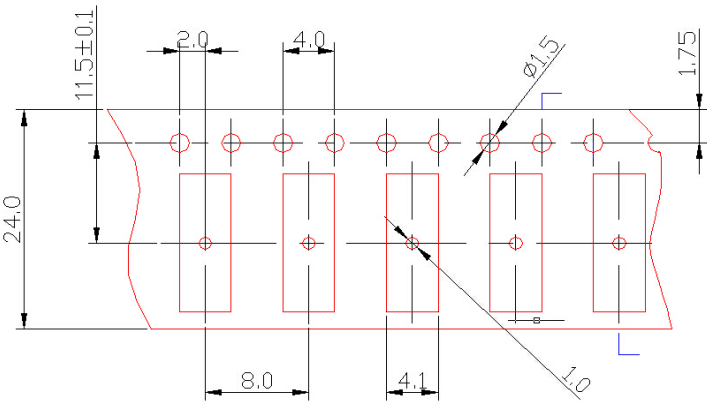

Reel Dimensions (mm)

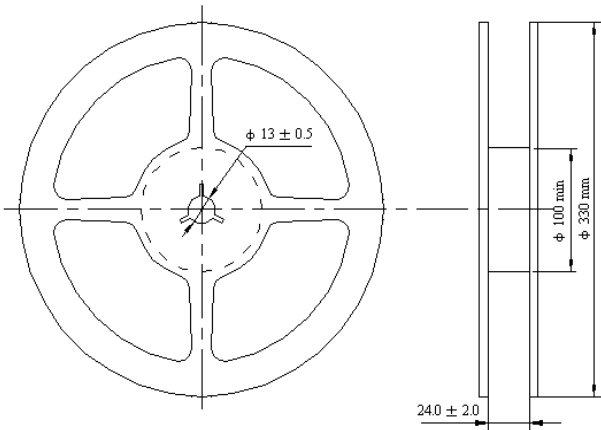

Unit: mm

CAUTIONS

- Static voltage**
Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.
- Ultrasonic cleaning**
Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.
- Soldering**
Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as on the patterns as this will change the performance of the antenna.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.12.2018

ABRACON IS
ISO9001-2015
CERTIFIED