

**Description: 1608 Diplexer**
**PART NUMBER: DPX1608LKV7R2460A**
**Features:**

- Compact Size
- Low loss
- High Soldering Heat Resistance

**Applications:**

- wireless

**ELECTRICAL SPECIFICATIONS**
**Low-Band**

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	2400~2500	-	0.65	1
Return Loss (dB)	2400~2500	10	14.9	-
Attenuation (dB)	1164~1300	15	21.8	-
	1559~1601	13	17.2	-
	4800~7100	20	23.9	-
	7200~7500	20	27.6	-
	9600~10000	20	25.6	-

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**CONFIDENTIAL AND PROPRIETARY INFORMATION**

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
 15255 Innovation Drive #100  
 San Diego, CA 92128  
 USA  
 Tel: 1-858-674-8100

Pulse/Larsen Antennas  
 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
 Vancouver, WA 98683  
 USA  
 Tel: 1-360-944-7551

Europe Headquarters  
 Pulse GmbH & Do, KG  
 Zeppelinstrasse 15  
 Herrenberg, Germany  
 Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
 99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
 Suzhou New District  
 Jiangsu Province, Suzhou 215009 PR China  
 Tel: 86 512 6807 9998



**Description: 1608 Diplexer**
**PART NUMBER: DPX1608LKV7R2460A**
**ELECTRICAL SPECIFICATIONS**
**High-Band**

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	5150~5300	-	1.29	1.5
	5925~6425	-	1.03	1.2
	6525~6875	-	0.77	1.2
	6875~7125	-	0.97	1.2
Return Loss (dB)	5150~7125	10	14.2	-
Attenuation (dB)	824~849	35	55.5	-
	1164~1600	30	40.1	-
	1601~2400	30	40.1	-
	2400~2500	35	45.4	-
	2501~3299	26	32.6	-
	3300~4200	28	34.7	-
	9800~14250	20	30.9	-
	14700~21375	10	18.4	-

**Common**

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Return Loss (dB)	2400~2500	10	17	-
	5150~7125	10	15.2	-

**Isolation**

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Low to High (dB)	2400~2500	40	44.8	-
	4800~7100	20	26.4	-

Operating Temperature Range : -40~85°C




Power Capacity : 3W max.

## Description: 1608 Diplexer

**PART NUMBER: DPX1608LKV7R2460A**

### MECHANICAL DIMENSION

#### Outline

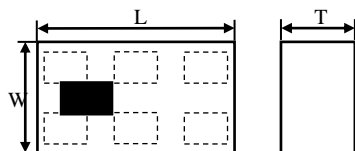


#### Dimension

L	W	T	a
1.60±0.10	0.80±0.10	0.70 max.	0.35±0.05
b	c	d	
0.22±0.05	0.225±0.05	0.22±0.05	

NOTE : Dimensions in mm.

#### Termination

Top View





#### Terminal name

#### Function

1	Low band
2	GND
3	High band
4	GND
5	Common
6	GND

### Reference design of EVB

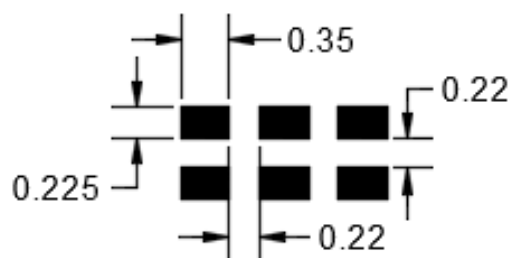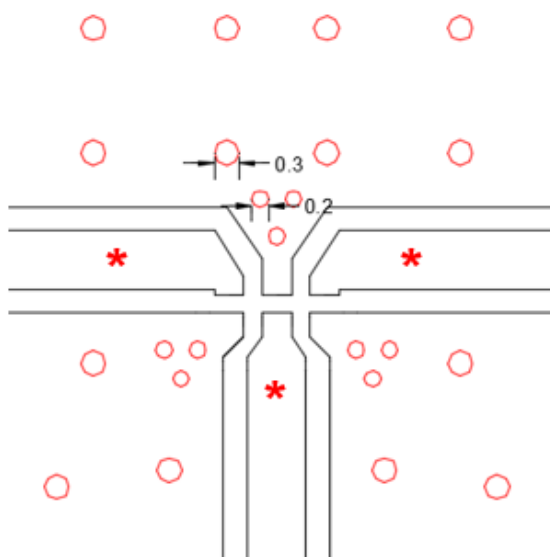

Unit : mm

\*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 1608 Diplexer


PART NUMBER: DPX1608LKV7R2460A

## MEASURING DIAGRAM

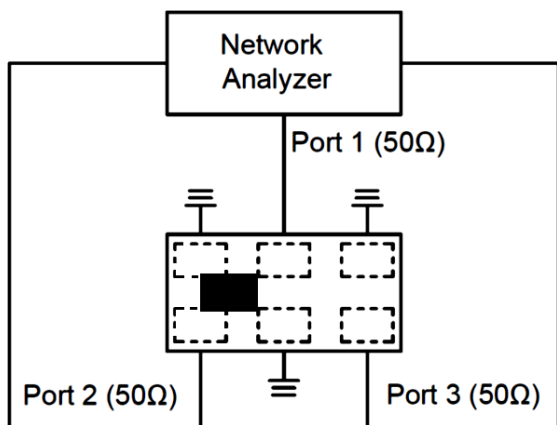

Test Instrument :  
Agilent E5071C Network Analyzer or equivalent.

## ELECTRICAL PERFORMANCES

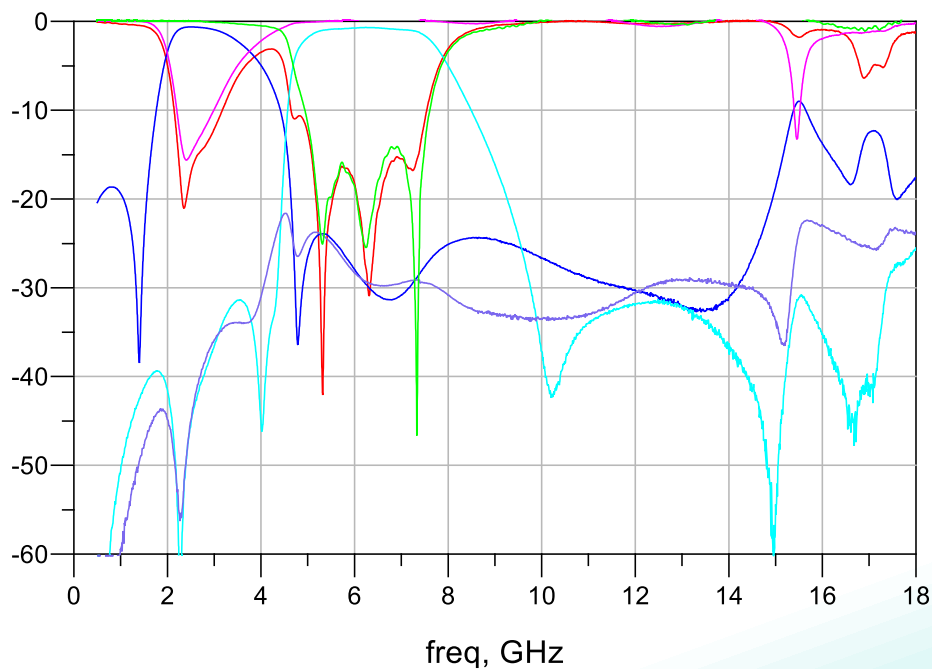

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## Description: 1608 Diplexer

### PART NUMBER: DPX1608LKV7R2460A


## PACKING SPECIFICATION

### Peel-off force

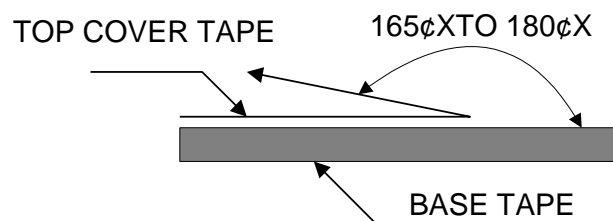

The force for peeling of cover tape is 10 grams in the arrow direction.


### Dimension (Unit: mm)

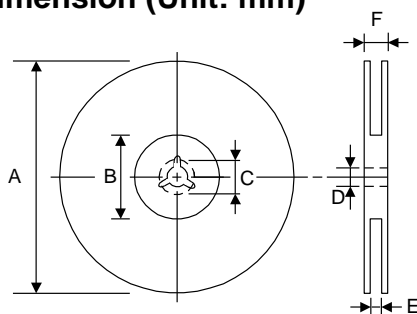

TYPE	A	B	C	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

### Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

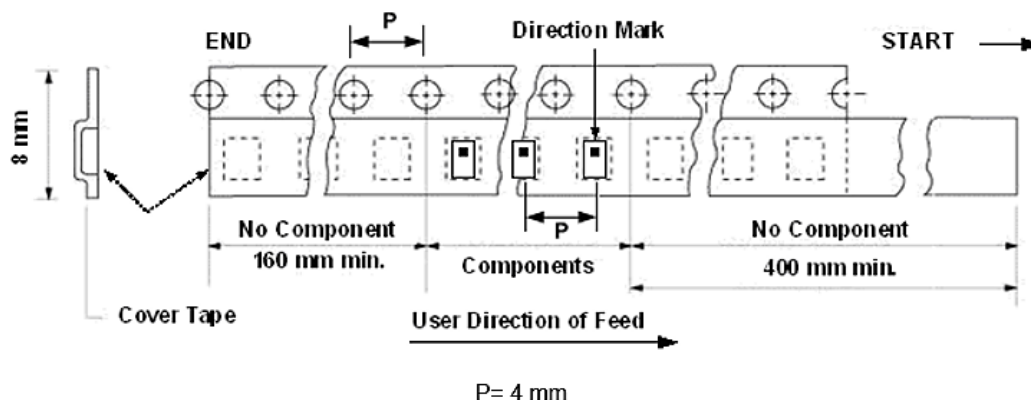

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description:** 1608 Diplexer**PART NUMBER:** DPX1608LKV7R2460A**REVISION HISTORY**

Revision	Date	Description
Version 1	Mar. 02, 2023	- New issue