SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

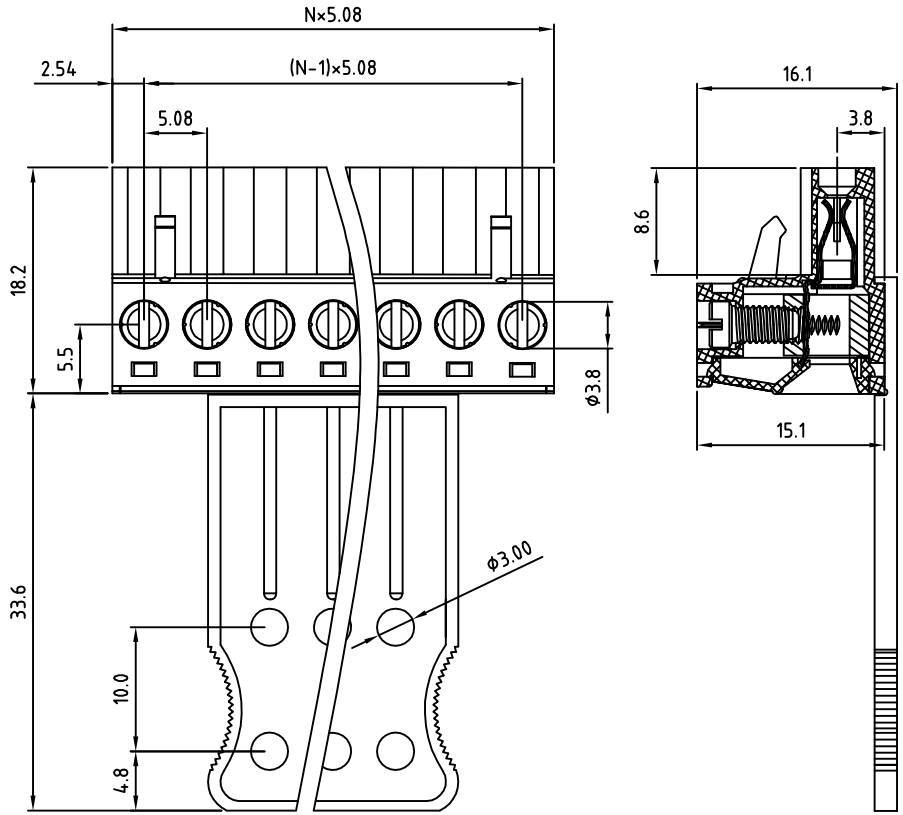

Material

- Terminal body(metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: PhBz ,Tin plated
- Insulator (Cover): Thermoplastic (UL94V-0)
- Insulator (Body): Thermoplastic (UL94V-0)
- Handle: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
  Solid wire(AWG): 12-24
  Stranded wire(AWG): 12-24
- Torque: 5Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: c UL us

RoHS Compliant

PART NUMBER:

OSTTJXX5154

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green (Standard)
... ...	6: Blue
24 24 Poles	8: Grey

POLES	Handle width
2P-4P	2P
5P-9P	5P
10P-15P	8P
16P-24P	12P

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	OSTTJ 5.08mm Series with handle type				
PART NO.	OSTTJXX5154			DWG NO.	OSTTJXX5154.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Kind 2008.10.06	Kind 2008.10.06	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B	Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°

Downloaded from Arrow.com.