


Data Sheet | Item Number: 734-236

THT male header; 1.0 x 1.0 mm solder pin; straight; 100% protected against mis-mating; Pin spacing 3.81 mm; 6-pole; orange


<https://www.wago.com/734-236>



Color: ■ orange

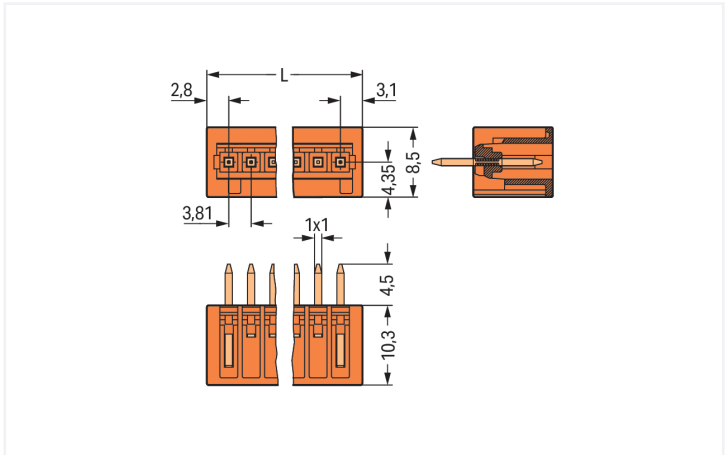

Dimensions in mm
 $L = (\text{pole no.} - 1) \times \text{pin spacing} + 5.9 \text{ mm}$

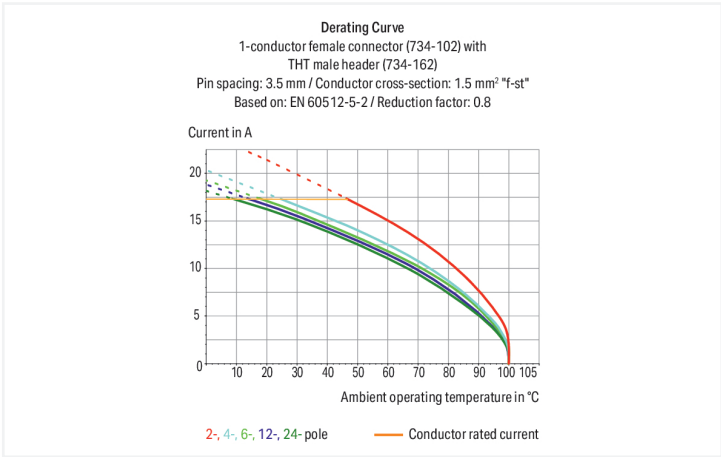

Stiftleiste Serie 734, orange

Bei dieser Stiftleiste mit der Artikelnummer 734-236 ist eine fehlerfreie Elektroinstallation das Hauptaugenmerk. Setzen Sie beim Design-In Ihres Gerätes auf erprobte Sicherheit: Mit Leiterplatten-Steckverbindern erhalten Sie verschiedene Verwendungsmöglichkeiten. Die Maße sind in Breite x Höhe x Tiefe (24,95 x 14,8 x 8,5) mm. Für die Kontaktoberfläche wurde Zinn eingesetzt. Das MCS – "Multi Connection System" von WAGO ist ein vielfältiges Steckverbindersystem für Ihre durchgängige Systemverdrahtung. Es ermöglicht Ihnen eine vereinfachte Verdrahtung in der Kabelvorkonfektionierung und auf Geräten durch zwei Betätigungsrichtungen für die CAGE CLAMP®-Varianten. Die Verlötlung des Leiterplatten-Steckverbinders erfolgt mittels THT.

Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .



Electrical data						
Ratings per			IEC/EN 60664-1			
Overvoltage category	III	III	II			
Pollution degree	3	2	2			
Nominal voltage	160 V	160 V	320 V			
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV			
Rated current	10 A	10 A	10 A			

Approvals per			UL 1059			
Use group	B	C	D			
Rated voltage	300 V	-	300 V			
Rated current	10 A	-	10 A			

Approvals per			CSA			
Use group	B	C	D			
Rated voltage	300 V	-	300 V			
Rated current	10 A	-	10 A			

Connection data						
Total number of potentials	6					
Number of connection types	1					
Number of levels	1					

Connection 1			
Pole number	6		

Physical data		
Pin spacing	3.81 mm / 0.15 inches	
Width	24.95 mm / 0.982 inches	
Height	14.8 mm / 0.583 inches	
Height from the surface	10.3 mm / 0.406 inches	
Depth	8.5 mm / 0.335 inches	
Solder pin length	4.5 mm	
Solder pin dimensions	1 x 1 mm	
Drilled hole diameter with tolerance	1.4 (+0.1) mm	

Mechanical data		
Variable coding	Yes	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Male connector/plug	
Connector (connection type)	for PCB	
Mismating protection	Yes	
Mating direction to the PCB	90 °	

PCB contact		
PCB contact	THT	
Solder pin arrangement	over the entire male connector (in-line)	
Number of solder pins per potential	1	



Material data		
Note (material data)		Information on material specifications can be found here
Color		orange
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Contact material		Electrolytic copper (E _{CU})
Contact Plating		Tin
Fire load		0.026 MJ
Weight		1.5 g

Environmental requirements																																								
Limit temperature range	-60 ... +100 °C	<table><tr><th colspan="2">Environmental Testing (Environmental Conditions)</th></tr><tr><td>Test specification Railway applications – Rolling stock – Electronic equipment</td><td>DIN EN 50155 (VDE 0115-200):2022-06</td></tr><tr><td>Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests</td><td>DIN EN 61373 (VDE 0115-0106):2011-04</td></tr><tr><td>Spectrum/Installation location</td><td>Service life test, Category 1, Class A/B</td></tr><tr><td>Function test with noise-like vibration</td><td>Test passed according to Section 8 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>10 min. 5 h</td></tr><tr><td>Test directions</td><td>X, Y and Z axes X, Y and Z axes X, Y and Z axes</td></tr><tr><td>Monitoring for contact faults/interruptions</td><td>Passed</td></tr><tr><td>Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Simulated service life test through increased levels of noise-like vibration</td><td>Test passed according to Section 9 of the standard</td></tr><tr><td>Extended test scope: Monitoring for contact faults/interruptions</td><td>Passed Passed</td></tr><tr><td>Extended test scope: Voltage drop measurement before and after each axis</td><td>Passed Passed</td></tr><tr><td>Shock test</td><td>Test passed according to Section 10 of the standard</td></tr><tr><td>Shock form</td><td>Half sine</td></tr><tr><td>Shock duration</td><td>30 ms</td></tr><tr><td>Number of shocks per axis</td><td>3 pos. und 3 neg.</td></tr><tr><td>Vibration and shock stress for rolling stock equipment</td><td>Passed</td></tr></table>	Environmental Testing (Environmental Conditions)		Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04	Spectrum/Installation location	Service life test, Category 1, Class A/B	Function test with noise-like vibration	Test passed according to Section 8 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)	Test duration per axis	10 min. 5 h	Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes	Monitoring for contact faults/interruptions	Passed	Voltage drop measurement before and after each axis	Passed	Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard	Extended test scope: Monitoring for contact faults/interruptions	Passed Passed	Extended test scope: Voltage drop measurement before and after each axis	Passed Passed	Shock test	Test passed according to Section 10 of the standard	Shock form	Half sine	Shock duration	30 ms	Number of shocks per axis	3 pos. und 3 neg.	Vibration and shock stress for rolling stock equipment	Passed
Environmental Testing (Environmental Conditions)																																								
Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06																																							
Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04																																							
Spectrum/Installation location	Service life test, Category 1, Class A/B																																							
Function test with noise-like vibration	Test passed according to Section 8 of the standard																																							
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz f ₁ = 5 Hz to f ₂ = 150 Hz																																							
Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)																																							
Test duration per axis	10 min. 5 h																																							
Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes																																							
Monitoring for contact faults/interruptions	Passed																																							
Voltage drop measurement before and after each axis	Passed																																							
Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard																																							
Extended test scope: Monitoring for contact faults/interruptions	Passed Passed																																							
Extended test scope: Voltage drop measurement before and after each axis	Passed Passed																																							
Shock test	Test passed according to Section 10 of the standard																																							
Shock form	Half sine																																							
Shock duration	30 ms																																							
Number of shocks per axis	3 pos. und 3 neg.																																							
Vibration and shock stress for rolling stock equipment	Passed																																							
Processing temperature	-35 ... +60 °C																																							



Commercial data		
Product Group	3 (Multi Conn. System)	
PU (SPU)	100 pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4044918847919	
Customs tariff number	85366930000	

Product classification		
UNSPSC	39121409	
eCl@ss 10.0	27-44-04-02	
eCl@ss 9.0	27-44-04-02	
ETIM 9.0	EC002637	
ETIM 8.0	EC002637	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	EN 61984	NL-54190	Railway WAGO GmbH & Co. KG	-	Railway Ready
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-105522			
UL Underwriters Laboratories Inc.	UL 1977	E 45171			

Approvals for marine applications

		
Approval	Standard	Certificate Name
DNV DNV GL SE	-	TAE000016Z
LR Lloyds Register	IEC 61984	96/20035 (E5)



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 734-236			

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data

CAD data			
2D/3D Models 734-236			

CAE data	
EPLAN Data Portal 734-236	
ZUKEN Portal 734-236	

PCB Design	
Symbol and Footprint via SamacSys 734-236	
Symbol and Footprint via Ultra Librarian 734-236	

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: 734-206
1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; 1,50 mm²; orange



Item No.: 734-206/037-000
1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; 1,50 mm²; orange



Item No.: 2734-206
1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; 1,50 mm²; orange



Item No.: 2734-206/031-000
1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; clamping collar; 1,50 mm²; orange



Item No.: 2734-206/037-000
1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; Lateral locking levers; 1,50 mm²; orange



Item No.: 734-566
THT female header; angled; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; 0.9 x 0.9 mm solder pin; orange



Item No.: 734-566/037-000
THT female header; angled; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; Locking lever; 0.9 x 0.9 mm solder pin; orange



Item No.: 734-506
THT female header; straight; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; 0.9 x 0.9 mm solder pin; orange



Item No.: 734-506/037-000
THT female header; straight; Pin spacing 3.81 mm; 6-pole; 100% protected against mismatching; Locking lever; 0.9 x 0.9 mm solder pin; orange



1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: 734-159
Coding key; to be snapped above top level; black

Item No.: 734-130
Coding key; to be snapped above top level; white

Installation Notes

Coding



Coding a male header – fitting coding key(s).