



SERIAL SERVERS



PORTSERVER® TS 8/16

Reliable, cost-effective serial-to-network connectivity

PortServer TS 8/16 serial servers deliver intelligent, reliable and cost-effective RS-232/422/485 serial-to-Ethernet connectivity. They support data center console port management applications, as well as property management, point-of-sale, data acquisition, industrial automation, power utilities, travel reservations and other applications requiring serial-to-IP connectivity.

PortServer TS 8/16 incorporates Digi's patented RealPort® COM port redirection software, which provides local serial port functionality. Incoming and outgoing Rlogin and Telnet sessions are also supported on each port.

Digi Port Authority - Remote (DPA-Remote) gives users a management tool for monitoring network and serial activity from a Windows or UNIX-based client or server.

In addition, PortServer TS 8/16 serial servers provide SSHv2 encryption to protect against unauthorized monitoring of LAN traffic and port buffering to capture vital information from the serial ports of managed UNIX servers for problem resolution.

BENEFITS

- 8 or 16 RS-232 or software selectable RS-232/422/485 serial ports
- Cost-effective serial-to-network connectivity
- SSHv2 ensures encrypted connections
- RealPort with encryption provides SSL-based protection
- Ports may be shared between multiple hosts running different operating systems with socket connections, not RealPort
- Supports SNMP for easy network management and RADIUS for authentication and accounting

RELATED PRODUCTS



ConnectPort®
TS 8/16



ConnectPort®
LTS 8/16/32



PortServer®
TS




PortServer®
TS MEI



EtherLite®

APPLICATION EXAMPLE

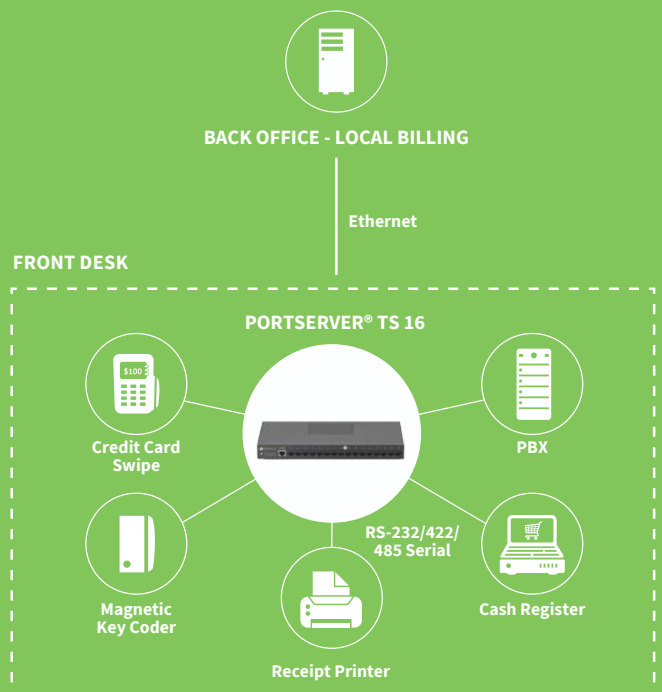

SPECIFICATIONS		PortServer® TS 16 Desktop, TS 8, TS 8 48VDC		PortServer® TS 8/16 MEI		PortServer® TS 16 Rack, TS 16 Enterprise Rack		PortServer® TS 16 Rack 48VDC	
FEATURES									
MANAGEMENT		HTTP/HTTPS, CLI, Digi Port Authority-Remote management diagnostics and auto-discovery tool							
PROTOCOLS		UDP/TCP, DHCP/RARP/ARP-Ping for IP Address assignment, PPP (PAP & CHAP), Extended Telnet RFC 2217, Telnet, Reverse Telnet, R-login, Auto-connect							
SECURITY		SNMP (read/write), SSHv2, RADIUS, Line Printer Daemon (LPD)							
SOFTWARE		Supports Digi's Realport® COM port redirector							
STATUS LEDS		Link, Power							
OPERATING SYSTEMS		AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent							
DIMENSIONS (L X W X H)		8-port: 8.30 in x 3.70 in x 1.00 in (21.08 cm x 9.40 cm x 2.54 cm) 16-port: 13.40 in x 6.60 in x 1.40 in (34.04 cm x 16.76 cm x 3.60 cm)		16.80 in x 6.60 in x 1.60 in (42.70 cm x 16.76 cm x 4.06 cm)					
WEIGHT		8-port: 3.05 lb (1.39 kg) 16-port: 5.30 lb (2.40 kg)		7.05 lb (3.20 kg)					
OTHER		Mounting brackets included on some models, Rack-mountable unit with all power/serial connectors on front panel (PortServer TS 16 Enterprise only), Full modem and hardware flow control, Port buffering up to 64 Kbps per port, Easy firmware upgrades via TFTP, Save/Restore configuration to host, Up to 9 Telnet or Rlogin sessions per port							
INTERFACES									
SERIAL									
PORTS		8 or 16 RS-232		8 or 16 RS-232/422/485 RJ-45 (switch selectable)		16 RS-232		8 or 16 RS-232 RJ-45	
THROUGHPUT		Up to 230 Kbps							
SIGNAL SUPPORT		TXD, RXD, RTS, CTS, DTR, DSR and DCD							
ETHERNET									
PORTS		10/100Base-T 10/100 Mbps; Full or Half duplex							
POWER REQUIREMENTS									
POWER INPUT		8-port: External, 100-240 VAC, 50/60 Hz 8-port, 48 VDC: External 48 VDC to 12 VDC power converter 16-port: Internal, 100-250 VAC, 50/60 Hz		Internal, 100-250 VAC, 50/60 Hz				Internal dual feed power supply, 36-72 VDC	
POWER CONSUMPTION		8-port: 6 W typical 16-port: 12 W typical				12 W typical			
ENVIRONMENTAL									
OPERATING TEMPERATURE		0° C to 50° C (32° F to 122° F)							
RELATIVE HUMIDITY		5% to 95% (non-condensing)							
SERIAL PORT PROTECTION (ESD)		15 kV human body model							
APPROVALS									
SAFETY		UL60950; CAN/CSA C22.2 No. 60950; EN60950							
EMISSIONS/IMMUNITY		8-port models and 16-port MEI model: FCC Part 15, Subpart B, Class A; EN55022, Class A; EN55024; EN61000-3-2,3; All other 16-port models: FCC Part 15, Subpart B, Class B; EN55022, Class B; EN55024; EN61000-3-2,3							

PART NUMBERS	DESCRIPTION
70001734	PortServer TS 8 (RS-232 only)
70001741	PortServer TS 8 (RS-232 only) (International)
70001885	PortServer TS 8, 48 VDC (RS-232 only)
70001733	PortServer TS 16 (RS-232 only)
70001738	PortServer TS 16 (RS-232 only) (International)
70001742	PortServer TS 16 Rack (RS-232 only)
70001743	PortServer TS 16 Rack (RS-232 only) (International)
70001747	PortServer TS 16, 48 VDC, Dual Feed, Rack (RS-232 only)
70001979	PortServer TS 8 MEI DOM
70001981	PortServer TS 8 MEI (International)
70001978	PortServer TS 16 MEI DOM
70001980	PortServer TS 16 MEI (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91000912
F1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

