

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 8-position, PUR halogen-free, black-gray RAL 7021, shielded, free cable end, on Socket straight M8, coding: A, cable length: 3 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Save space – with high-pos. connectors
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1404148 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF01 |
| Product key | AF1BNA |
| GTIN | 4046356680660 |
| Weight per piece (including packing) | 149.6 g |
| Weight per piece (excluding packing) | 144.6 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Application | Standard |
| Number of positions | 8 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | A |

Insulation characteristics

| | |
|---------------------|---|
| Degree of pollution | 3 |
|---------------------|---|

Material specifications

| | |
|--|---|
| Flammability rating according to UL 94 | HB |
| Seal material | NBR |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 30 V AC |
| | 30 V DC |
| Nominal current I_N | 1.5 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | no |
| Status display present | no |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

Connector

Connection 1

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>


Connection 2

| | |
|---------------------|--------------------|
| Type | Socket straight M8 |
| Number of positions | 8 |
| Coding type | A |

Cable/line

| | |
|--------------|-----|
| Cable length | 3 m |
|--------------|-----|

PUR halogen-free black [PUR]

| | |
|---|--|
| Dimensional drawing |  |
| Cable weight | 45 kg/km |
| UL AWM Style | 20549 |
| Number of positions | 8 |
| Shielded | yes |
| Cable type | PUR halogen-free black [PUR] |
| Conductor structure signal line | 18x 0.10 mm |
| AWG signal line | 26 |
| Conductor cross section | 8x 0.14 mm ² (Signal line) |
| Wire diameter incl. insulation | 1 mm ±0.02 mm (Signal line) |
| External cable diameter | 5.90 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | black-gray RAL 7021 |
| Conductor material | Bare Cu litz wires |
| Material, filler | PE |
| Material wire insulation | PP |
| Single wire, color | white, brown, green, yellow, gray, pink, blue, red |
| Thickness, insulation | ≥ 0.21 mm (Signal line) ≥ 0.38 mm (Outer cable sheath) |
| Overall twist | 8 wires around filler to the core |
| Length of twist, overall twist | 58 mm |
| Optical shield covering | 85 % |
| Max. conductor resistance | 139 Ω/km (at 20 °C) |
| Insulation resistance | 1 GΩ*km (at 20 °C) |
| Nominal voltage, cable | ≤ 300 V AC |
| Test voltage | ≥ 3000 V AC (Spark test) |
| Test voltage Core/Shield | ≥ 2000.00 V AC (for 60 s) |
| Smallest bending radius, fixed installation | 29.5 mm |

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>

| | |
|---|---|
| Smallest bending radius, movable installation | 59 mm |
| Dynamic load capacity (bending) | Max. bending cycles: 2000000, Bending radius: 59 mm, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s ² |
| Dynamic load capacity (torsion) | Torsion: ± 180 °/m, Torsion cycles: ≥ 1000000 , Torsional frequency: 35 cycles/min. |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | in accordance with DIN EN 50267-2-1 |
| Flame resistance | according to UL 758/1581 (horizontal) |
| | in accordance with UL 758/1581 FT2 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Other resistance | hydrolysis and microbe resistant |
| | Resistant to salt water |
| | Low adhesion |
| | abrasion-resistant |
| Ambient temperature (operation) | partly UV-resistant (in accordance with DIN EN ISO 4892-2-A) |
| | -40 °C ... 80 °C (cable, fixed installation) |
| | -25 °C ... 80 °C (Cable, flexible installation) |

Environmental and real-life conditions

Ambient conditions

| | |
|---|----------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 85 °C (Plug / socket) |

Standards and regulations

M8

| | |
|--------------------------|-----------------|
| Standard designation | M8 connector |
| Standards/specifications | IEC 61076-2-104 |

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable




1404148

<https://www.phoenixcontact.com/us/products/1404148>

Drawings

Dimensional drawing

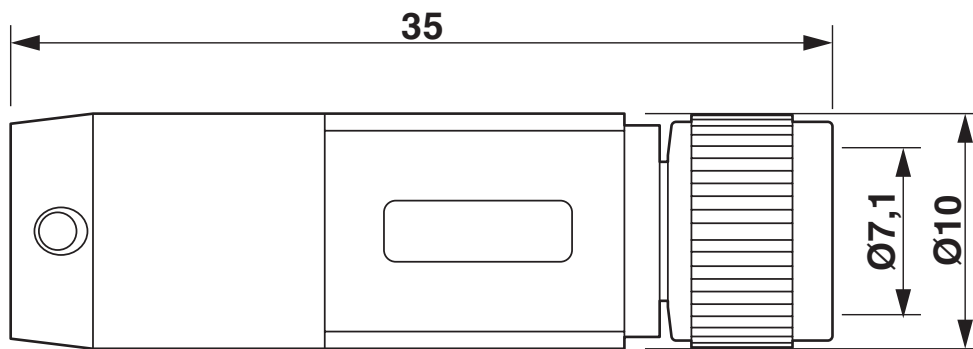

Socket M8 x 1, straight

Schematic diagram



Connector pin assignment of M8 socket, 8-pos., view of socket side

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>

Circuit diagram



Contact assignment of M8 socket

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable





1404148

<https://www.phoenixcontact.com/us/products/1404148>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1404148>

|  UL Listed Approval ID: FILE E 221474 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 30 V | 1.5 A | - | - |

|  cUL Listed Approval ID: FILE E 221474 | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| keine | | | | |
| | 30 V | 1.5 A | - | - |

|  EAC-RoHS Approval ID: RU D-DE.HB35.B.00387 | |
|--|--|
|--|--|

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27060311 |
| ECLASS-15.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

SAC-8P- 3,0-PUR/M 8FS SH - Sensor/actuator cable



1404148

<https://www.phoenixcontact.com/us/products/1404148>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.0 Climate Change

| | |
|---------|---------------|
| CO2e kg | 2.664 kg CO2e |
|---------|---------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com