



# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

MAX4855

## General Description

The MAX4855 dual, single-pole/double-throw (SPDT) switch operates from a single +2V to +5.5V supply and features rail-to-rail signal handling. The MAX4855 has low on-resistance (0.75Ω) with a +3V supply making it ideal for audio switching applications in portable devices. The device also integrates two internal comparators that can be used for headphone detection or mute/send key functions.

The MAX4855 is available in the space-saving (3mm x 3mm), 16-pin thin QFN package and operates over the extended temperature range of -40°C to +85°C.

## Applications

Speaker Headset Switching  
Audio-Signal Routing  
Cellular Phones  
Notebook Computers  
PDAs and Other Handheld Devices

## Features


- ◆ **Audio Signal Routing**
- ◆ **0.75Ω On-Resistance**
- ◆ **0.18Ω On-Resistance Flatness**
- ◆ **0.07Ω Channel-to-Channel Matching**
- ◆ **Rail-to-Rail Signal Handling**
- ◆ **2 Integrated Comparators**
- ◆ **1.8V Logic Compatible**
- ◆ **2V to 5.5V Supply Range**
- ◆ **Available in a Space-Saving (3mm x 3mm), 16-Pin TQFN Package**

## Ordering Information


PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX4855ETE	-40°C to +85°C	16 TQFN-EP*	ABY

\*EP = Exposed paddle.

## Block Diagram/Truth Table

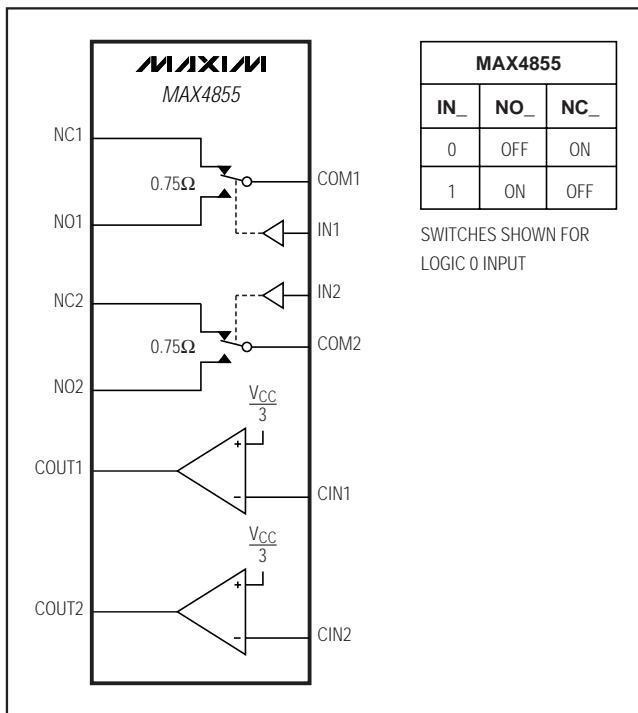

## Pin Configuration

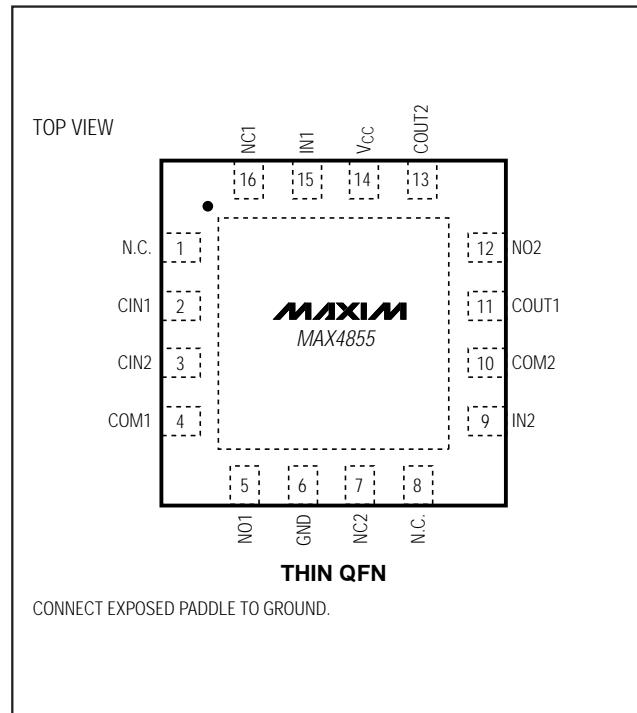

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at [www.maxim-ic.com](http://www.maxim-ic.com).

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

## ABSOLUTE MAXIMUM RATINGS

V <sub>CC</sub> , IN, CIN to GND	-0.3V to +6.0V
NO, NC, COM, COUT (Note 1)	-0.3V to (V <sub>CC</sub> + 0.3V)
COUT_ Continuous Current	±20mA
Closed Switch Continuous Current COM, NO, NC	±300mA
Peak Current COM, NO, NC (pulsed at 1ms, 50% duty cycle)	±400mA
Peak Current COM, NO, NC (pulsed at 1ms, 10% duty cycle)	±500mA

Continuous Power Dissipation (T <sub>A</sub> = +70°C)	
16-Pin Thin QFN (derate 20.8mW/°C above +70°C)	.....1667mW
Operating Temperature Range	-40°C to +85°C
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C

**Note 1:** Signals on NO, NC, or COM exceeding V<sub>CC</sub> or GND are clamped by internal diodes. Signals on IN exceeding GND are clamped by an internal diode. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = +2.7V to +5.5V, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at V<sub>CC</sub> = +3.0V, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V <sub>CC</sub>		2	5.5		V
Supply Current	I <sub>CC</sub>	V <sub>CC</sub> = 5.5V, V <sub>IN</sub> = 0V or V <sub>CC</sub>	5	10		µA
<b>ANALOG SWITCH</b>						
Analog Signal Range	V <sub>NO</sub> , V <sub>NC</sub> , V <sub>COM</sub>		0	V <sub>CC</sub>		V
On-Resistance (Note 3)	R <sub>ON</sub>	V <sub>CC</sub> = 2.7V, I <sub>COM</sub> = 100mA, V <sub>NC</sub> or V <sub>NO</sub> = 0V to V <sub>CC</sub>	TA = +25°C	0.75	1	Ω
			TA = -40°C to +85°C		1.1	
On-Resistance Match Between Channels (Notes 3, 4)	ΔR <sub>ON</sub>	V <sub>CC</sub> = 2.7V, I <sub>COM</sub> = 100mA, V <sub>NC</sub> or V <sub>NO</sub> = 1.5V	TA = +25°C	0.075	0.120	Ω
			TA = -40°C to +85°C		0.135	
On-Resistance Flatness (Note 5)	R <sub>FLAT</sub>	V <sub>CC</sub> = 2.7V, I <sub>COM</sub> = 100mA, V <sub>NC</sub> or V <sub>NO</sub> = 0.75V, 1.5V, 1.75V	TA = +25°C	0.18	0.275	Ω
			TA = -40°C to +85°C		0.3	
NO/NC Off-Leakage Current (Note 2)	I <sub>OFF</sub>	V <sub>CC</sub> = 5.5V, V <sub>NC</sub> or V <sub>NO</sub> = 1V or 4.5V, V <sub>COM</sub> = 4.5V or 1V	TA = +25°C	-2	+2	nA
			TA = -40°C to +85°C	-10	+10	
COM On-Leakage Current (Note 2)	I <sub>ON</sub>	V <sub>CC</sub> = 5.5V; V <sub>NC</sub> or V <sub>NO</sub> = 1V, 4.5V, or floating; V <sub>COM</sub> = 1V, 4.5V, or floating	TA = +25°C	-2	+2	nA
			TA = -40°C to +85°C	-15	+15	
<b>DYNAMIC CHARACTERISTICS</b>						
Turn-On Time	t <sub>ON</sub>	V <sub>CC</sub> = 2.7V, V <sub>NO</sub> or V <sub>NC</sub> = 1.5V, R <sub>L</sub> = 300Ω, C <sub>L</sub> = 50pF (Figure 1)	TA = +25°C	40	60	ns
			TA = -40°C to +85°C		100	

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = +2.7V$  to  $+5.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $V_{CC} = +3.0V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Turn-Off Time	t <sub>OFF</sub>	$V_{CC} = 2.7V$ , $V_{NO\_}$ or $V_{NC\_} = 1.5V$ , $R_L = 300\Omega$ , $C_L = 50pF$ (Figure 1)	$T_A = +25^\circ C$	30	40	ns
			$T_A = -40^\circ C$ to $+85^\circ C$		60	
Break-Before-Make Time Delay (Note 3)	t <sub>D</sub>	$V_{CC} = 2.7V$ , $V_{NO\_}$ or $V_{NC\_} = 1.5V$ , $R_L = 50\Omega$ , $C_L = 50pF$ (Figure 2)	$T_A = +25^\circ C$	15		ns
			$T_A = -40^\circ C$ to $+85^\circ C$	2		
Charge Injection	Q	$V_{COM\_} = 1.5V$ , $R_S = 0\Omega$ , $C_L = 1.0nF$ (Figure 3)		170		pC
Off-Isolation (Note 6)		$f = 100kHz$ , $V_{COM\_} = 1VRMS$ , $R_L = 50\Omega$ , $C_L = 5pF$ (Figure 4)		-75		dB
Crosstalk	V <sub>CT</sub>	$f = 100kHz$ , $V_{COM\_} = 1VRMS$ , $R_L = 50\Omega$ , $C_L = 5pF$ (Figure 4)		-93		dB
-3dB Bandwidth	BW	Signal = 0dBm, $R_L = 50\Omega$ , $C_L = 5pF$ (Figure 4)	38			MHz
Total Harmonic Distortion	THD	$f = 20Hz$ to $20kHz$ , $V_{COM\_} = 1V + 2Vp-p$ , $R_L = 32\Omega$	0.07			%
NO <sub>+</sub> /NC <sub>-</sub> Off-Capacitance	C <sub>OFF</sub>	$f = 1MHz$ (Figure 5)	50			pF
COM On-Capacitance	C <sub>ON</sub>	$f = 1MHz$ (Figure 5)	150			pF
<b>DIGITAL I/O (IN<sub>_</sub>)</b>						
Input-Logic High Voltage	V <sub>IH</sub>	$V_{CC} = 2V$ to $3.6V$	1.4			V
		$V_{CC} = 3.6V$ to $5.5V$	1.8			
Input-Logic Low Voltage	V <sub>IL</sub>	$V_{CC} = 2V$ to $3.6V$		0.5		V
		$V_{CC} = 3.6V$ to $5.5V$		0.8		
Input Leakage Current	I <sub>IN</sub>	$V_{IN\_} = 0$ or $5.5V$	-0.5		+0.5	μA
<b>COMPARATOR</b>						
Comparator Range			0	5.5		V
Comparator Threshold		$V_{CC} = 2V$ to $5.5V$ , falling input	0.3 x $V_{CC}$	0.33 x $V_{CC}$	0.36 x $V_{CC}$	V
Comparator Hysteresis		$V_{CC} = 2V$ to $5.5V$		50		mV
Comparator Output High Voltage		I <sub>SOURCE</sub> = 1mA	$V_{CC} - 0.4V$			V
Comparator Output Low Voltage		I <sub>SINK</sub> = 1mA		0.4		V
Comparator Switching Time		Rising input (Figure 6)		2.5		μs
		Falling input (Figure 6)		0.5		

**Note 2:** Specifications are 100% tested at  $T_A = +85^\circ C$  only, and guaranteed by design and characterization over the specified temperature range.

**Note 3:** Guaranteed by design and characterization; not production tested.

**Note 4:**  $\Delta R_{ON} = R_{ON(MAX)} - R_{ON(MIN)}$ .

**Note 5:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.










**Note 6:** Off-Isolation =  $20\log_{10}(V_{COM\_}/V_{NO\_})$ ,  $V_{COM\_}$  = output,  $V_{NO\_}$  = input to off switch.

MAX4855

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

## Typical Operating Characteristics

( $V_{CC} = 3.0V$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.)

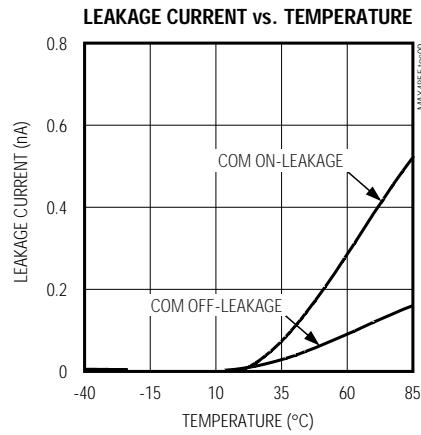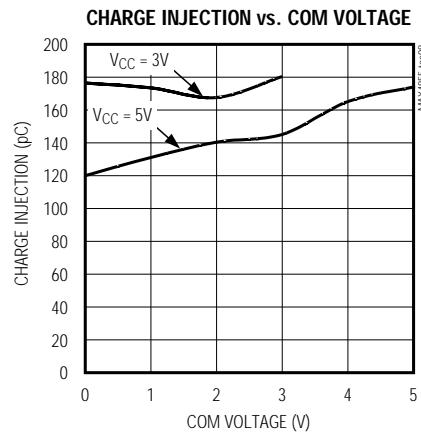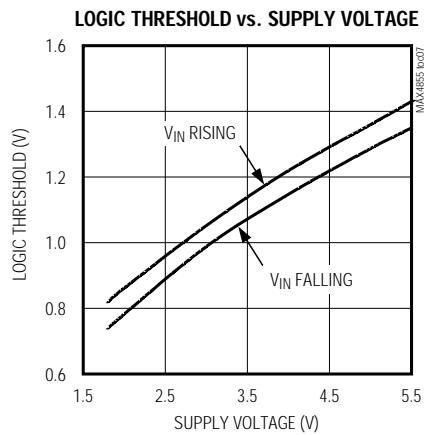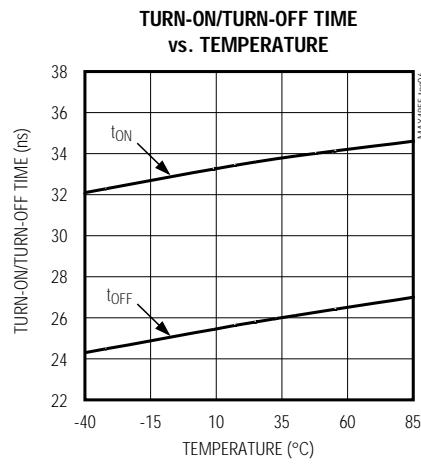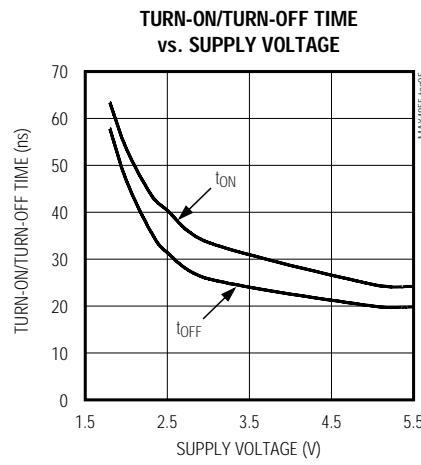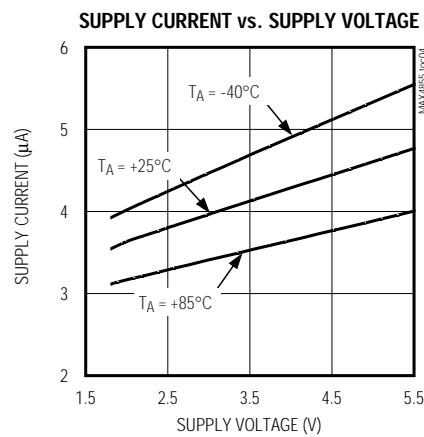
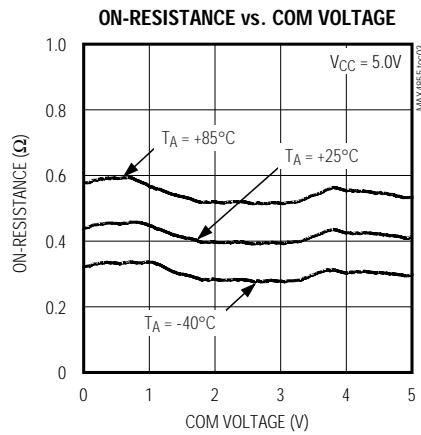
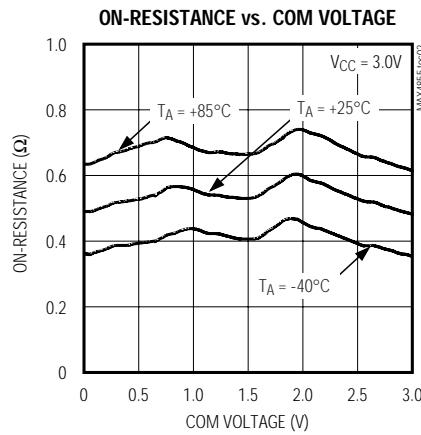
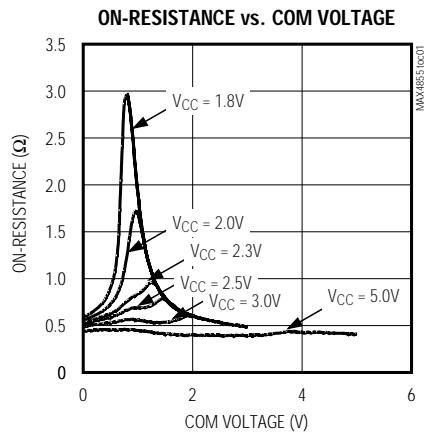


# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

MAX4855

## Typical Operating Characteristics (continued)

(V<sub>CC</sub> = 3.0V, T<sub>A</sub> = +25°C, unless otherwise noted.)

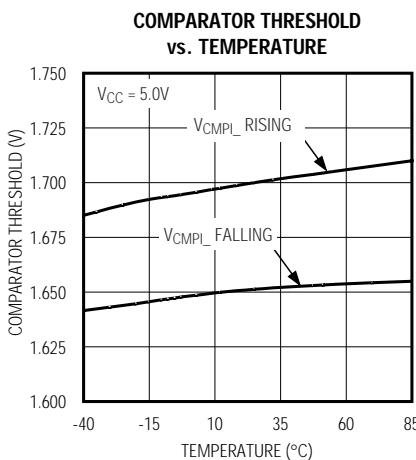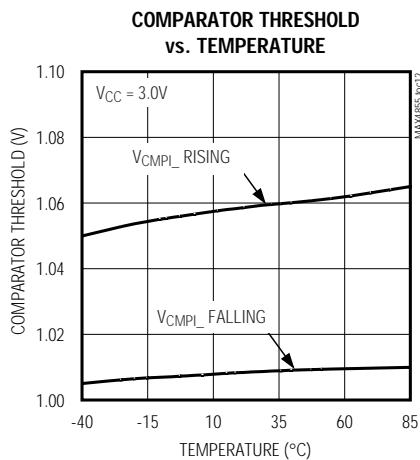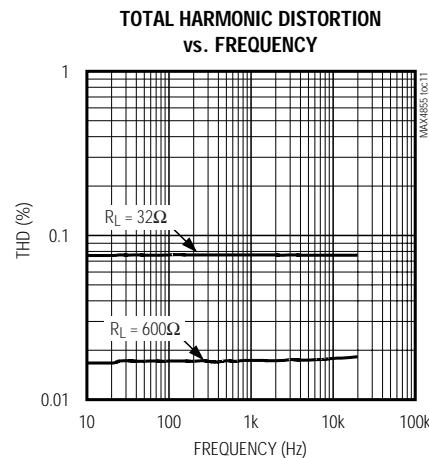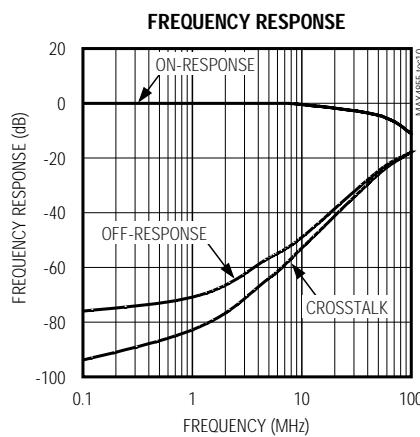

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

## Pin Description

PIN	NAME	FUNCTION
1, 8	N.C.	No Connection. Not internally connected.
2	CIN1	Inverting Input for Comparator 1
3	CIN2	Inverting Input for Comparator 2
4	COM1	Common Terminal for Analog Switch 1
5	NO1	Normally Open Terminal for Analog Switch 1
6	GND	Ground
7	NC2	Normally Closed Terminal for Analog Switch 2
9	IN2	Digital Control Input for Analog Switch 2. A logic LOW on IN2 connects COM2 to NC2 and a logic HIGH connects COM2 to NO2.
10	COM2	Common Terminal for Analog Switch 2
11	COUT1	Output for Comparator 1
12	NO2	Normally Open Terminal for Analog Switch 2
13	COUT2	Output for Comparator 2
14	VCC	Supply Voltage. Bypass to GND with a 0.01µF capacitor as close to the pin as possible.
15	IN1	Digital Control Input for Analog Switch 1. A logic LOW on IN1 connects COM1 to NC1 and a logic HIGH connects COM1 to NO1.
16	NC1	Normally Closed Terminal for Analog Switch 1
EP	—	Exposed Paddle. Connect to PC board ground plane.

## Detailed Description

The MAX4855 dual SPDT, low on-resistance, low-voltage, analog switch operates from a +2V to +5.5V supply and can handle signals up to the power rails. In addition, the MAX4855 integrates two internal comparators that can be used for headphone or mute detection. The comparator threshold is internally generated to be approximately 1/3 of Vcc.

## Applications Information

### Digital Control Inputs

The logic inputs (IN<sub>\_</sub>) accept up to +5.5V even if the supply voltages are below this level. For example, with a +3.3V Vcc supply, IN<sub>\_</sub> can be driven low to GND and high to +5.5V allowing for mixing of logic levels in a system. Driving IN<sub>\_</sub> rail-to-rail minimizes power consumption. For a +2V supply voltage, the logic thresholds are 0.5V (low) and 1.4V (high); for a +5V supply voltage, the logic thresholds are 0.8V (low) and 1.8V (high).

### Analog Signal Levels

The on-resistance of these switches changes very little for analog input signals across the entire supply voltage range (see the *Typical Operating Characteristics*). The switches are bidirectional, so the NO<sub>\_</sub>, NC<sub>\_</sub>, and COM<sub>\_</sub> pins can be either inputs or outputs.

### Comparator

The positive terminal of the comparator is internally set to Vcc/3. When the negative terminal (CIN<sub>\_</sub>) is below the threshold (Vcc/3), the comparator output (COUT<sub>\_</sub>) is high. When CIN<sub>\_</sub> rises above Vcc/3, COUT<sub>\_</sub> is low.

The comparator threshold allows for detection of headphones since headphone audio signals are typically biased to Vcc/2.

### Power-Supply Sequencing

**Caution: Do not exceed the absolute maximum ratings because stresses beyond the listed ratings may cause permanent damage to the device.**

Proper power-supply sequencing is recommended for all CMOS devices. Always apply Vcc before applying analog signals, especially if the analog signal is not current-limited.

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

## Test Circuits/Timing Diagrams

MAX4855

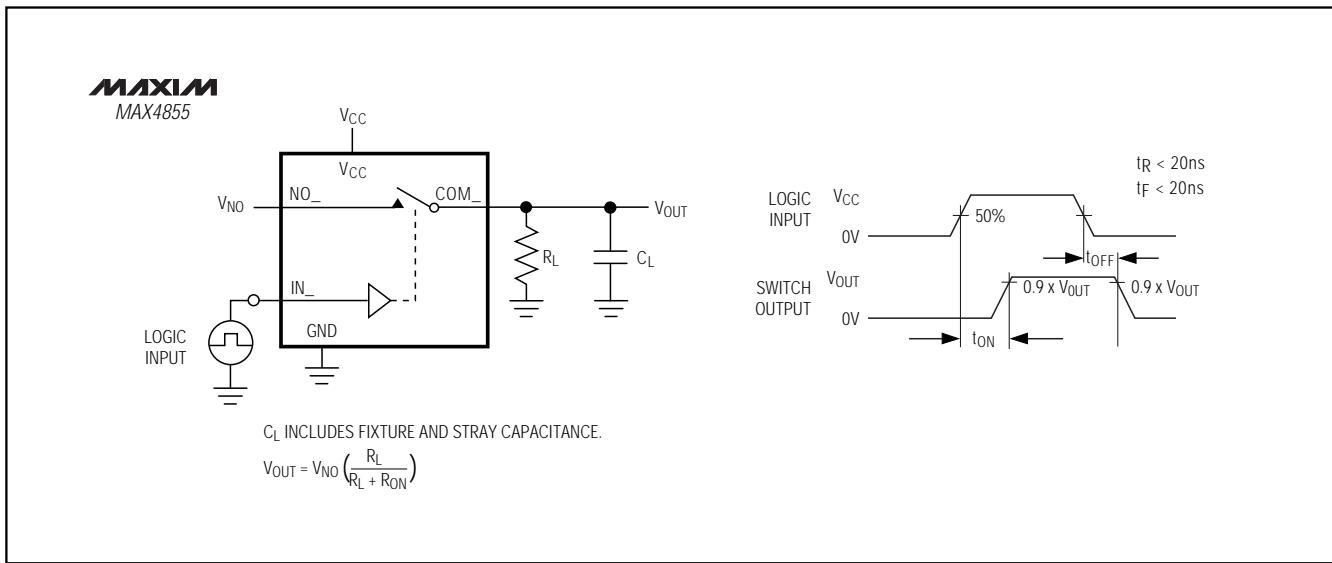


Figure 1. Switching Time

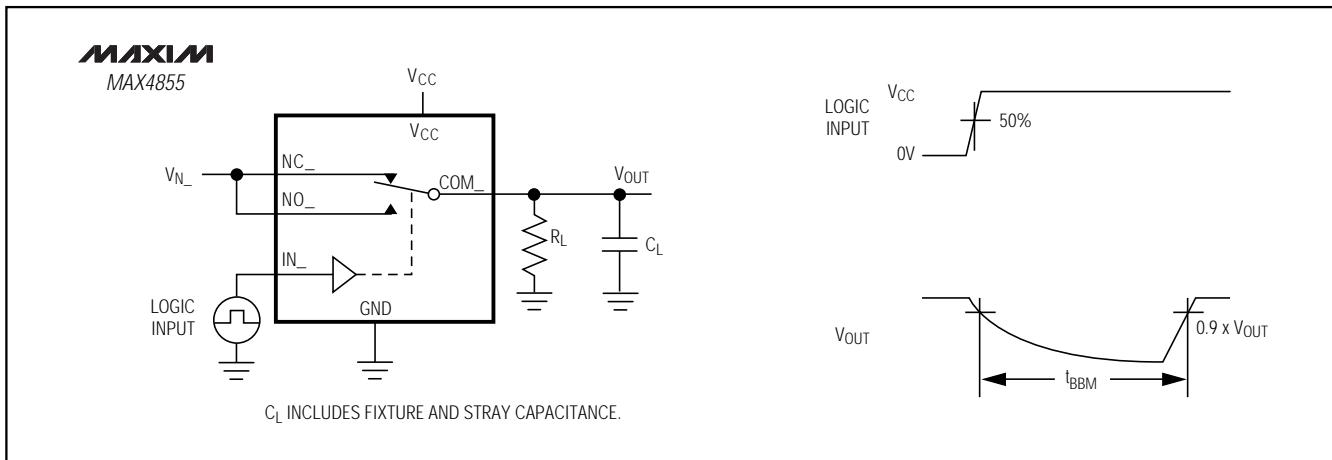


Figure 2. Break-Before-Make Interval

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

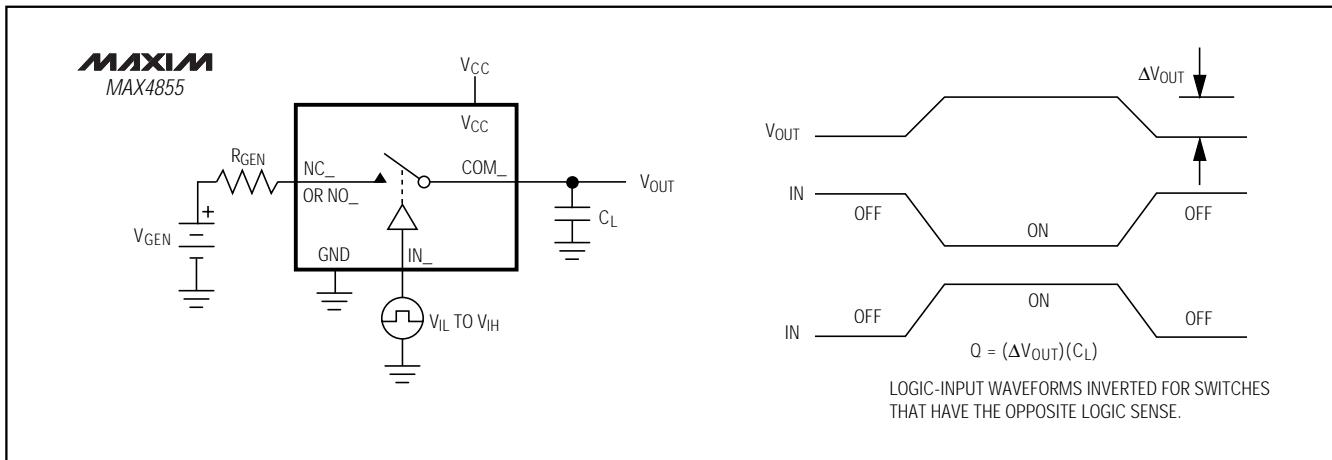


Figure 3. Charge Injection

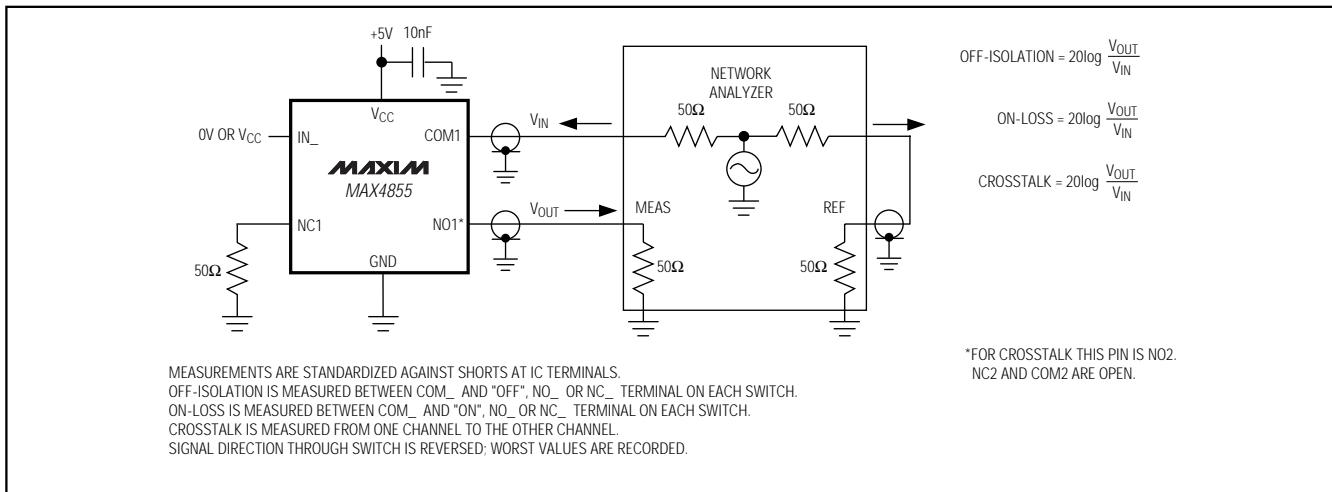


Figure 4. On-Loss, Off-Isolation, and Crosstalk

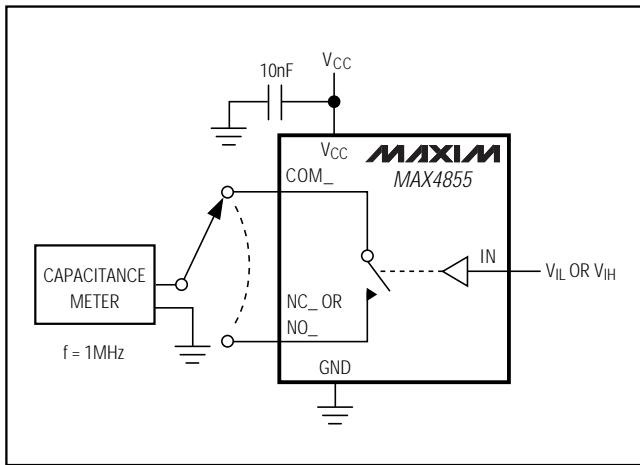


Figure 5. Channel Off-/On-Capacitance

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators


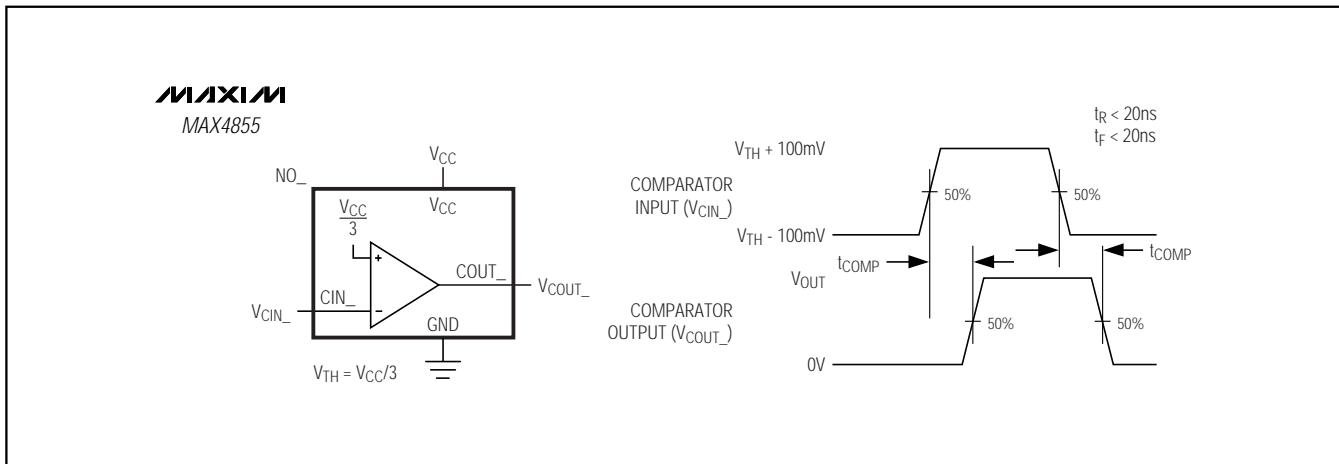


Figure 6. Comparator Switching Time

## Typical Operating Circuit

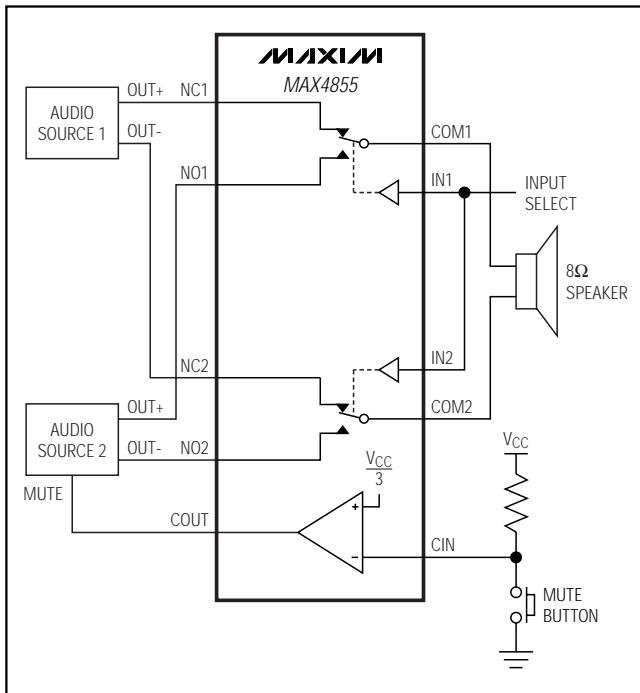

## Chip Information


TRANSISTOR COUNT: 735

PROCESS: CMOS

# 0.75Ω, Dual SPDT Audio Switch with Integrated Comparators

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

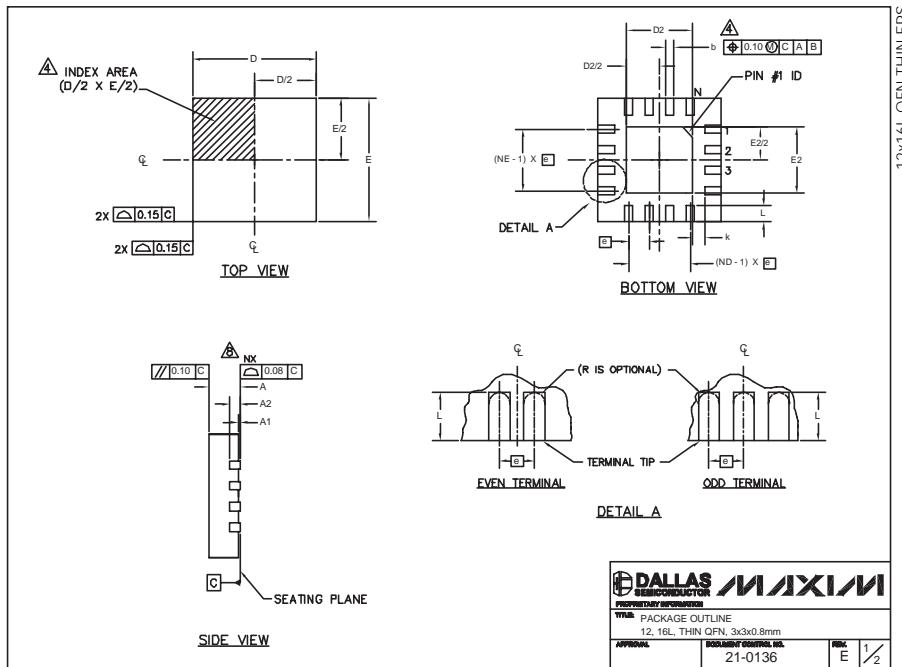

PKG	12L 3x3			18L 3x3			
	REF.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.70	0.75	0.80	
b	0.20	0.26	0.30	0.20	0.26	0.30	
D	2.80	3.00	3.10	2.80	3.00	3.10	
E	2.80	3.00	3.10	2.80	3.00	3.10	
e	0.60 BSC.			0.60 BSC.			
L	0.45	0.55	0.65	0.30	0.40	0.50	
N	12			16			
ND	3			4			
NE	3			4			
A1	0	0.02	0.05	0	0.02	0.05	
A2		0.20 REF			0.20 REF		
k	0.25	-	-	0.25	-	-	

EXPOSED PAD VARIATIONS									
PKG CODES	D2		E2		PIN ID	JEDEC			
	MIN.	NOM.	MAX.	MIN.			NOM.	MAX.	
T1233-1	0.85	1.10	1.25	0.95	1.10	1.25	0.35x45°	WEED-1	NO
T1233-3	0.85	1.10	1.25	0.85	1.10	1.25	0.35x45°	WEED-1	YES
T1833-1	0.85	1.10	1.25	0.85	1.10	1.25	0.35x45°	WEED-2	NO
T1833-2	0.85	1.10	1.25	0.85	1.10	1.25	0.35x45°	WEED-2	YES
T1833F-3	0.85	0.90	0.95	0.85	0.90	0.95	0.225x45°	WEED-2	N/A
T1833-4	0.85	1.10	1.25	0.85	1.10	1.25	0.35x45°	WEED-2	NO

NOTES:

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JEDEC 55-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
5. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.20 mm AND 0.25 mm FROM TERMINAL TIP.
6. ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
7. DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
8. COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
9. DRAWING CONFORMS TO JEDEC MO220 REVISION C.

DALLAS SEMICONDUCTOR PROPRIETARY INFORMATION  
TITLE: PACKAGE OUTLINE  
12, 16L, THIN QFN, 3x3x0.8mm  
APPROVAL: DOCUMENT CONTROL NO.: 21-0136 REV: E 1/2

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

10 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600