

Description: 2012 Diplexer

PART NUMBER: DPX2012LKHHR1931L

Features:

Applications:

Compact Size

LTE

- Low loss
- · High Soldering Heat Resistance

ELECTRICAL SPECIFICATIONS

Low-Band

V. 24.14							
Item	Frequency Range(MHz)	Min.	Тур.	Max.			
	1710~1980	-	0.80	1.00			
Inportion Logo (dD)	2110~2170	-	1.00	1.30			
Insertion Loss (dB)	2170~2180	-	1.10	1.40			
	2180~2200	-	1.35	1.85			
Return Loss (dB)	1710~2200	10	13.0	-			
Attanuation (dB)	2496~2500	10	14.5	-			
Attenuation (dB)	2500~2690	11	15.0	-			

High-Band

Item	Frequency Range(MHz)	Min.	Тур.	Max.
	2496~2500	-	1.05	1.35
	2500~2690	-	1.00	1.30
Insertion Loss (dB)	3300~3550	-	0.40	0.80
	3550~3700	-	0.30	0.80
	3700~3800	-	0.30	0.80
Return Loss (dB)	2496~3800	10	18.0	-
	1710~1980	11	13.5	-
Attonuction (dP)	2110~2170	11	16.5	•
Attenuation (dB)	2170~2180	10	15.5	-
	2180~2200	8	13.5	-

Common

Item	Frequency Range(MHz)	Min.	Тур.	Max.
Detum Less (dD)	1710~2200	10	13.0	-
Return Loss (dB)	2496~3800	10	18.0	-

Operating Temperature Range: -40~85°C

Power Capacity: 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998




Description: 2012 Diplexer

PART NUMBER: DPX2012LKHHR1931L

MECHANICAL DIMENSION

Outline




Dimension

L	W	T	а	
2.00±0.15	1.25±0.15	0.90±0.10	0.30±0.15	
b	С	р		
0.20±0.15	0.20±0.15	0.65±0.15		


NOTE: Dimensions in mm.


Termination



Terminal name	Function
1	GND
2	Common
3	GND
4	Low band
5	GND
6	High band

Recommended Land Pattern





Unit: mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 2012 Diplexer


PART NUMBER: DPX2012LKHHR1931L

MEASURING DIAGRAM



Test Instrument:
Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

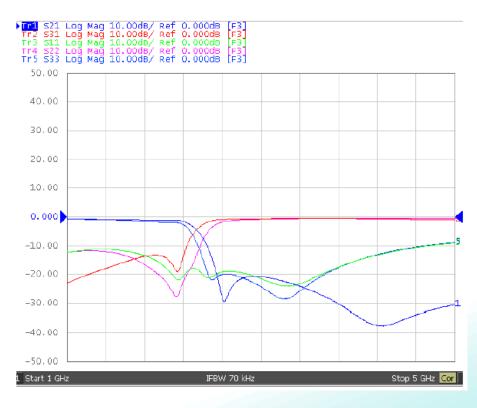

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 2012 Diplexer

PART NUMBER: DPX2012LKHHR1931L


PACKING SPECIFICATION

Peel-off force



The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)



TYPE	A	В	С	D	E	F	
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5	
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-	

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

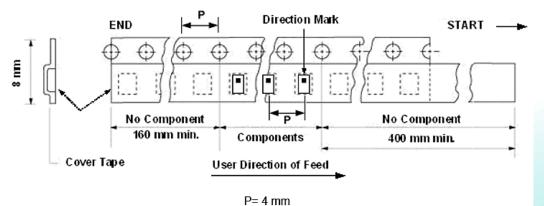

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 2012 Diplexer

PART NUMBER: DPX2012LKHHR1931L

REVISION HISTORY	

RevisionDateDescriptionVersion 1Feb. 23, 2022- New issue

