

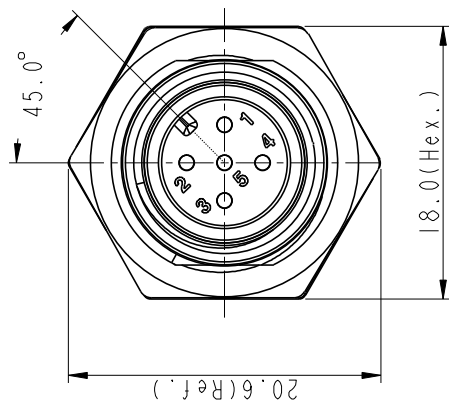
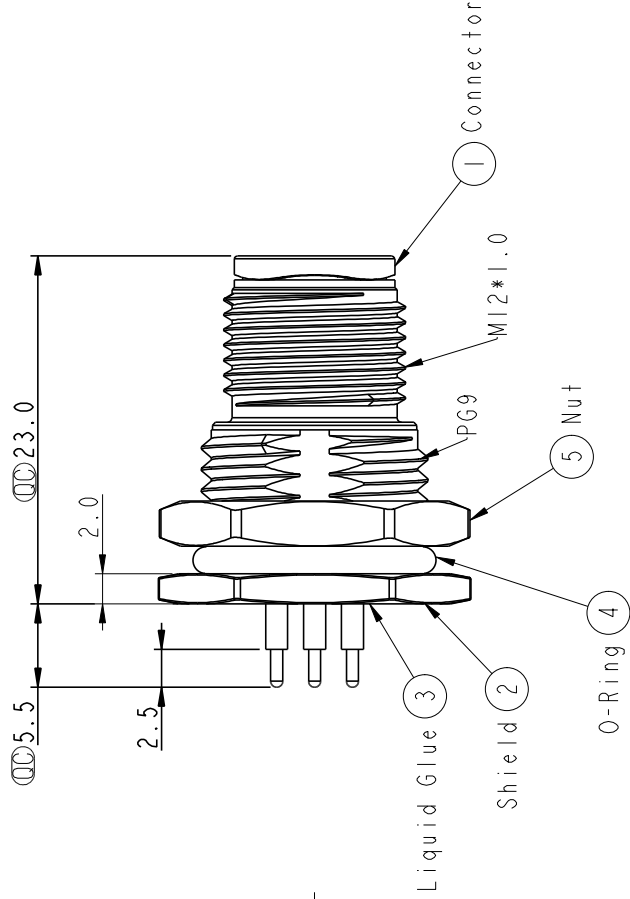
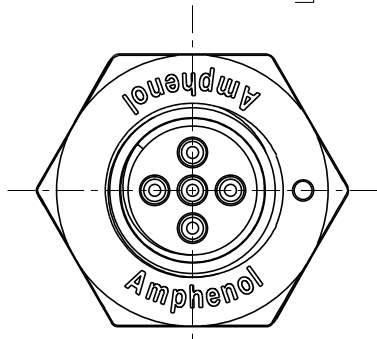



Note:
* Important Dimension.
* Waterproof Rate: IP68, Unmated.
* IP68: 1M Depth Of Water In 24hours.
* Housing: Thermoplastic, Black.
* Pin: Copper Alloy, Gold Plated.
* Shield: Metal, Nickel Plated.
* O-Ring: Rubber, Gray.
* Panel Nut: Metal, Nickel Plated.
* For Panel Thickness Max 4.5mm.
* Nut are packed separately in PE bag

UNIT : mm				TITLE		NMEA2000, MICRO-C, PANEL, PCB TYPE 5PIN, M CONN M PIN, METAL		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
TOLERANCE		X		SCALE		2 : 1		SIZE		A4		SHEET		1 OF 1	
.XX		±0.1		REV.		C		WC-REV.		A.3		QC: Inspection item		HMC-05PMMP-SF8001	
.XXX		±0.05		REV.		C		WC-REV.		A.3		QC: Inspection item		HMC-05PMMP-SF8001	
ANGLES		±1°		REV.		C		WC-REV.		A.3		QC: Inspection item		HMC-05PMMP-SF8001	
				2		3		4		5		6		7	
								安費諾亮泰企業股份有限公司		CUSTOMER		ALTW		APPROVED BY	
										HMC-05PMMP-SF8001		CHECKED BY		Rita	
										HMC-05PMMP-SF8001		Vicky		2019-04-01	
										HMC-05PMMP-SF8001		2019-04-01		2019-04-01	
										ALTW		Max		2019-04-01	
										6		7		8	
										8		9		10	

F		E		D		C		B		A	
REV.		ECN NO.		DATE		SIGN		DESCRIPTION		DATE	
A		Initial Release		2017/03/23		Frank Deng		Change Rev.01 To Rev.A		2019-04-01	
B		LENI770179		2017/07/03		Frank Deng		Change Note		2019-04-01	
C		C190517		2019/04/09		Vicky		Change Note		2019-04-01	