


NOTES:

1. MOUNTING: Mounts in a $\varnothing .281 \pm .002$ (7.14mm $\pm$ 0.051) panel hole on .375 (9.53mm) centers.
2. ASSEMBLY: Insert Litepipe through the panel hole and press on retaining ring to secure unit to panel. Slide PCB into position aligning LED with the end of the Litepipe unit.
3. MATERIAL: Litepipe - Acrylic (Clear optical grade) UL 94-HB
Lens - Polycarbonate UL 94-V2
Seal - TPE
Retaining Ring - Polypropylene (Black)
4. Meets NEMA 4/IP 56 standards
5. U.S. & Foreign Pat. Issued




REVISIONS					
ECN #	REV.	DESCRIPTION	DATE	INITIALS	CHK'D
	001	REVISED PER ECR 111009AZ01	8/18/10	KH	DPZ
	002	MODIFIED GENERAL TOLERANCE .XX	11/14/11	RL	AZ

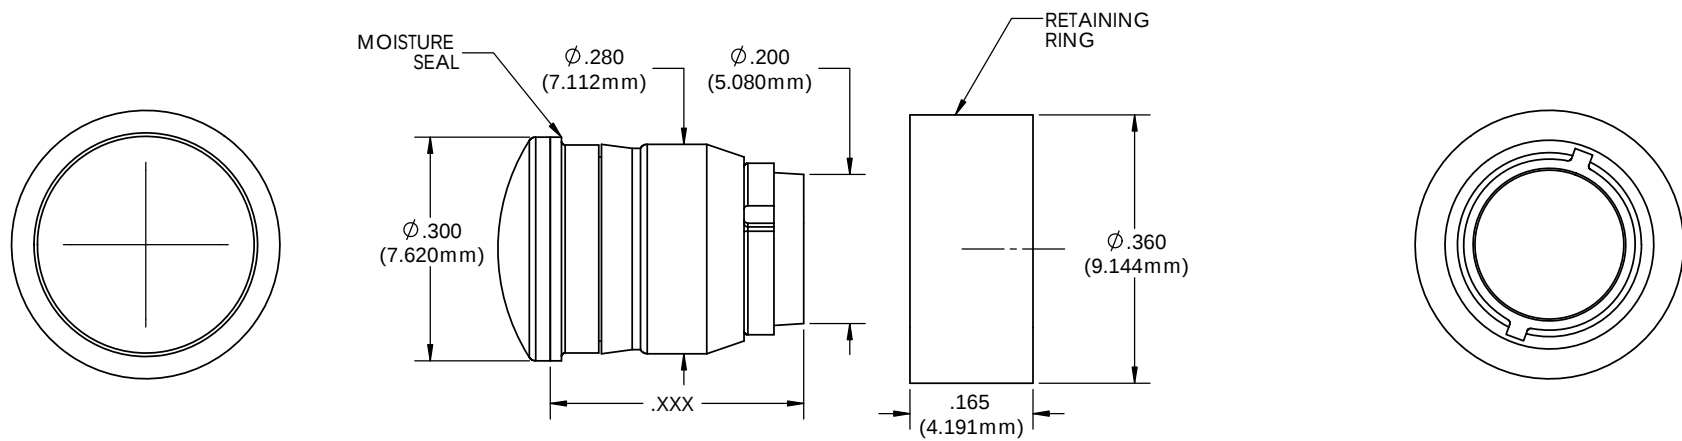

ORDERING CODE: LMS XXX XXX

LITEPIPE		LENS	
XXX =	LENGTH	XXX =	COLOR
033	.330"	RTP	RED TRANSPARENT
053	.530"	ATP	AMBER TRANSPARENT
073	.730"	GTP	GREEN TRANSPARENT
093	0.93"	BTP	BLUE TRANSPARENT
113	1.13"	YTP	YELLOW TRANSPARENT
133	1.33"	CTP	CLEAR TRANSPARENT
CUSTOM LENGTHS AVAILABLE UPON REQUEST		GLO	WHITE TRANSLUCENT

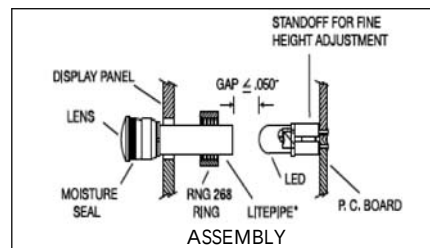

DIMENSION STYLE: INCHES / MM GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
INCHES MM		DRAWN K HOWARD		8/18/10	
X ± .020 ± .508		CHECKED DPZ		8/19/10	
XX ± .015 ± .381					
XXX ± .005 ± .127					
ANGLE ± 1°					
BREAK ALL CORNERS AND RADIUS UNLESS NOTED		MATERIAL		TITLE:	
		SEE NOTES		5MM MOISTURE SEALED LITEPIPE	
THIRD ANGLE PROJECTION		FINISH		SIZE DWG. NO.	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.		SEE NOTES		B LMS XXX XXX	
DO NOT SCALE DRAWING		SCALE: 6:1		REV 002	
				SHEET 1 OF 1	

VCC OPTOELECTRONICS
 190 BOSSTICK BLVD. SUITE 101 SAN MARCOS, CA 92069 U.S.A
 PHONE: (760) 560-1300, FAX: (760) 560-1301 EMAIL: vccsales@vccsite.com