

1405331

https://www.phoenixcontact.com/us/products/1405331

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Socket, straight, M12-SPEEDCON, coding: A, on free cable end, Rear mounting, Pg9, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire, potted, this item is undergoing a smooth changeover, lead-free alternative in accordance with RoHS II without exception 6c (Pb < 0.1%) possible on request in advance

Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut
- · SPEEDCON fast locking system reduces cabling times

Commercial data

Item number	1405331
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCHE
GTIN	4046356746465
Weight per piece (including packing)	34.9 g
Weight per piece (excluding packing)	24.247 g
Customs tariff number	85444290
Country of origin	DE



1405331

https://www.phoenixcontact.com/us/products/1405331

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery
Safety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	 WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	 WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	 The products are suitable for applications in plant, controller, and electrical device engineering.
	 When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	 Assembled products may not be manipulated or improperly opened.
	 Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	 When using the product in direct connection with third-party manufacturers, the user is responsible.
	 For operating voltages > 50 V AC, conductive connector housings must be grounded
	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the corresponding technical data. You will find information:

information:
o On the product
o On the packing label
o In the supplied documentation

o Online at phoenixcontact.com/products under the product

• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory

• Only use tools recommended by Phoenix Contact



1405331

https://www.phoenixcontact.com/us/products/1405331

	section of the product at phoenixcontact.com/products
	 Ensure that the protective or functional ground has been properly connected.
	 VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Mounting	
Mounting type	Rear mounting Pg9 With flat nut
Assembly note	With flat nut
Product properties	
Product type	Circular connectors (device side)
Application	Signal
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3
Material specifications	
Material Molding compound	PUR (potted)
Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires
Electrical properties	
Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	60 V
Nominal current I _N	4 A
Max. conductor resistance	57.6 mΩ/m



1405331

https://www.phoenixcontact.com/us/products/1405331

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross section	0.34 mm ²
Tightening torque	2 Nm 3 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	0.5 m	
Cable type	TPE litz wire	
Wire diameter incl. insulation	1.2 mm ±0.07 mm	
Single wire, color	black, brown,blue, white, gray	
Cable cross section	0.34 mm²	
Conductor material	Tin-plated Cu litz wires	
Conductor structure signal line	7x 0.25 mm	
AWG signal line	22 TPE	
Material wire insulation		
Thickness, insulation	0.21 mm	
Nominal voltage, cable	300 V	
Test voltage, cable	2000 V AC	
Cable resistance	≤ 57.6 mΩ/m	
Cable insulation resistance	≥ 20 MΩ*km	
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)	
	-25 °C 85 °C (Cable, flexible installation)	

Environmental and real-life conditions



1405331

https://www.phoenixcontact.com/us/products/1405331

Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Socket)
	-25 °C 85 °C (cable, fixed installation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)
UL Type Rating	Type 4 (indoor use only)

Standards and regulations


Standard designation		M12 circular connector	
	Standards/specifications	according to IEC 61076-2-101	



1405331

https://www.phoenixcontact.com/us/products/1405331

Drawings

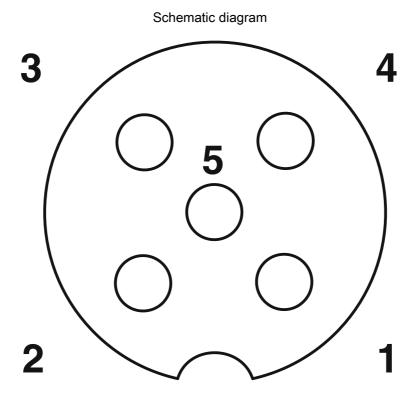

Pin assignment M12 socket, 5-pos., A-coded, socket side view

Circuit diagram



Contact assignment of the M12 socket



1405331

https://www.phoenixcontact.com/us/products/1405331

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1405331

c 911 us	cULus Recogniz Approval ID: E221474	zed 4-20140616			
	Nominal voltage U _N		Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	22 - 20	-



1405331

https://www.phoenixcontact.com/us/products/1405331

Classifications

	\sim	1 / 0	C
_		\perp A \circ	

	ECLASS-13.0	27440103	
ETIM			
	ETIM 9.0	EC003570	
UNSPSC			
	UNSPSC 21.0	39121400	



1405331

https://www.phoenixcontact.com/us/products/1405331

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7011e4f9-8497-418e-96e7-a067d3ba2f4f

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com