

# MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
FREDERICK, MARYLAND

FED. MFR. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

YA-2RB-A2

ADJ6000

CATALOG LISTING  
YA-2RB-A2  
PAGE 1 OF 1


M

DRAWING  
NUMBER

ISSUE  
10

### REVISIONS

|    |            |           |       |
|----|------------|-----------|-------|
| A  | CO 9600    | 17 FEB 06 | CHECK |
| 1  | Y O        |           |       |
| 2  | MAY 60     |           |       |
| B  | CO34310    |           |       |
| K  | P          |           |       |
| 20 | DEC 78     |           |       |
| C  | CO-73287-J |           |       |
|    | J A L      |           |       |
| 22 | NOV 93     |           |       |
| D  | CO-77588   |           |       |
|    | K D R      |           |       |
| 29 | MAR 94     |           |       |
| E  | CO93346    |           |       |
|    | D L T      |           |       |
| 27 | AUG 98     |           |       |
| F  | CO-95750-B |           |       |
|    | C S L      |           |       |
| 3  | APR 00     |           |       |
| H  | 0000713    |           |       |
|    | J A H      |           |       |
| 30 | JUN 03     |           |       |
| J  | 0018388    |           |       |
|    | T G P      |           |       |
| 17 | FEB 06     |           |       |

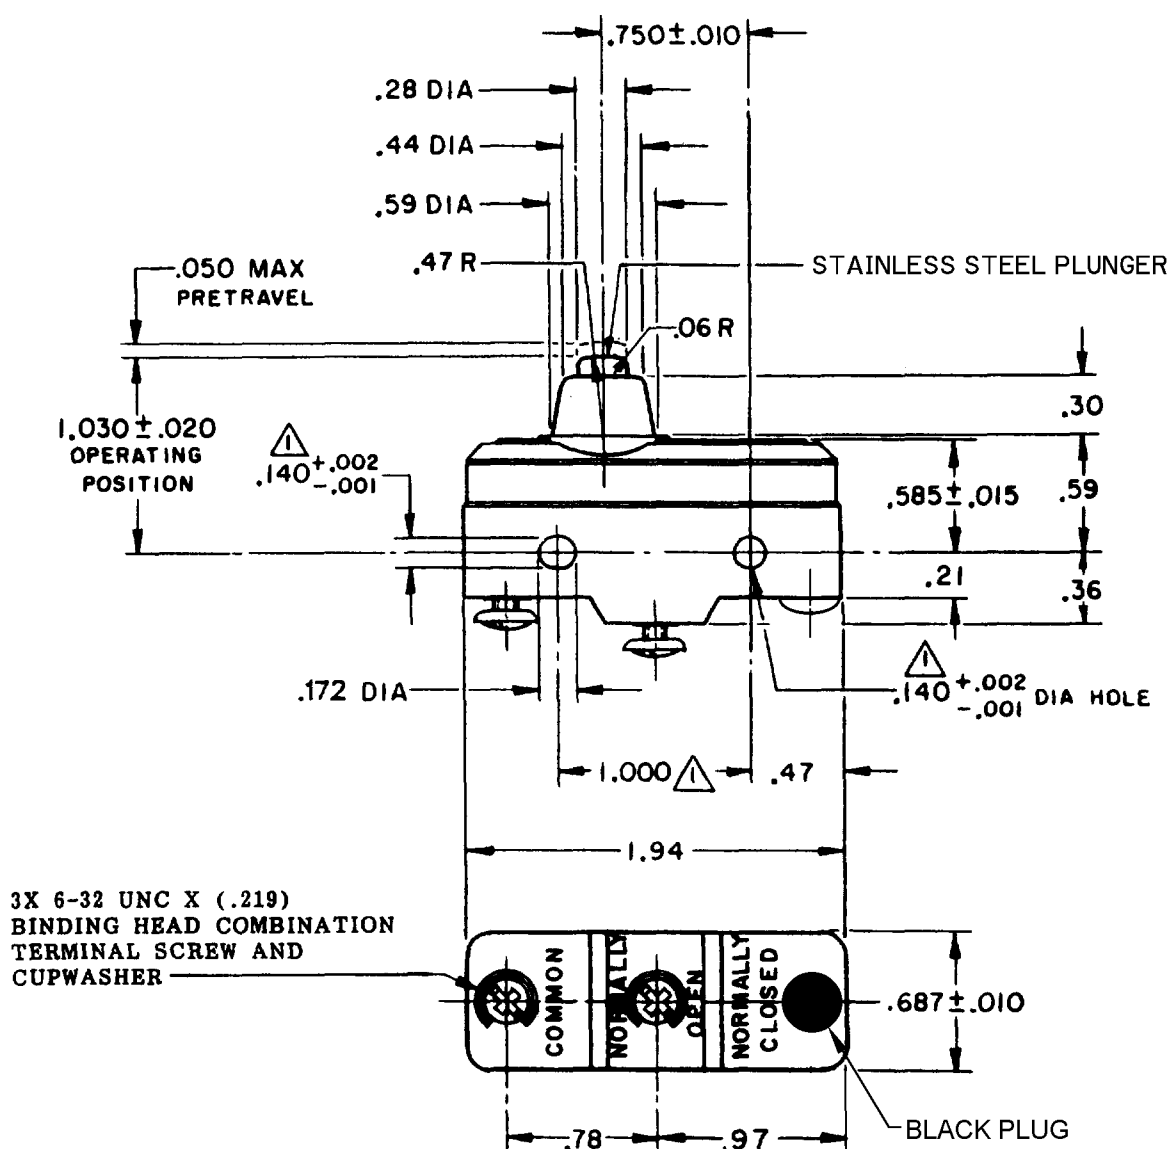

### NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

| CHARACTERISTICS                   | ELECTRICAL DATA                                                                                                      | SCALE FULL                                                                                                                                                                |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OPERATING FORCE ----- 14-22 OZ    | CONTACT ARRANGEMENT<br>S P N O                                                                                       | DO NOT SCALE PRINT                                                                                                                                                        |
| RELEASE FORCE ----- 10 OZ MIN     | L23 20A - 125, 250 OR 480 VAC<br>10A - 125 VAC "L"<br>1HP - 125 VAC, 2HP - 250 VAC<br>1/2A - 125 VDC, 1/4A - 250 VDC | UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES<br><b>TOLERANCES ARE:</b><br>ONE PLACE (.0) ±.030<br>TWO PLACE (.00) ±.015<br>THREE PLACE (.000) ±.005<br>ANGLES ± |
| DIFFERENTIAL TRAVEL -- .002-.0075 | L288<br>L308<br>L315                                                                                                 | WEIGHT .064 LB                                                                                                                                                            |
| OVERTRAVEL ----- .094 MIN         | 20(3)A 250V ~ T85 5E4                                                                                                |                                                                                                                                                                           |

RASTER

DRAWN

1 Y O 2 MAY 60

CHECK

60

9 MAY 60

17 FEB 06

3 APR 00

27 AUG 98

29 MAR 94

22 NOV 93

20 DEC 78

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06

CHECK

17 FEB 06