


## SN74LVC16245A 16-Bit Bus Transceiver With 3-State Outputs

### 1 Features

- Member of the Texas Instruments Widebus™ Family
- Operates From 1.65 V to 3.6 V
- Inputs Accept Voltages to 5.5 V
- Max  $t_{pd}$  of 4 ns at 3.3 V
- Typical  $V_{OLP}$  (Output Ground Bounce) < 0.8 V at  $V_{CC} = 3.3$  V,  $T_A = 25^\circ\text{C}$
- Typical  $V_{OHV}$  (Output  $V_{OH}$  Undershoot) > 2 V at  $V_{CC} = 3.3$  V,  $T_A = 25^\circ\text{C}$
- Supports Mixed-Mode Signal Operation on All Ports (5-V Input/Output Voltage With 3.3-V  $V_{CC}$ )
- $I_{off}$  Supports Live Insertion, Partial-Power-Down Mode, and Back-Drive Protection
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

### 4 Simplified Schematic

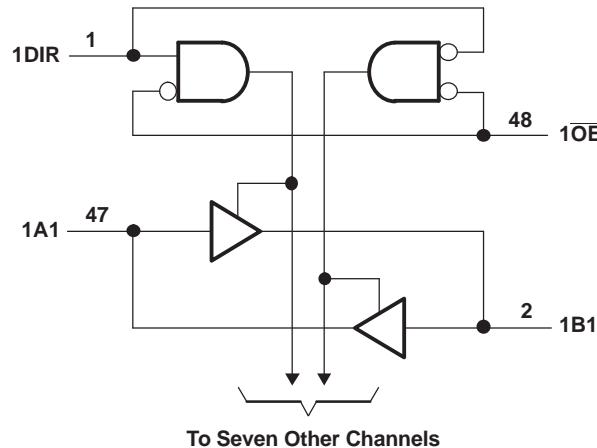

Pin numbers shown are for the DGG, DGV, and DL packages.

### 2 Applications

- Electronic Points of Sale
- Printers and Other Peripherals
- Motor Drives
- Wireless and Telecom Infrastructures
- Wearable Health and Fitness Devices

### 3 Description

This 16-bit (dual-octal) noninverting bus transceiver is designed for 1.65-V to 3.6-V  $V_{CC}$  operation.


The SN74LVC16245A device is designed for asynchronous communication between data buses.

This device can be used as two 8-bit transceivers or one 16-bit transceiver.

### Device Information<sup>(1)</sup>

| PART NUMBER   | PACKAGE    | BODY SIZE (NOM)    |
|---------------|------------|--------------------|
| SN74LVC16245A | TSSOP (48) | 12.50 mm x 6.10 mm |
|               | TVSOP (48) | 9.70 mm x 4.40 mm  |
|               | SSOP (48)  | 15.88 mm x 7.49 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

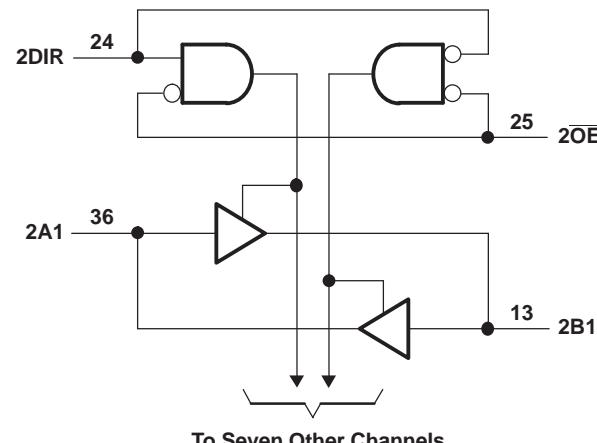

### To Seven Other Channels

 An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. **PRODUCTION DATA**.

## Table of Contents

|          |   |           |           |   |           |
|----------|---|-----------|-----------|---|-----------|
| <b>1</b> | <b>Features</b>                             | <b>1</b>  | <b>9</b>  | <b>Detailed Description</b>                             | <b>11</b> |
| <b>2</b> | <b>Applications</b>                         | <b>1</b>  | 9.1       | Overview  | 11        |
| <b>3</b> | <b>Description</b>                          | <b>1</b>  | 9.2       | Functional Block Diagram                                | 11        |
| <b>4</b> | <b>Simplified Schematic</b>                 | <b>1</b>  | 9.3       | Feature Description                                     | 11        |
| <b>5</b> | <b>Revision History</b>                     | <b>2</b>  | 9.4       | Device Functional Modes                                 | 11        |
| <b>6</b> | <b>Pin Configuration and Functions</b>      | <b>3</b>  | <b>10</b> | <b>Application and Implementation</b>                   | <b>12</b> |
| <b>7</b> | <b>Specifications</b>                       | <b>6</b>  | 10.1      | Application Information                                 | 12        |
| 7.1      | Absolute Maximum Ratings                    | 6         | 10.2      | Typical Application                                     | 12        |
| 7.2      | Handling Ratings                            | 6         | <b>11</b> | <b>Power Supply Recommendations</b>                     | <b>13</b> |
| 7.3      | Recommended Operating Conditions            | 7         | <b>12</b> | <b>Layout</b>   | <b>14</b> |
| 7.4      | Thermal Information                         | 7         | 12.1      | Layout Guidelines                                       | 14        |
| 7.5      | Electrical Characteristics—DC Limit Changes | 8         | 12.2      | Layout Example  | 14        |
| 7.6      | Switching Characteristics, –40°C TO 85°C    | 9         | <b>13</b> | <b>Device and Documentation Support</b>                 | <b>14</b> |
| 7.7      | Switching Characteristics, –40°C TO 125°C   | 9         | 13.1      | Trademarks  | 14        |
| 7.8      | Operating Characteristics                   | 9         | 13.2      | Electrostatic Discharge Caution                         | 14        |
| 7.9      | Typical Characteristics                     | 9         | 13.3      | Glossary  | 14        |
| <b>8</b> | <b>Parameter Measurement Information</b>    | <b>10</b> | <b>14</b> | <b>Mechanical, Packaging, and Orderable Information</b> | <b>14</b> |

## 5 Revision History


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision P (January 2014) to Revision Q                          | Page |
|---|------|
| • Updated $I_{off}$ Feature.  | 1    |
| • Added Applications  | 1    |
| • Added Device Information table.   | 1    |
| • Added Handling Ratings table.   | 6    |
| • Added Thermal Information table.  | 7    |
| • Added –40°C TO 125°C temperature range to Electrical Characteristics table. | 8    |
| • Added Switching Characteristics table for –40°C TO 125°C temperature range. | 9    |
| • Added Typical Characteristics.  | 9    |

| Changes from Revision O (January 2008) to Revision P             | Page |
|--|------|
| • Updated document to new TI data sheet format.                  | 1    |
| • Deleted Ordering Information table.                            | 1    |
| • Changed MAX operating free-air temperature from 85°C to 125°C. | 7    |

## 6 Pin Configuration and Functions

**DGG, DGV, OR DL PACKAGE  
(TOP VIEW)**

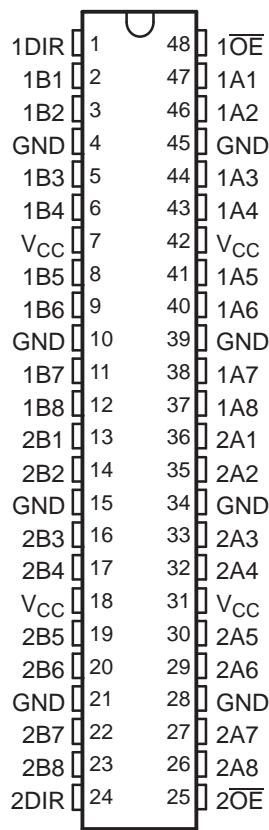


**Pin Functions**

| PIN |      | I/O | DESCRIPTION         |
|-----|------|-----|---------------------|
| NO. | NAME |     |                     |
| 1   | 1DIR | —   | Direction pin 1     |
| 2   | 1B1  | I/O | 1B1 input or output |
| 3   | 1B2  | I/O | 1B2 input or output |
| 4   | GND  | —   | Ground pin          |
| 5   | 1B3  | I/O | 1B3 input or output |
| 6   | 1B4  | I/O | 1B4 input or output |
| 7   | VCC  | —   | Power pin           |
| 8   | 1B5  | I/O | 1B5 input or output |
| 9   | 1B6  | I/O | 1B6 input or output |
| 10  | GND  | —   | Ground pin          |
| 11  | 1B7  | I/O | 1B7 input or output |
| 12  | 1B8  | I/O | 1B8 input or output |
| 13  | 2B1  | I/O | 2B1 input or output |
| 14  | 2B2  | I/O | 2B2 input or output |
| 15  | GND  | —   | Ground pin          |
| 16  | 2B3  | I/O | 2B3 input or output |
| 17  | 2B4  | I/O | 2B4 input or output |
| 18  | VCC  | —   | Power pin           |

**Pin Functions (continued)**


| PIN |      | I/O | DESCRIPTION         |
|-----|------|-----|---------------------|
| NO. | NAME |     |                     |
| 19  | 2B5  | I/O | 2B5 input or output |
| 20  | 2B6  | I/O | 2B6 input or output |
| 21  | GND  | —   | Ground pin          |
| 22  | 2B7  | I/O | 2B7 input or output |
| 23  | 2B8  | I/O | 2B8 input or output |
| 24  | 2DIR | —   | Direction pin 2     |
| 25  | 2OE  | I   | Output Enable 2     |
| 26  | 2A8  | I/O | 2A8 input or output |
| 27  | 2A7  | I/O | 2A7 input or output |
| 28  | GND  | —   | Ground pin          |
| 29  | 2A6  | I/O | 2A6 input or output |
| 30  | 2A5  | I/O | 2A5 input or output |
| 31  | VCC  | —   | Power pin           |
| 32  | 2A4  | I/O | 2A4 input or output |
| 33  | 2A3  | I/O | 2A3 input or output |
| 34  | GND  | —   | Ground pin          |
| 35  | 2A2  | I/O | 2A2 input or output |
| 36  | 2A1  | I/O | 2A1 input or output |
| 37  | 1A8  | I/O | 1A8 input or output |
| 38  | 1A7  | I/O | 1A7 input or output |
| 39  | GND  | —   | Ground pin          |
| 40  | 1A6  | I/O | 1A6 input or output |
| 41  | 1A5  | I/O | 1A5 input or output |
| 42  | VCC  | —   | Power pin           |
| 43  | 1A4  | I/O | 1A4 input or output |
| 44  | 1A3  | I/O | 1A3 input or output |
| 45  | GND  | —   | Ground pin          |
| 46  | 1A2  | I/O | 1A2 input or output |
| 47  | 1A1  | I/O | 1A1 input or output |
| 48  | 1OE  | I   | Output Enable 1     |



**Table 1. Pin Assignments<sup>(1)</sup>  
(56-Ball GQL or ZQL Package)**

|          | 1    | 2   | 3        | 4        | 5   | 6                |
|----------|------|-----|----------|----------|-----|------------------|
| <b>A</b> | 1DIR | NC  | NC       | NC       | NC  | $1\overline{OE}$ |
| <b>B</b> | 1B2  | 1B1 | GND      | GND      | 1A1 | 1A2              |
| <b>C</b> | 1B4  | 1B3 | $V_{CC}$ | $V_{CC}$ | 1A3 | 1A4              |
| <b>D</b> | 1B6  | 1B5 | GND      | GND      | 1A5 | 1A6              |
| <b>E</b> | 1B8  | 1B7 |          |          | 1A7 | 1A8              |
| <b>F</b> | 2B1  | 2B2 |          |          | 2A2 | 2A1              |
| <b>G</b> | 2B3  | 2B4 | GND      | GND      | 2A4 | 2A3              |
| <b>H</b> | 2B5  | 2B6 | $V_{CC}$ | $V_{CC}$ | 2A6 | 2A5              |
| <b>J</b> | 2B7  | 2B8 | GND      | GND      | 2A8 | 2A7              |
| <b>K</b> | 2DIR | NC  | NC       | NC       | NC  | $2\overline{OE}$ |

(1) NC – No internal connection



**Table 2. Pin Assignments<sup>(1)</sup>  
(54-Ball GRD or ZRD Package)**

|          | 1   | 2   | 3        | 4                | 5   | 6   |
|----------|-----|-----|----------|------------------|-----|-----|
| <b>A</b> | 1B1 | NC  | 1DIR     | $1\overline{OE}$ | NC  | 1A1 |
| <b>B</b> | 1B3 | 1B2 | NC       | NC               | 1A2 | 1A3 |
| <b>C</b> | 1B5 | 1B4 | $V_{CC}$ | $V_{CC}$         | 1A4 | 1A5 |
| <b>D</b> | 1B7 | 1B6 | GND      | GND              | 1A6 | 1A7 |
| <b>E</b> | 2B1 | 1B8 | GND      | GND              | 1A8 | 2A1 |
| <b>F</b> | 2B3 | 2B2 | GND      | GND              | 2A2 | 2A3 |
| <b>G</b> | 2B5 | 2B4 | $V_{CC}$ | $V_{CC}$         | 2A4 | 2A5 |
| <b>H</b> | 2B7 | 2B6 | NC       | NC               | 2A6 | 2A7 |
| <b>J</b> | 2B8 | NC  | 2DIR     | $2\overline{OE}$ | NC  | 2A8 |

(1) NC – No internal connection

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|          |   | MIN       | MAX            | UNIT |
|----------|---|-----------|----------------|------|
| $V_{CC}$ | Supply voltage range  | –0.5      | 6.5            | V    |
| $V_I$    | Input voltage range <sup>(2)</sup>  | –0.5      | 6.5            | V    |
| $V_O$    | Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup> | –0.5      | 6.5            | V    |
| $V_O$    | Voltage range applied to any output in the high or low state <sup>(2)(3)</sup>              | –0.5      | $V_{CC} + 0.5$ | V    |
| $I_{IK}$ | Input clamp current   | $V_I < 0$ | –50            | mA   |
| $I_{OK}$ | Output clamp current  | $V_O < 0$ | –50            | mA   |
| $I_O$    | Continuous output current   |           | ±50            | mA   |
|          | Continuous current through each $V_{CC}$ or GND   |           | ±100           | mA   |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The value of  $V_{CC}$  is provided in the *Recommended Operating Conditions* table.

### 7.2 Handling Ratings

|             |                           | MIN  | MAX | UNIT |
|-------------|---------------------------|--|-----|------|
| $T_{stg}$   | Storage temperature range | –65  | 150 | °C   |
| $V_{(ESD)}$ | Electrostatic discharge   | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | 0   | 2000 |
|             |                           | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | 0   | 1000 |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                 |                                    |                                    | MIN                    | MAX             | UNIT |
|-----------------|------------------------------------|------------------------------------|------------------------|-----------------|------|
| V <sub>CC</sub> | Supply voltage                     | Operating                          | 1.65                   | 3.6             | V    |
|                 |                                    | Data retention only                | 1.5                    |                 |      |
| V <sub>IH</sub> | High-level input voltage           | V <sub>CC</sub> = 1.65 V to 1.95 V | 0.65 × V <sub>CC</sub> |                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V   | 1.7                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V to 3.6 V   | 2                      |                 |      |
| V <sub>IL</sub> | Low-level input voltage            | V <sub>CC</sub> = 1.65 V to 1.95 V | 0.35 × V <sub>CC</sub> |                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V   | 0.7                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V to 3.6 V   | 0.8                    |                 |      |
| V <sub>I</sub>  | Input voltage                      |                                    | 0                      | 5.5             | V    |
| V <sub>O</sub>  | Output voltage                     | High or low state                  | 0                      | V <sub>CC</sub> | V    |
|                 |                                    | 3-state                            | 0                      | 5.5             |      |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 1.65 V           |                        | -4              | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V            |                        | -8              |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V            |                        | -12             |      |
|                 |                                    | V <sub>CC</sub> = 3 V              |                        | -24             |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 1.65 V           |                        | 4               | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V            |                        | 8               |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V            |                        | 12              |      |
|                 |                                    | V <sub>CC</sub> = 3 V              |                        | 24              |      |
| Δt/Δv           | Input transition rise or fall rate |                                    |                        | 5               | ns/V |
| T <sub>A</sub>  | Operating free-air temperature     |                                    | -40                    | 125             | °C   |

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number [SCBA004](#).

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> | DGG     | DGV     | DL      | UNIT |
|-------------------------------|---------|---------|---------|------|
|                               | 48 PINS | 48 PINS | 48 PINS |      |
| R <sub>θJA</sub>              | 67.1    | 80.2    | 70.6    | °C/W |
| R <sub>θJC(top)</sub>         | 19.9    | 32.7    | 36.8    |      |
| R <sub>θJB</sub>              | 34.2    | 43.5    | 43.1    |      |
| Ψ <sub>JT</sub>               | 1.8     | 4.7     | 13.9    |      |
| Ψ <sub>JB</sub>               | 33.9    | 42.9    | 42.6    |      |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics—DC Limit Changes

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER                      | TEST CONDITIONS  | V <sub>CC</sub>                          | -40°C TO 85°C         |                    |                       | -40°C TO 125°C |                    |     | UNIT |
|--------------------------------|--|--|-----------------------|--------------------|-----------------------|----------------|--------------------|-----|------|
|                                |  |  | MIN                   | TYP <sup>(1)</sup> | MAX                   | MIN            | TYP <sup>(1)</sup> | MAX |      |
| V <sub>OH</sub>                | I <sub>OH</sub> = -100 µA  | 1.65 V to 3.6 V                          | V <sub>CC</sub> – 0.2 |                    | V <sub>CC</sub> – 0.2 |                |                    |     | V    |
|                                | I <sub>OH</sub> = -4 mA  | 1.65 V                                   | 1.2                   |                    | 1.2                   |                |                    |     |      |
|                                | I <sub>OH</sub> = -8 mA  | 2.3 V                                    | 1.7                   |                    | 1.7                   |                |                    |     |      |
|                                | I <sub>OH</sub> = -12 mA   | 2.7 V                                    | 2.2                   |                    | 2.2                   |                |                    |     |      |
|                                |  | 3 V                                      | 2.4                   |                    | 2.4                   |                |                    |     |      |
| V <sub>OL</sub>                | I <sub>OL</sub> = 100 µA   | 1.65 V to 3.6 V                          |                       | 0.2                |                       |                | 0.2                |     | V    |
|                                | I <sub>OL</sub> = 4 mA   | 1.65 V                                   |                       | 0.45               |                       |                | 0.45               |     |      |
|                                | I <sub>OL</sub> = 8 mA   | 2.3 V                                    |                       | 0.7                |                       |                | 0.7                |     |      |
|                                | I <sub>OL</sub> = 12 mA  | 2.7 V                                    |                       | 0.4                |                       |                | 0.4                |     |      |
|                                | I <sub>OL</sub> = 24 mA  | 3 V                                      |                       | 0.55               |                       |                | 0.55               |     |      |
| I <sub>I</sub>                 | Control inputs   | V <sub>I</sub> = 0 to 5.5 V              | 3.6 V                 |                    | ±5                    |                | ±5                 |     | µA   |
| I <sub>off</sub>               |  | V <sub>I</sub> or V <sub>O</sub> = 5.5 V | 0                     |                    | ±10                   |                | ±20                |     | µA   |
| I <sub>OZ</sub> <sup>(2)</sup> |  | V <sub>O</sub> = 0 to 5.5 V              | 2.3 V to 3.6 V        |                    | ±5                    |                | ±5                 |     | µA   |
| I <sub>CC</sub>                | V <sub>I</sub> = V <sub>CC</sub> or GND<br>3.6 V ≤ V <sub>I</sub> ≤ 5.5 V <sup>(3)</sup> | I <sub>O</sub> = 0                       | 3.6 V                 |                    | 20                    |                | 20                 |     | µA   |
|                                |  |  |                       |                    | 20                    |                | 20                 |     |      |
| ΔI <sub>CC</sub>               | One input at V <sub>CC</sub> – 0.6,<br>Other inputs at V <sub>CC</sub> or GND            |  | 2.7 V to 3.6 V        |                    | 500                   |                | 500                |     | µA   |
| C <sub>i</sub>                 | Control inputs   | V <sub>I</sub> = V <sub>CC</sub> or GND  | 3.3 V                 |                    | 5                     |                |                    |     | pF   |
| C <sub>io</sub>                | A or B port  | V <sub>O</sub> = V <sub>CC</sub> or GND  | 3.3 V                 |                    | 7.5                   |                |                    |     | pF   |

(1) All typical values are at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C.

(2) For I/O ports, the parameter I<sub>OZ</sub> includes the input leakage current.

(3) This applies in the disabled state only.

## 7.6 Switching Characteristics, –40°C TO 85°C

over recommended operating free-air temperature range (unless otherwise noted) (see [Figure 3](#))

| PARAMETER          | FROM<br>(INPUT) | TO<br>(OUTPUT) | –40°C TO 85°C                       |      |                                    |     |                         |     |                                    |     | UNIT |  |
|--------------------|-----------------|----------------|-------------------------------------|------|------------------------------------|-----|-------------------------|-----|------------------------------------|-----|------|--|
|                    |                 |                | V <sub>CC</sub> = 1.8 V<br>± 0.15 V |      | V <sub>CC</sub> = 2.5 V<br>± 0.2 V |     | V <sub>CC</sub> = 2.7 V |     | V <sub>CC</sub> = 3.3 V<br>± 0.3 V |     |      |  |
|                    |                 |                | MIN                                 | MAX  | MIN                                | MAX | MIN                     | MAX | MIN                                | MAX |      |  |
| t <sub>pd</sub>    | A or B          | B or A         | 1.5                                 | 7.1  | 1                                  | 4.5 | 1                       | 4.7 | 1                                  | 4.0 | ns   |  |
| t <sub>en</sub>    | OE              | A or B         | 1.5                                 | 8.9  | 1                                  | 5.6 | 1.5                     | 6.7 | 1.5                                | 5.5 | ns   |  |
| t <sub>dis</sub>   | OE              | A or B         | 1.5                                 | 11.9 | 1                                  | 6.8 | 1.5                     | 7.1 | 1.5                                | 6.6 | ns   |  |
| t <sub>sk(o)</sub> |                 |                |                                     |      |                                    |     |                         |     |                                    | 1   | ns   |  |

## 7.7 Switching Characteristics, –40°C TO 125°C

over recommended operating free-air temperature range (unless otherwise noted) (see [Figure 3](#))

| PARAMETER          | FROM<br>(INPUT) | TO<br>(OUTPUT) | –40°C TO 125°C                      |      |                                    |     |                         |     |                                    |     | UNIT |  |
|--------------------|-----------------|----------------|-------------------------------------|------|------------------------------------|-----|-------------------------|-----|------------------------------------|-----|------|--|
|                    |                 |                | V <sub>CC</sub> = 1.8 V<br>± 0.15 V |      | V <sub>CC</sub> = 2.5 V<br>± 0.2 V |     | V <sub>CC</sub> = 2.7 V |     | V <sub>CC</sub> = 3.3 V<br>± 0.3 V |     |      |  |
|                    |                 |                | MIN                                 | MAX  | MIN                                | MAX | MIN                     | MAX | MIN                                | MAX |      |  |
| t <sub>pd</sub>    | A or B          | B or A         | 1.5                                 | 8.1  | 1                                  | 5.5 | 1                       | 5.7 | 1                                  | 5.0 | ns   |  |
| t <sub>en</sub>    | OE              | A or B         | 1.5                                 | 9.9  | 1                                  | 6.6 | 1.5                     | 7.7 | 1.5                                | 6.5 | ns   |  |
| t <sub>dis</sub>   | OE              | A or B         | 1.5                                 | 13.9 | 1                                  | 7.8 | 1.5                     | 8.1 | 1.5                                | 7.6 | ns   |  |
| t <sub>sk(o)</sub> |                 |                |                                     |      |                                    |     |                         |     |                                    | 1.5 | ns   |  |

## 7.8 Operating Characteristics

T<sub>A</sub> = 25°C

| PARAMETER   | TEST<br>CONDITIONS | V <sub>CC</sub> = 1.8 V | V <sub>CC</sub> = 2.5 V | V <sub>CC</sub> = 3.3 V | UNIT |
|---|--------------------|-------------------------|-------------------------|-------------------------|------|
|   |                    | TYP                     | TYP                     | TYP                     |      |
|   |                    | MIN                     | MAX                     | MIN                     |      |
| C <sub>pd</sub><br>Power dissipation capacitance<br>per transceiver | f = 10 MHz         | 34                      | 37                      | 38                      | pF   |
|   |                    | 3                       | 3                       | 4                       |      |

## 7.9 Typical Characteristics

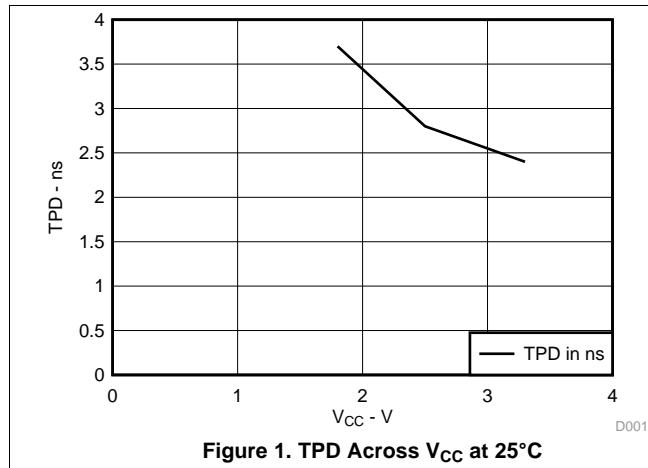


Figure 1. TPD Across V<sub>CC</sub> at 25°C


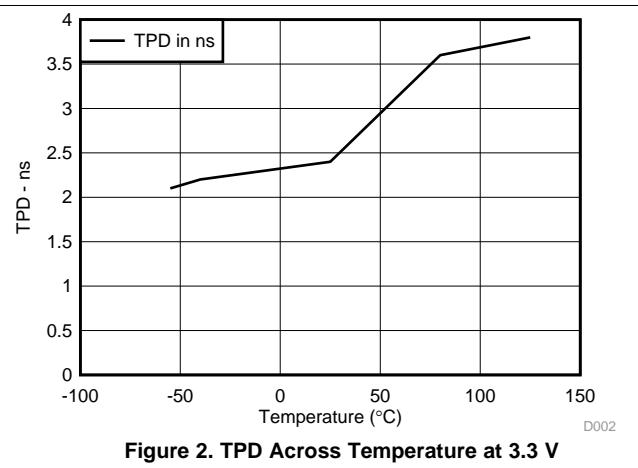


Figure 2. TPD Across Temperature at 3.3 V





## 8 Parameter Measurement Information

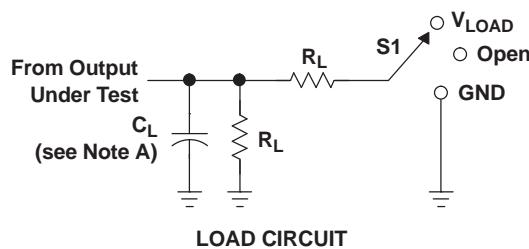

| TEST              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |

LOAD CIRCUIT

| $V_{CC}$                           | INPUTS   |                       | $V_M$      | $V_{LOAD}$        | $C_L$ | $R_L$        | $V_\Delta$ |
|------------------------------------|----------|-----------------------|------------|-------------------|-------|--------------|------------|
|                                    | $V_I$    | $t_r/t_f$             |            |                   |       |              |            |
| $1.8 \text{ V} \pm 0.15 \text{ V}$ | $V_{CC}$ | $\leq 2 \text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 1 k $\Omega$ | 0.15 V     |
| $2.5 \text{ V} \pm 0.2 \text{ V}$  | $V_{CC}$ | $\leq 2 \text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 500 $\Omega$ | 0.15 V     |
| 2.7 V                              | 2.7 V    | $\leq 2.5 \text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V      |
| $3.3 \text{ V} \pm 0.3 \text{ V}$  | 2.7 V    | $\leq 2.5 \text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V      |

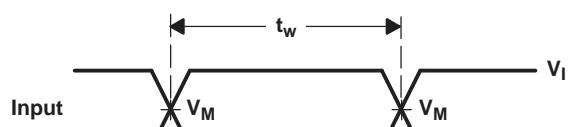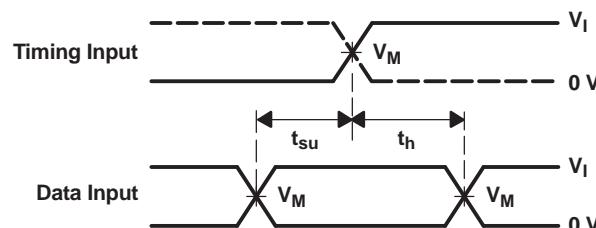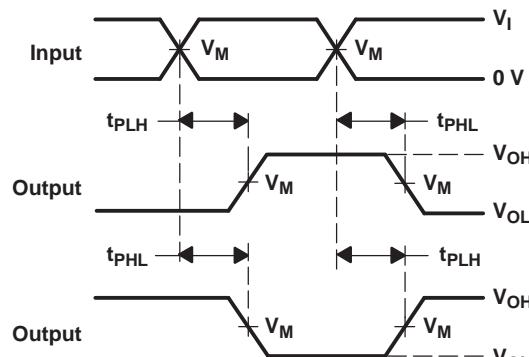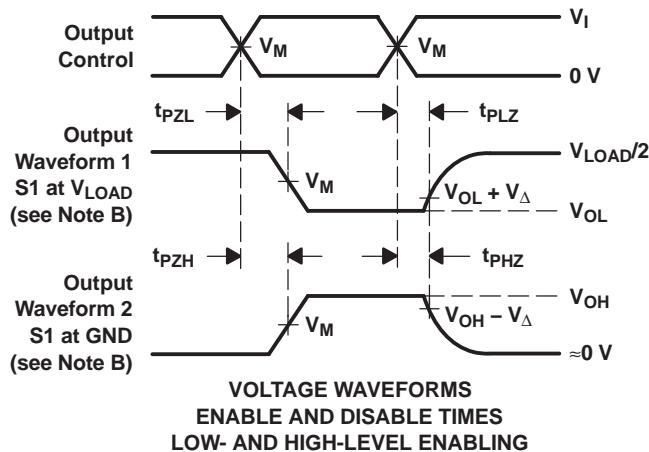VOLTAGE WAVEFORMS  
PULSE DURATIONVOLTAGE WAVEFORMS  
SETUP AND HOLD TIMESVOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES  
INVERTING AND NONINVERTING OUTPUTSVOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES  
LOW- AND HIGH-LEVEL ENABLING

NOTES:

- $C_L$  includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics: PRR  $\leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ .
- The outputs are measured one at a time, with one transition per measurement.
- $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- All parameters and waveforms are not applicable to all devices.

Figure 3. Load Circuit and Voltage Waveforms

## 9 Detailed Description

### 9.1 Overview


The SN74LVC16245A device is designed for asynchronous communication between data buses. The control-function implementation minimizes external timing requirements.

This device can be used as two 8-bit transceivers or one 16-bit transceiver. It allows data transmission from the A bus to the B bus or from the B bus to the A bus, depending on the logic level at the direction-control (DIR) input. The output-enable (OE) input can be used to disable the device so that the buses are effectively isolated. To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Inputs can be driven from either 3.3-V or 5-V devices. This feature allows the use of this device as a translator in a mixed 3.3-V/5-V system environment.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

### 9.2 Functional Block Diagram

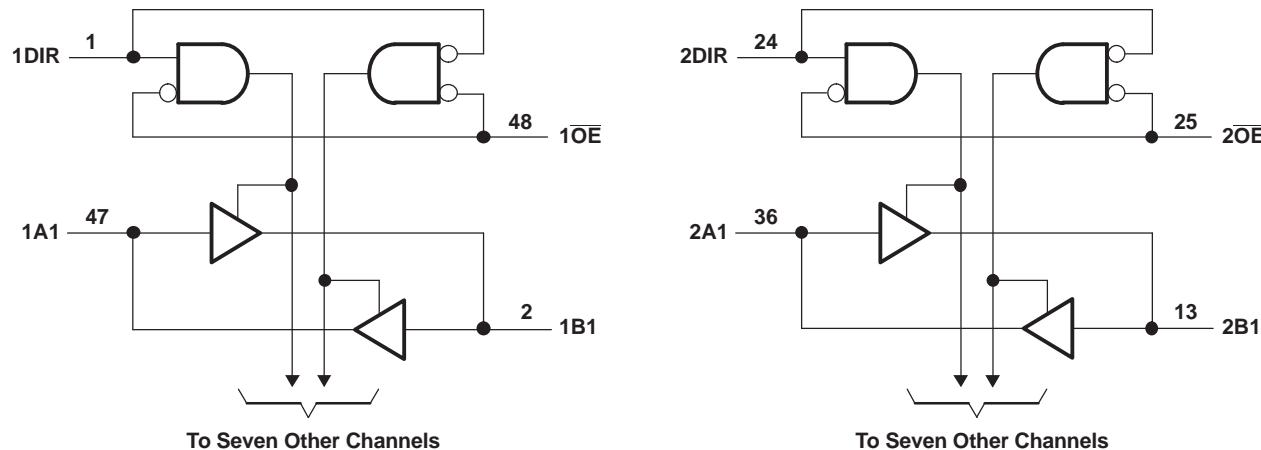

Pin numbers shown are for the DGG, DGV, and DL packages.

### 9.3 Feature Description

- Wide operating voltage range from 1.65 V to 3.6 V
- Allows down voltage translation
- Inputs accept voltages to 5.5 V
- $I_{off}$  feature allows voltages on the inputs and outputs when  $V_{CC}$  is 0 V

### 9.4 Device Functional Modes

**Table 3. Function Table**

| INPUTS          |     | OPERATION       |
|-----------------|-----|-----------------|
| $\overline{OE}$ | DIR |                 |
| L               | L   | B data to A bus |
| L               | H   | A data to B bus |
| H               | X   | Isolation       |

## 10 Application and Implementation

### 10.1 Application Information

The SN74LVC16245A device is a 16-bit bidirectional transceiver. This device can be used as two 8-bit transceivers or one 16-bit transceiver. It allows data transmission from the A bus to the B bus or from the B bus to the A bus, depending on the logic level at the direction-control (DIR) input. The output-enable (OE) input can be used to disable the device so that the buses are effectively isolated. The device has 5.5 V tolerant inputs at any valid  $V_{CC}$ . This allows it to be used in multi-power systems and for down translation as well.

### 10.2 Typical Application

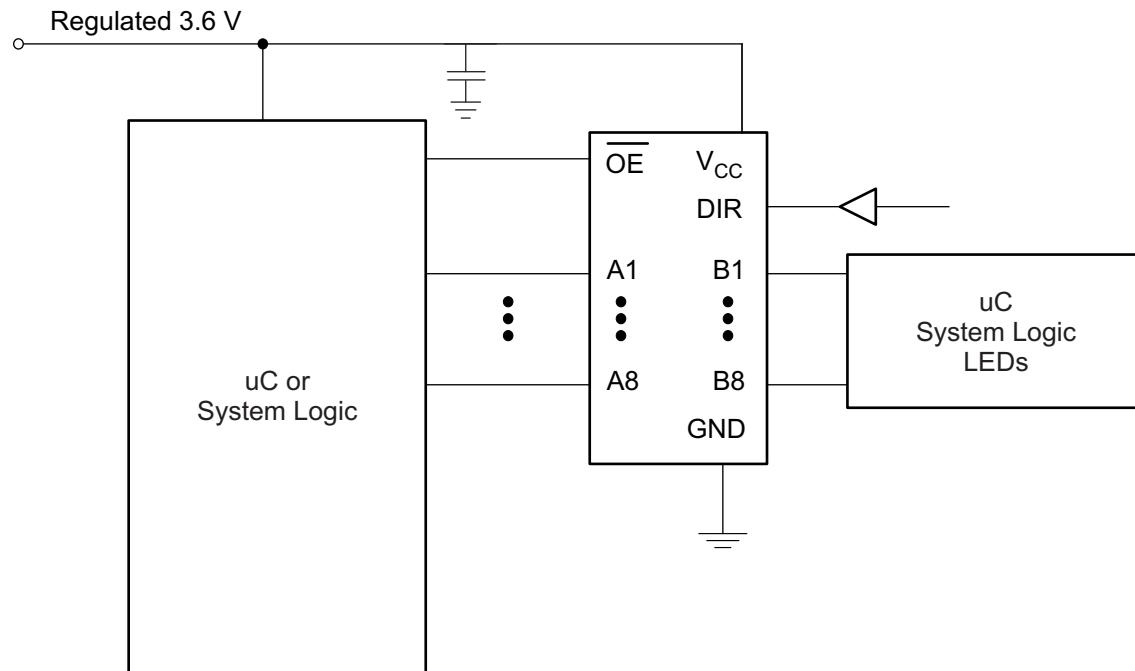


Figure 4. Typical Application Schematic

## Typical Application (continued)

### 10.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Care should be taken to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads; therefore, routing and load conditions should be considered to prevent ringing.

### 10.2.2 Detailed Design Procedure


#### 1. Recommended Input Conditions

- Rise time and fall time specs: See ( $\Delta t/\Delta V$ ) in the *Recommended Operating Conditions* table.
- Specified high and low levels: See ( $V_{IH}$  and  $V_{IL}$ ) in the *Recommended Operating Conditions* table.
- Inputs are overvoltage tolerant allowing them to go as high as 5.5 V at any valid  $V_{CC}$ .

#### 2. Recommend Output Conditions

- Load currents should not exceed 25 mA per output and 50 mA total for the part.
- Outputs should not be pulled above  $V_{CC}$ .

### 10.2.3 Application Curves

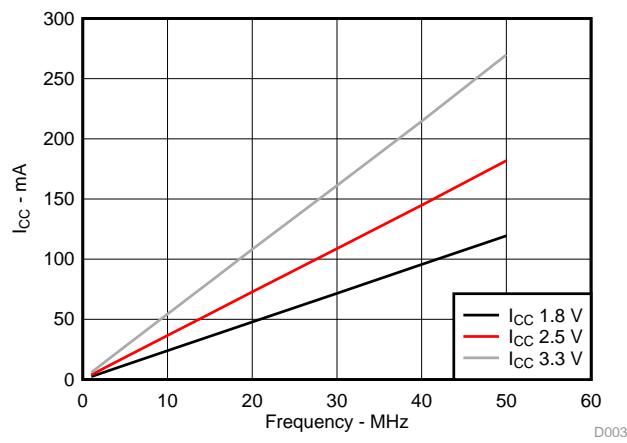

**Figure 5.  $I_{CC}$  vs Frequency**

## 11 Power Supply Recommendations

The power supply can be any voltage between the MIN and MAX supply voltage rating located in the *Recommended Operating Conditions* table.

Each  $V_{CC}$  pin should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1  $\mu F$  is recommended; if there are multiple  $V_{CC}$  pins, then 0.01  $\mu F$  or 0.022  $\mu F$  is recommended for each power pin. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. A 0.1  $\mu F$  and a 1  $\mu F$  are commonly used in parallel. The bypass capacitor should be installed as close to the power pin as possible for best results.

## 12 Layout

### 12.1 Layout Guidelines

When using multiple-bit logic devices, inputs should never float.

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Figure 6 specifies the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or  $V_{CC}$ , whichever makes more sense or is more convenient. It is generally acceptable to float outputs, unless the part is a transceiver. If the transceiver has an output enable pin, it will disable the output section of the part when asserted. This will not disable the input section of the IOs, so they cannot float when disabled.

### 12.2 Layout Example

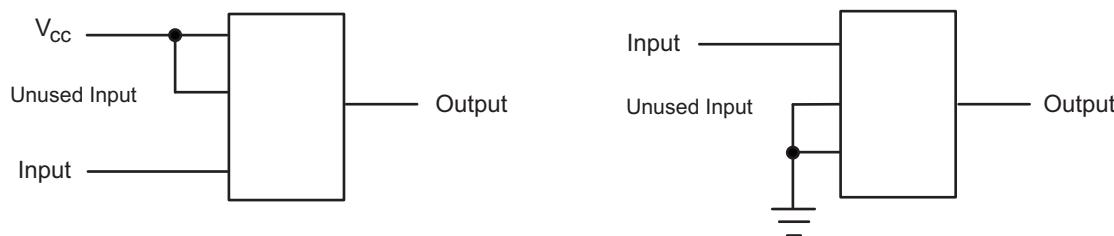


Figure 6. Layout Diagram

## 13 Device and Documentation Support

### 13.1 Trademarks

Widebus is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 13.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 13.3 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms and definitions.

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device  | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples |
|-------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|---------|
| 74LVC16245ADGGRG4 | ACTIVE        | TSSOP        | DGG             | 48   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | LVC16245A               | Samples |
| 74LVC16245ADGVRE4 | ACTIVE        | TVSOP        | DGV             | 48   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | LD245A                  | Samples |
| SN74LVC16245ADGGR | ACTIVE        | TSSOP        | DGG             | 48   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | LVC16245A               | Samples |
| SN74LVC16245ADGVR | ACTIVE        | TVSOP        | DGV             | 48   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | LD245A                  | Samples |
| SN74LVC16245ADL   | ACTIVE        | SSOP         | DL              | 48   | 25          | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | LVC16245A               | Samples |
| SN74LVC16245ADLR  | ACTIVE        | SSOP         | DL              | 48   | 1000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | LVC16245A               | Samples |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



www.ti.com


## PACKAGE OPTION ADDENDUM

20-Jan-2021


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

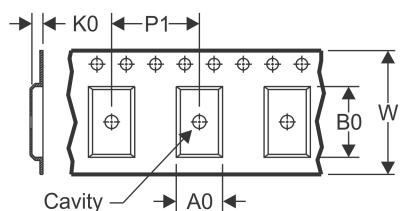**TAPE DIMENSIONS**


|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

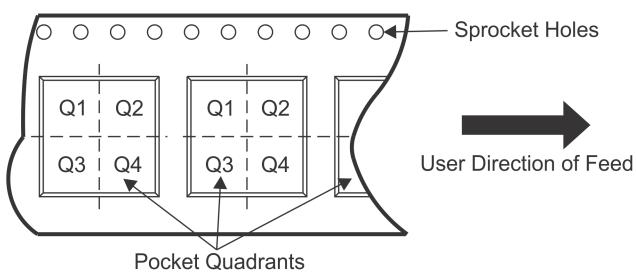**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LVC16245ADGGR | TSSOP        | DGG             | 48   | 2000 | 330.0              | 24.4               | 8.6     | 13.0    | 1.8     | 12.0    | 24.0   | Q1            |
| SN74LVC16245ADGVR | TVSOP        | DGV             | 48   | 2000 | 330.0              | 16.4               | 7.1     | 10.2    | 1.6     | 12.0    | 16.0   | Q1            |
| SN74LVC16245ADLR  | SSOP         | DL              | 48   | 1000 | 330.0              | 32.4               | 11.35   | 16.2    | 3.1     | 16.0    | 32.0   | Q1            |


**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LVC16245ADGGR | TSSOP        | DGG             | 48   | 2000 | 367.0       | 367.0      | 45.0        |
| SN74LVC16245ADGVR | TVSOP        | DGV             | 48   | 2000 | 853.0       | 449.0      | 35.0        |
| SN74LVC16245ADLR  | SSOP         | DL              | 48   | 1000 | 367.0       | 367.0      | 55.0        |

DL (R-PDSO-G48)

PLASTIC SMALL-OUTLINE PACKAGE

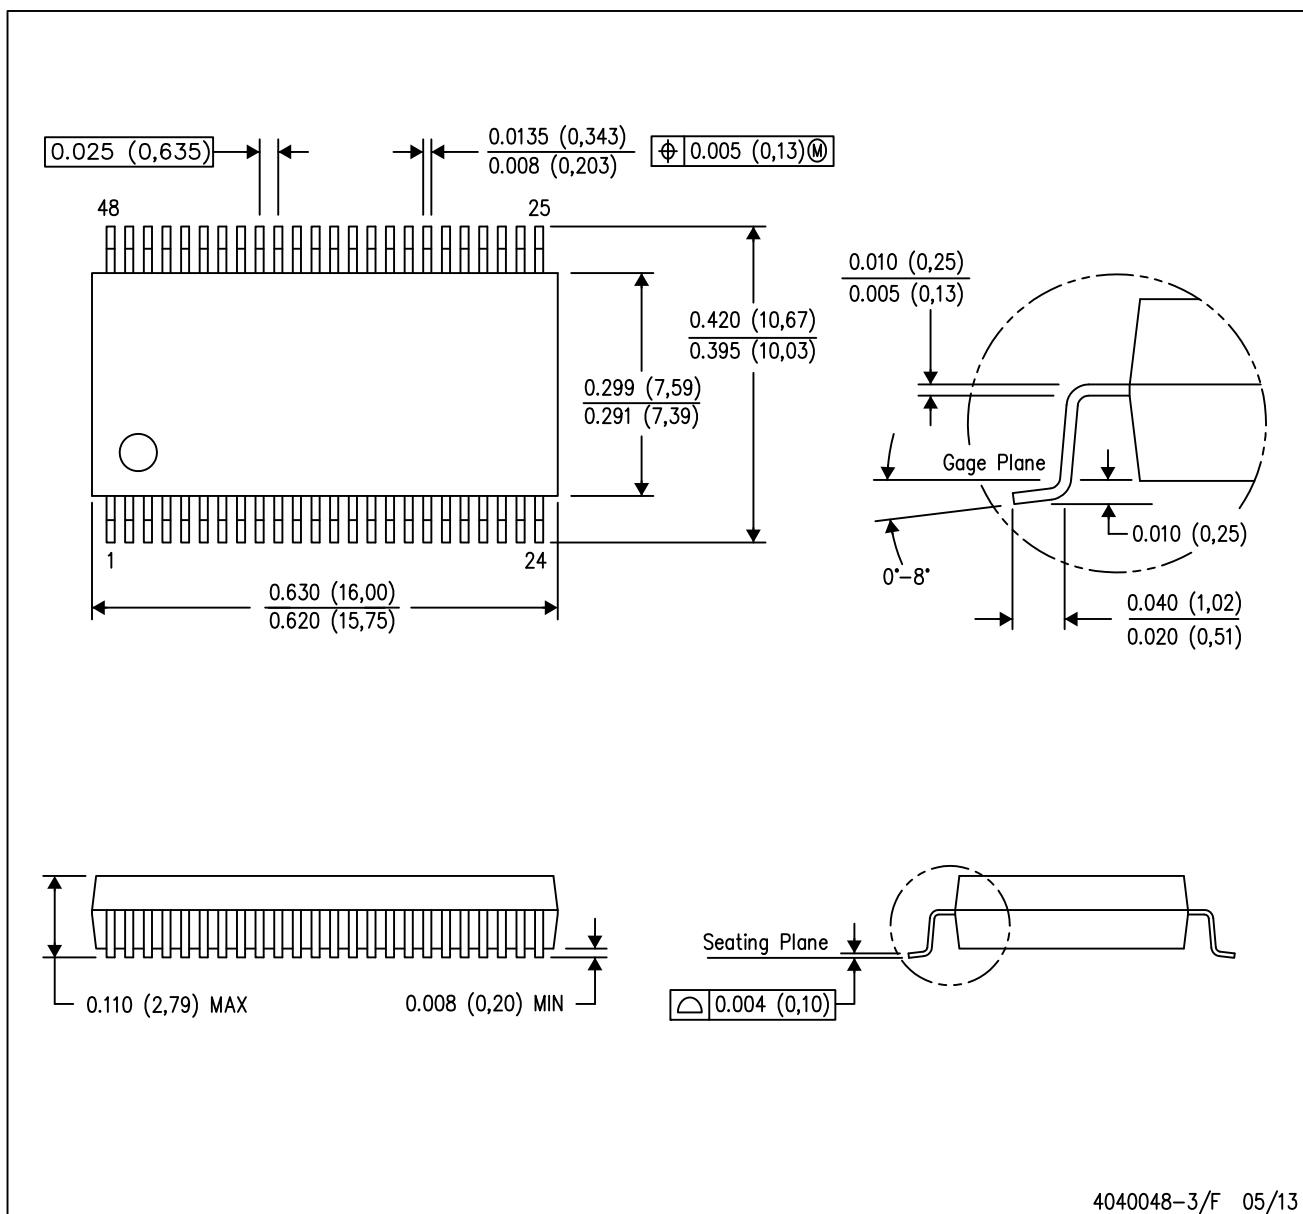

NOTES:


- All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.

## DGV (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE


24 PINS SHOWN

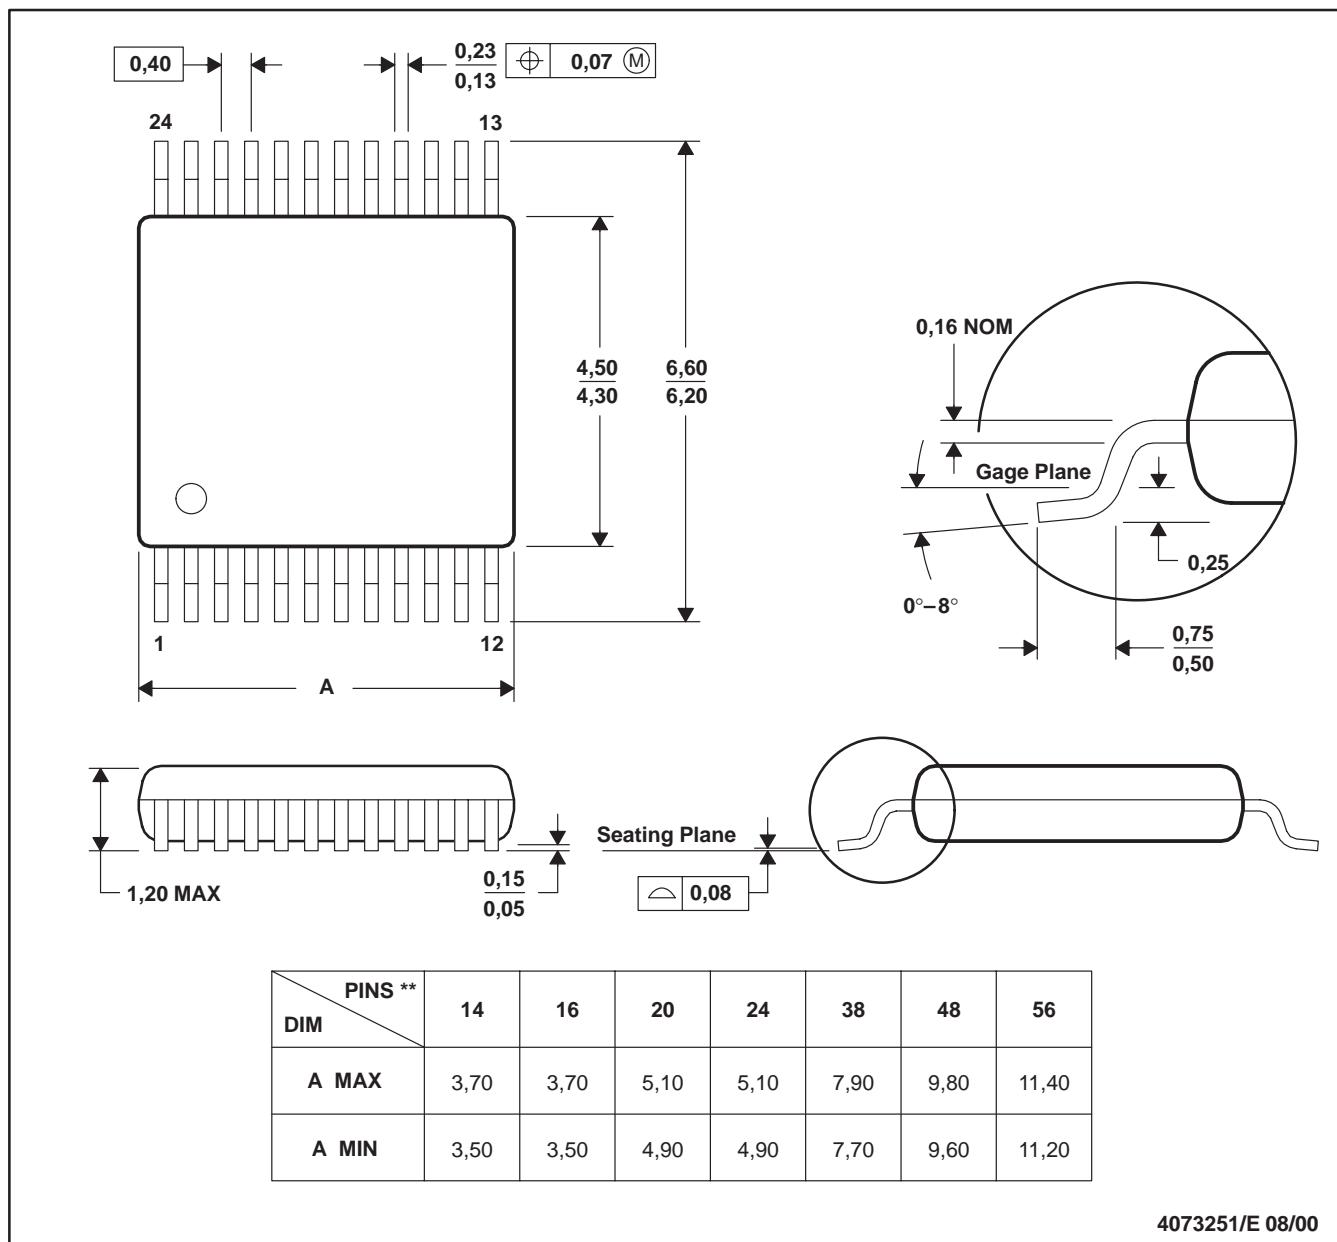

NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.  
 D. Falls within JEDEC: 24/48 Pins – MO-153  
 14/16/20/56 Pins – MO-194


## PACKAGE OUTLINE

**DGG0048A**



## **TSSOP - 1.2 mm max height**

## SMALL OUTLINE PACKAGE

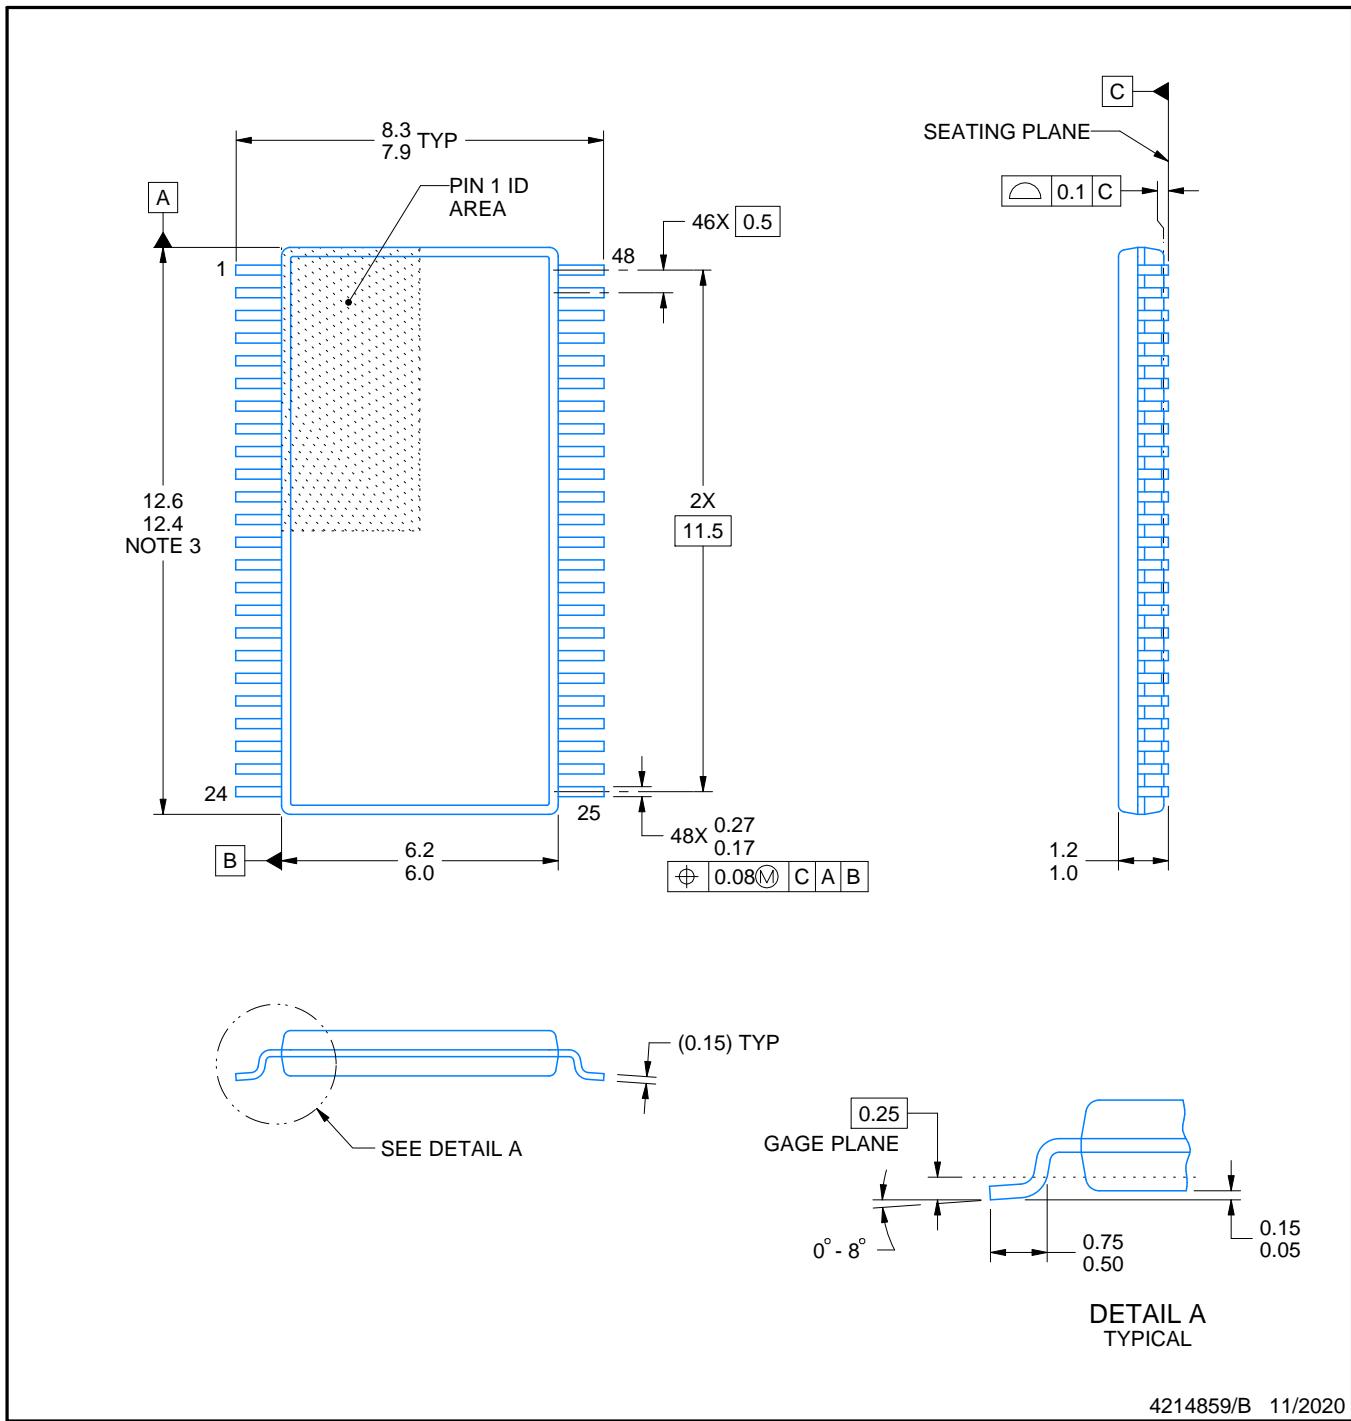

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.




# EXAMPLE BOARD LAYOUT


DGG0048A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

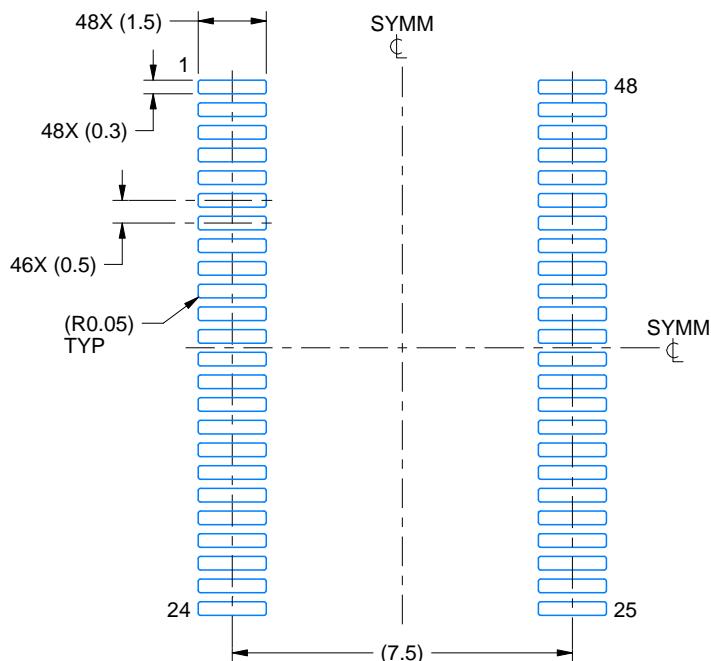

LAND PATTERN EXAMPLE  
SCALE:6X

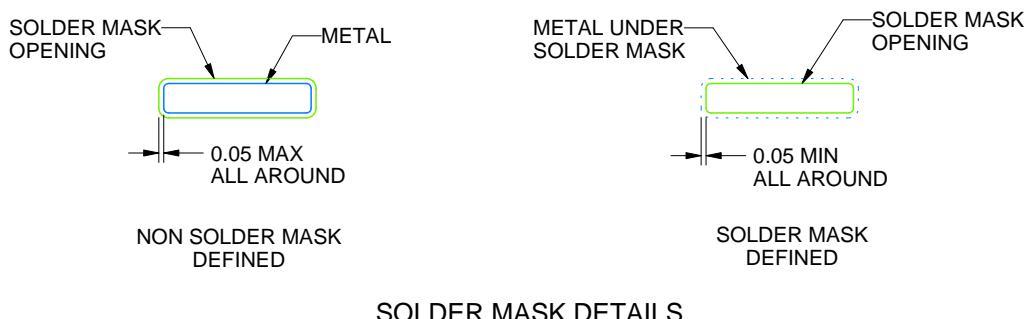

SOLDER MASK DETAILS

4214859/B 11/2020

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.


6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DGG0048A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

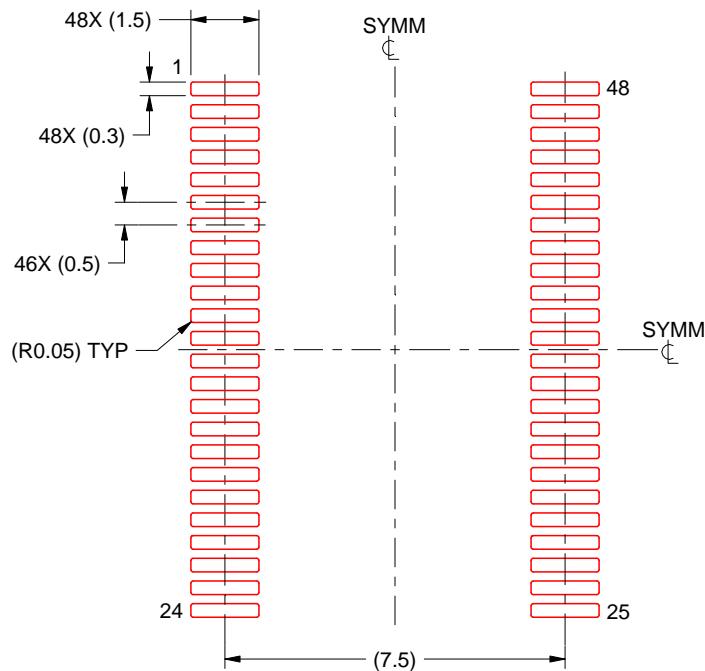

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:6X

4214859/B 11/2020


NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## DGG (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE

48 PINS SHOWN

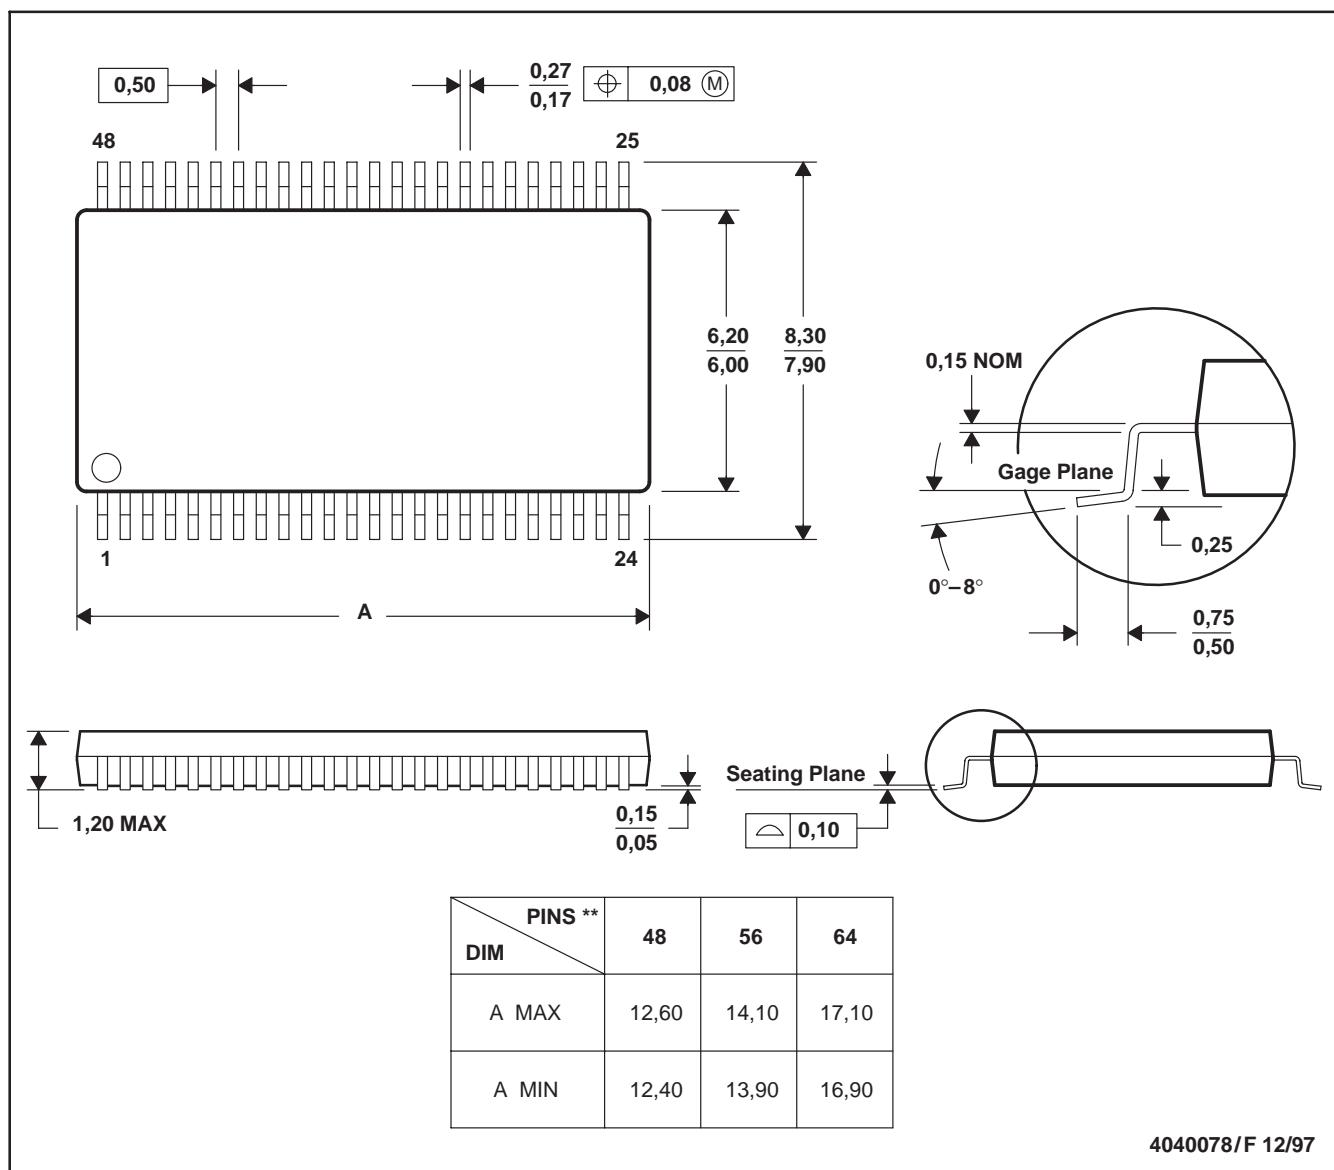

NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated